
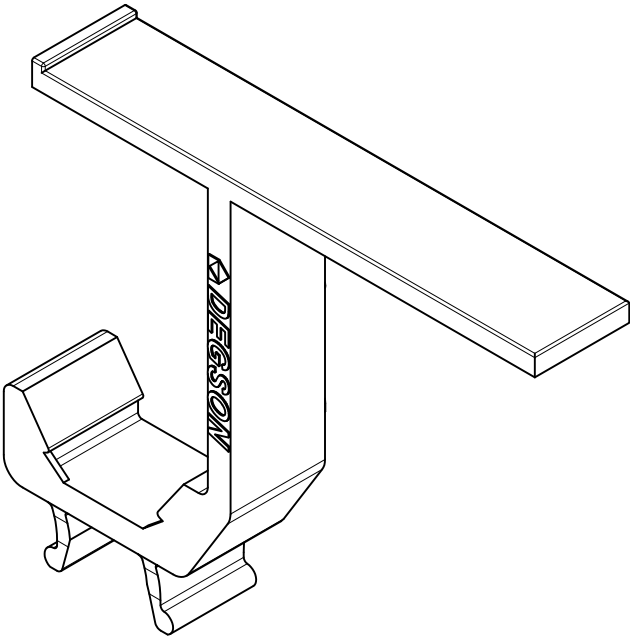
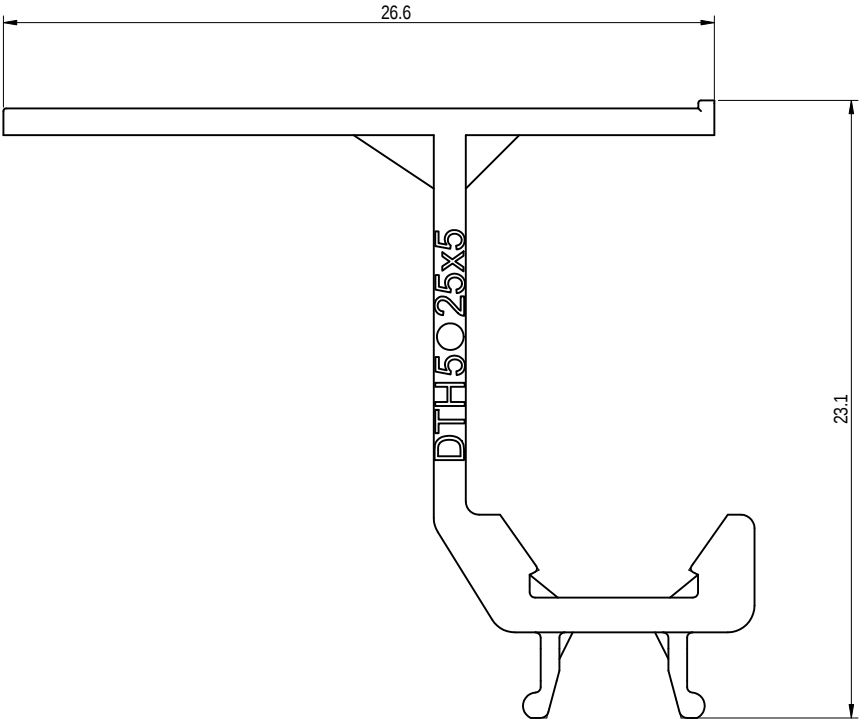


未注公差 (General Tolerances)(mm)														D
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	0.1/10 ±2'

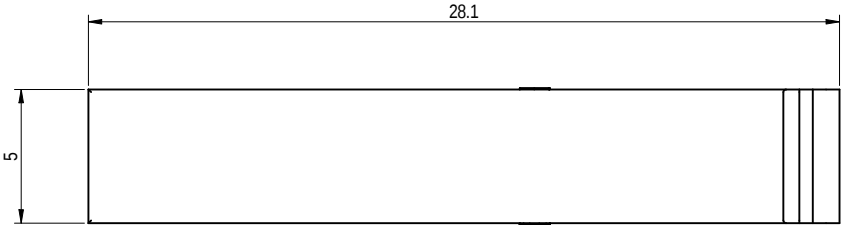

使用温度范围 / Operating temperature(°C)	-40~+105
符合 RoHS 环保要求 / Conform to RoHS	Yes
阻燃等级 / Flame class	UL94-V0

			MATERIAL: PA66		SURFACE/COLOR: /	
APPR: PengH			2022.06.13		NAME	
CHKD: GaoWG			2022.06.13		DTH5-25X5-1Y-00A(H)	
DRFT: XieXD			2022.06.13		DRAWING NO. /	
REV			ECN		TYPE CUSTOMER DRAWING	
00			/		DRAWING STATUS /	
/			XieXD		SCALE 5:1	
/			DATE		SHEET 1/1	
A3			DATE			

00	/	/	XieXD	2022.06.13
REV	ECN	DESCRIPTION	DRFT	DATE