



Coaxial Connectors


MM4829-2702

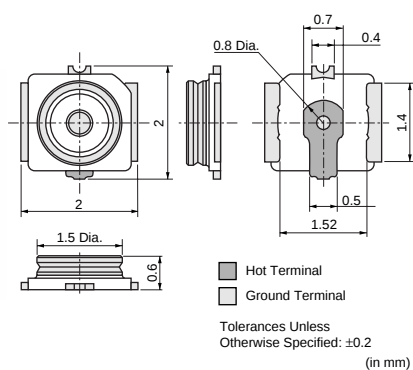


Dimension

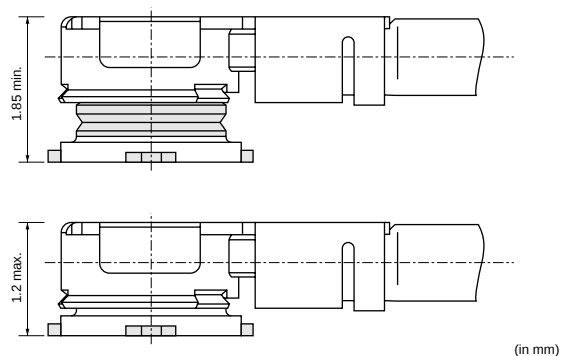


MM7329-2700

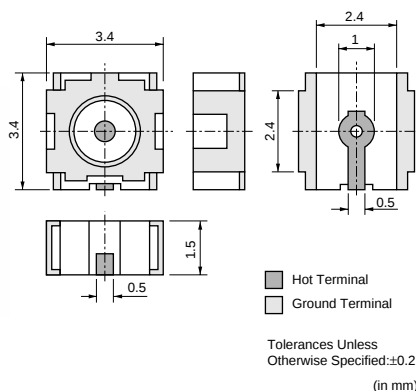


Dimensions

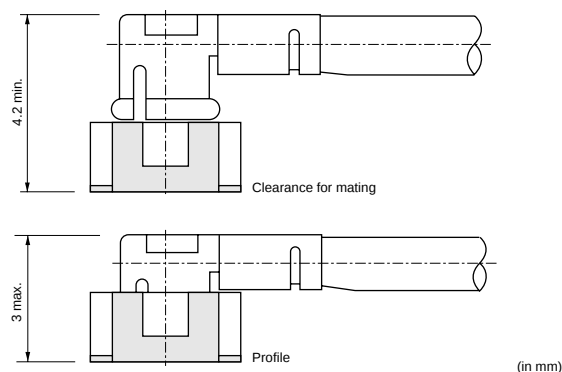

MM9329-2700

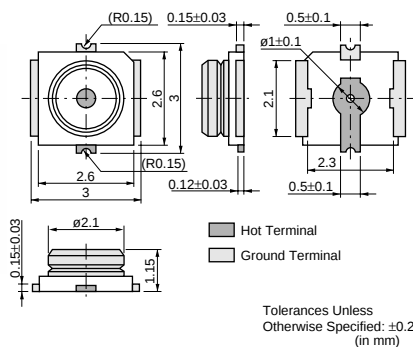


Dimension

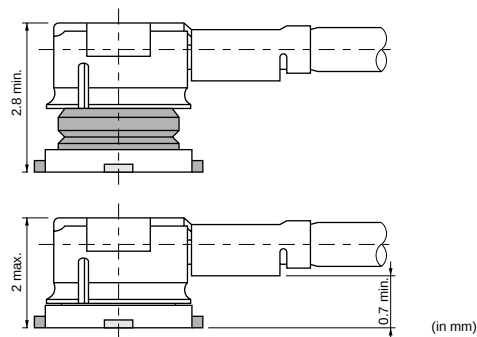


Part Number	Rated Voltage (V)	Frequency Rating (GHz)	Temperature Range	VSWR
MM4829-2702	250	to 6.0	-40 to +85degree C	1.3 max. (DC to 3GHz)
MM7329-2700	250	to 3.0	-40 to +90degree C	1.3 max.
MM7329-2702	250	to 3.0	-40 to +90degree C	1.3 max.
MM9329-2700	250	to 6.0	-40 to +90degree C	1.2 max. (DC to 3GHz)
MXFG76_TYPE	250	to 3.0	-40 to +90degree C	1.3 max.
MXFK81_TYPE	250	to 3.0	-40 to +90degree C	1.3 max.
MXHP32_TYPE	250	to 6.0	-40 to +85degree C	1.3 max.(DC to 3GHz)
MXTK88_TYPE	250	to 6.0	-40 to +90degree C	1.2 max.(DC to 3GHz)
MXTK92_TYPE	250	to 6.0	-40 to +90degree C	1.2 max.(DC to 3GHz)

Impedance: 50ohm


Coaxial Connectors with Switches

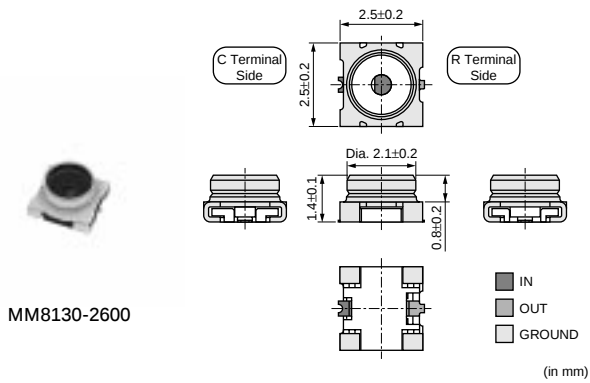



Measurement Probe (P/N:MM126036)

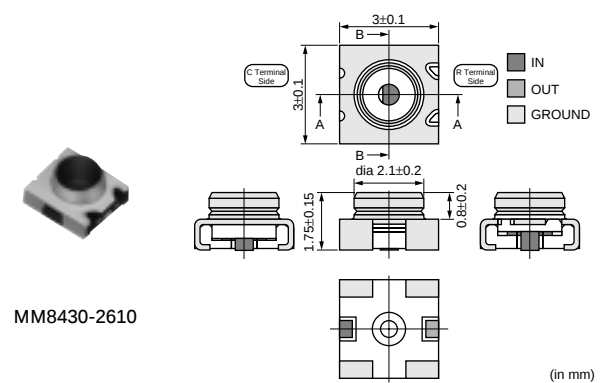

Measurement Probe(P/N:MXHS83QE3000)

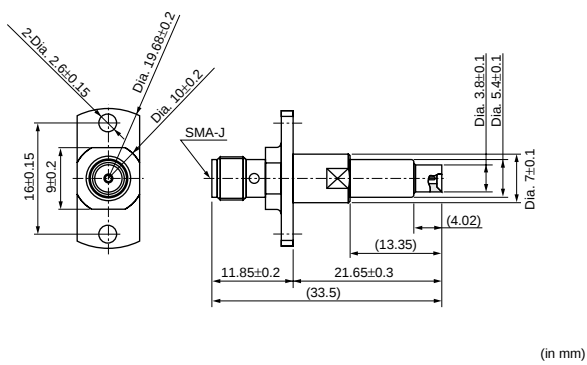

Measurement Probe(P/N:MXHS83QH3000)

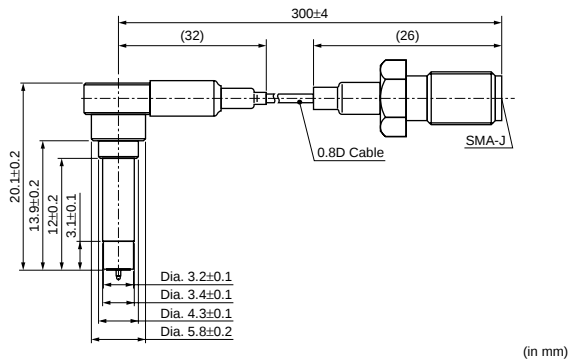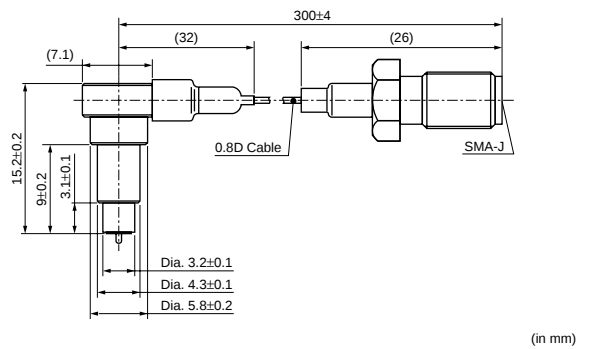

Part Number	Rated Voltage (Vrms)	Frequency Rating (GHz)	Temperature Range	VSWR
MM8130-2600	250	to 6	-40 to +85degree C	1.2 max. (DC to 3GHz)
MM8430-2610	250	to 6	-40 to +85degree C	1.2 max.(DC to 3GHz)

Impedance: 50ohm