
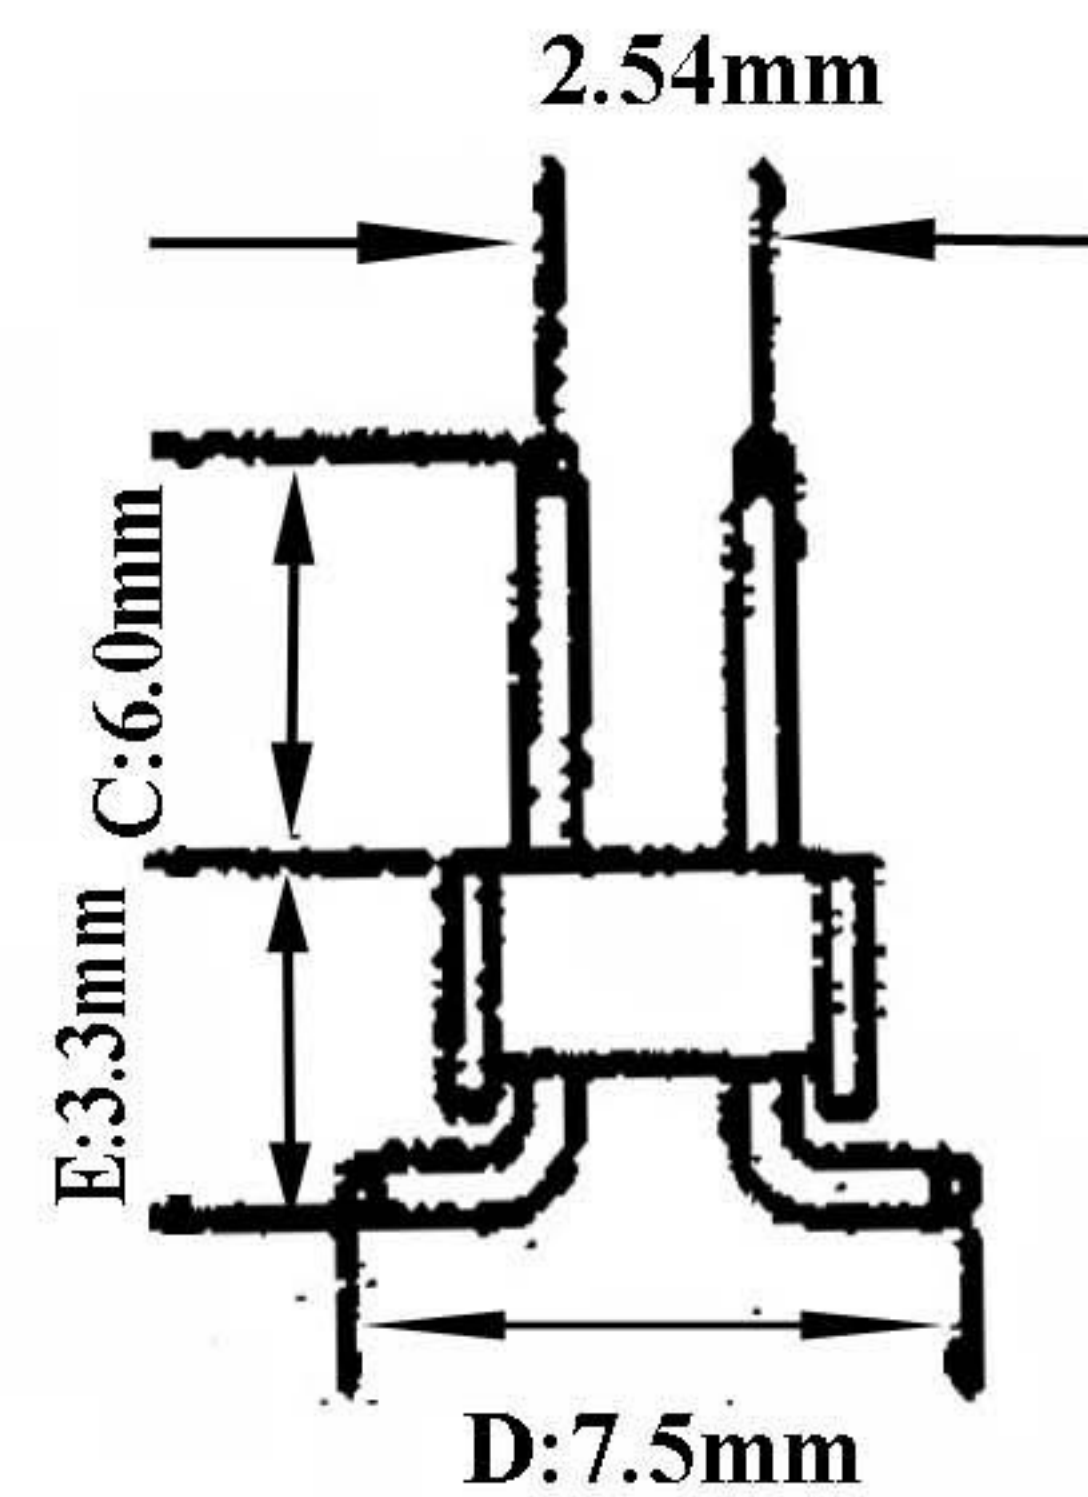
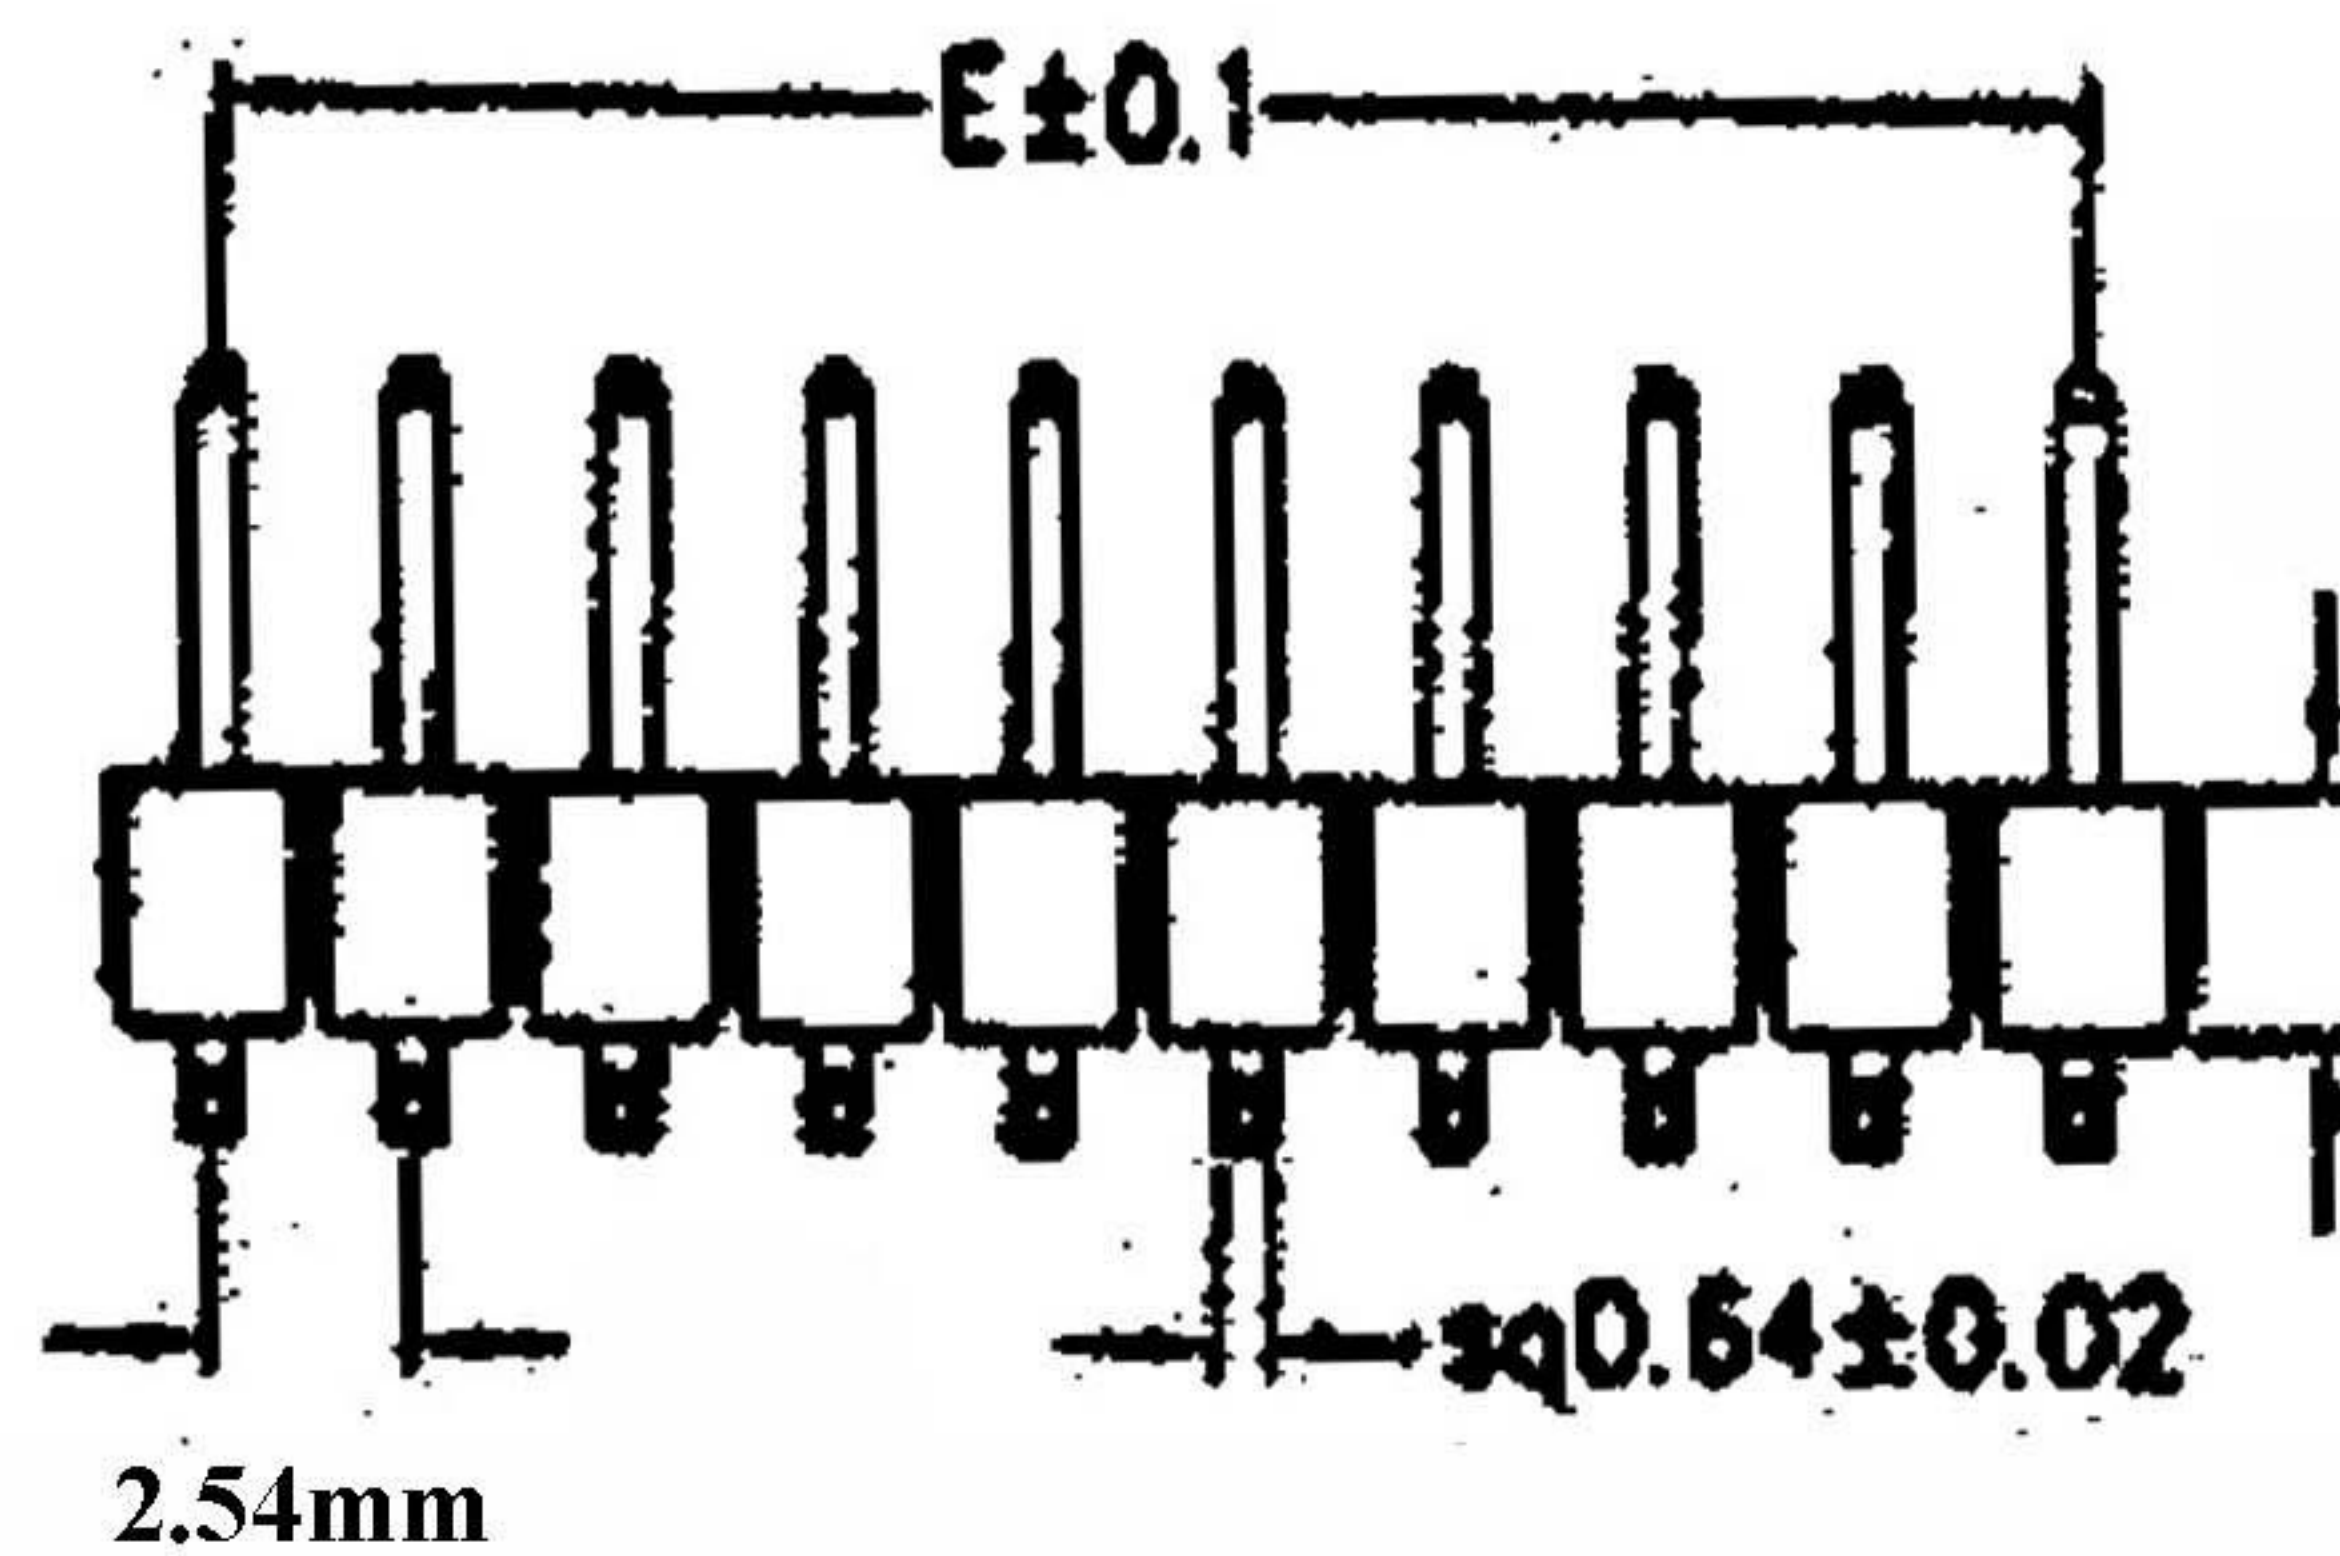
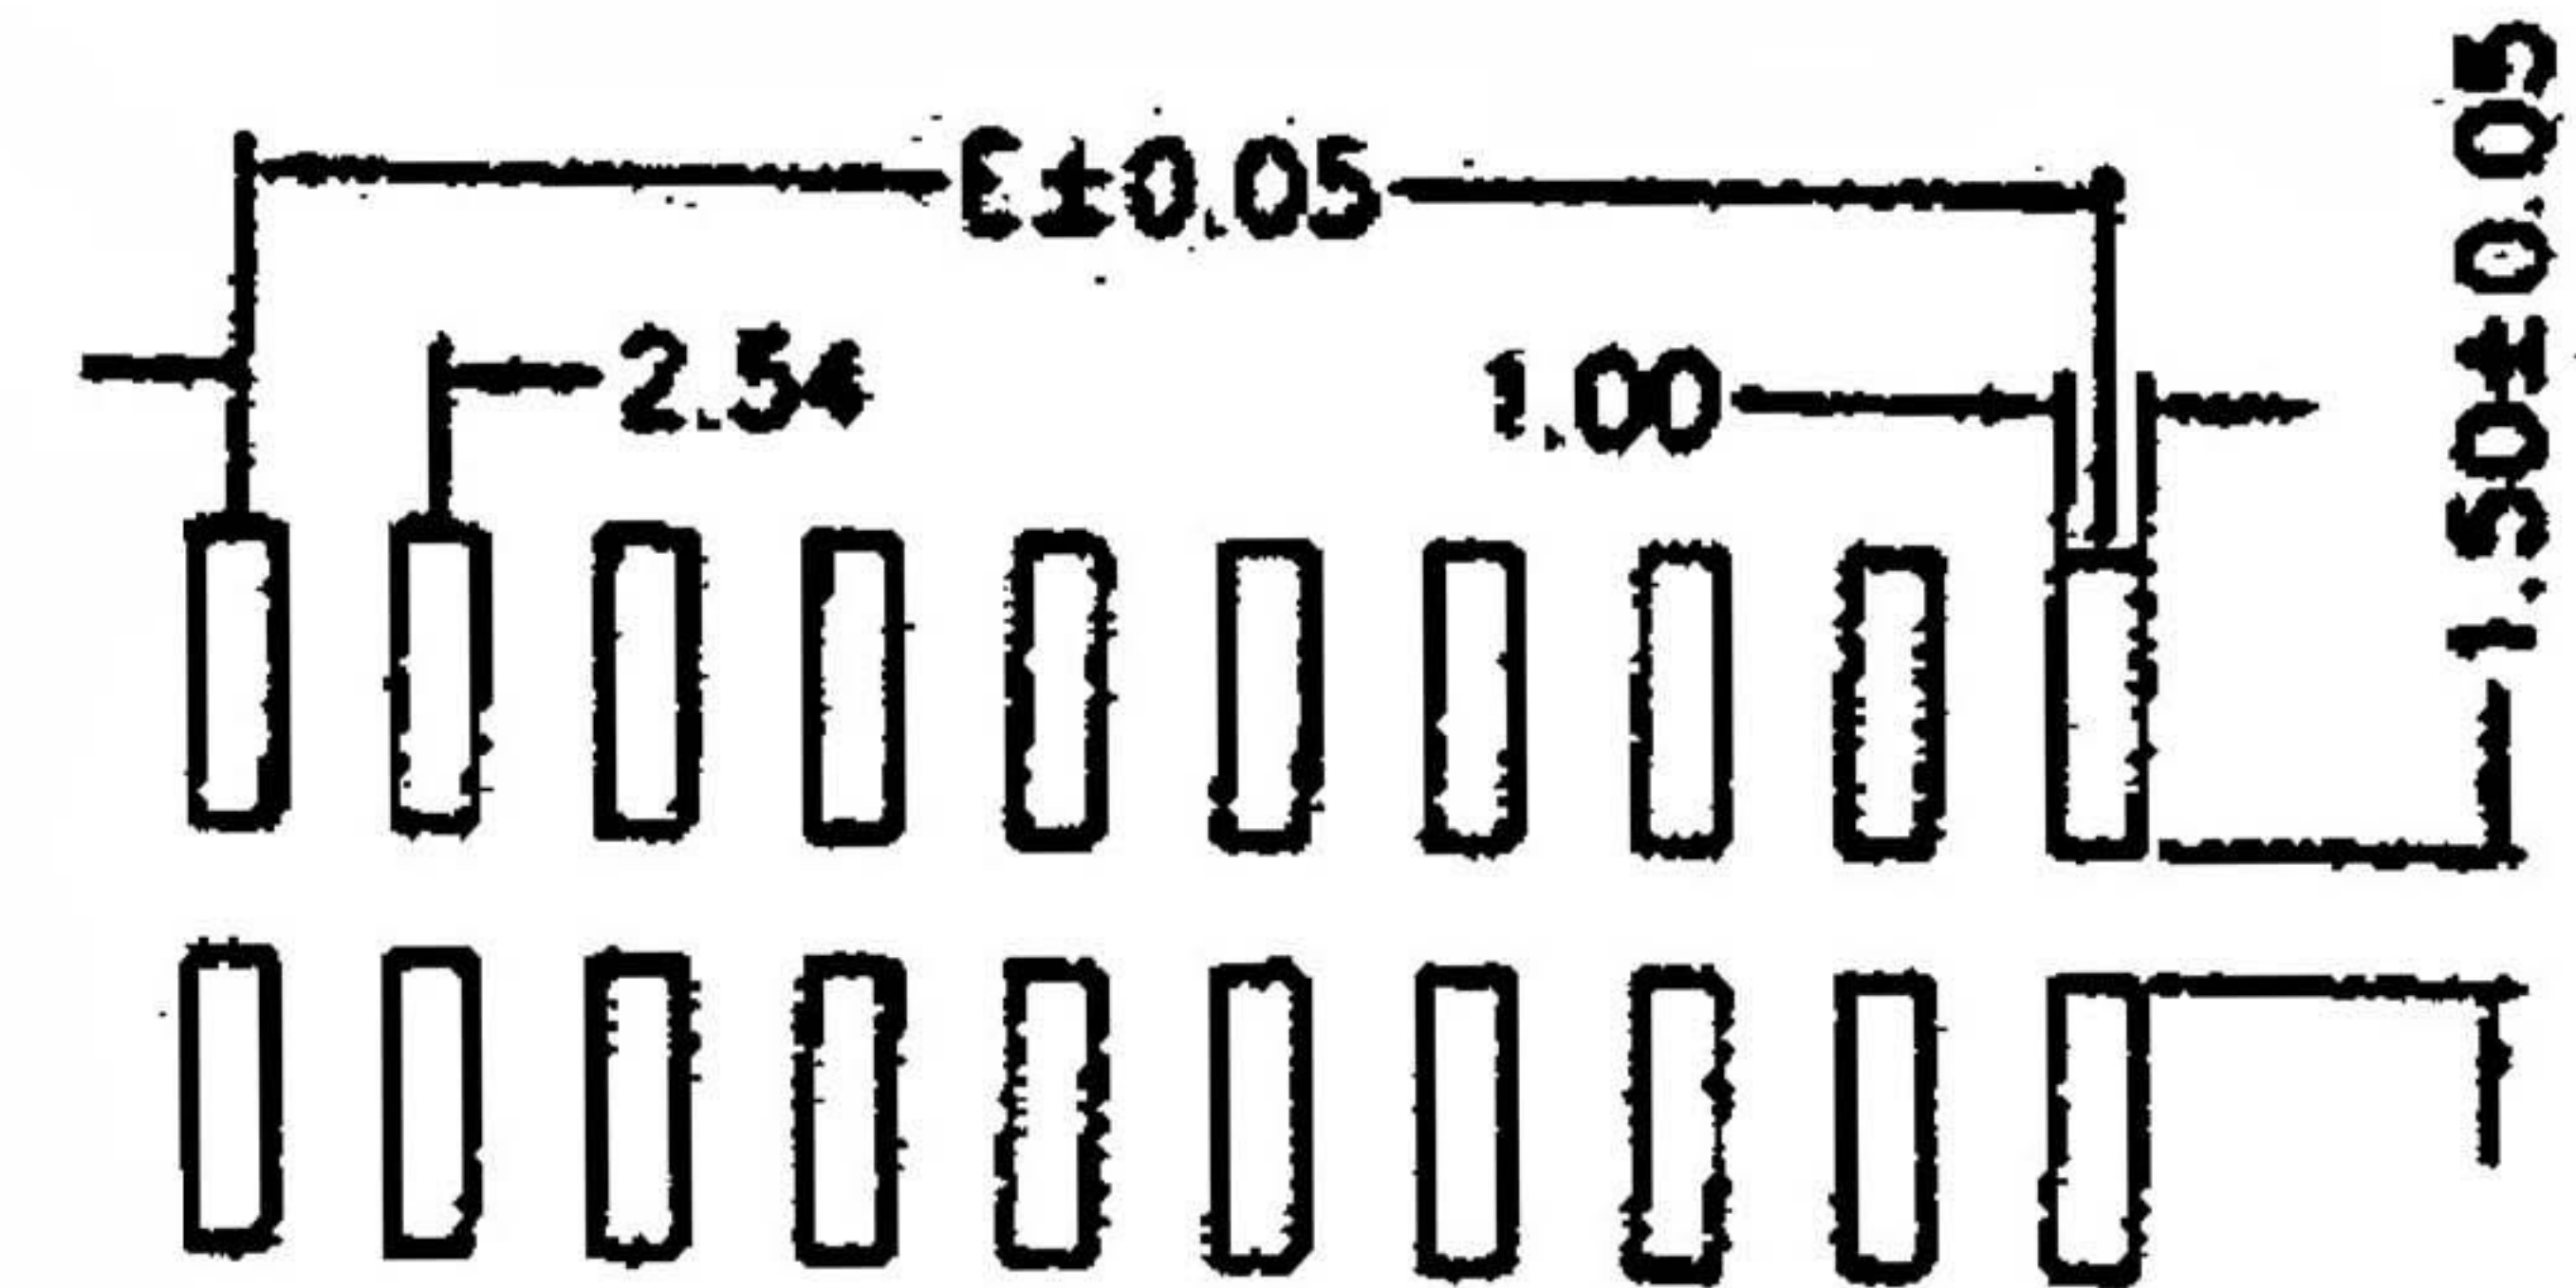


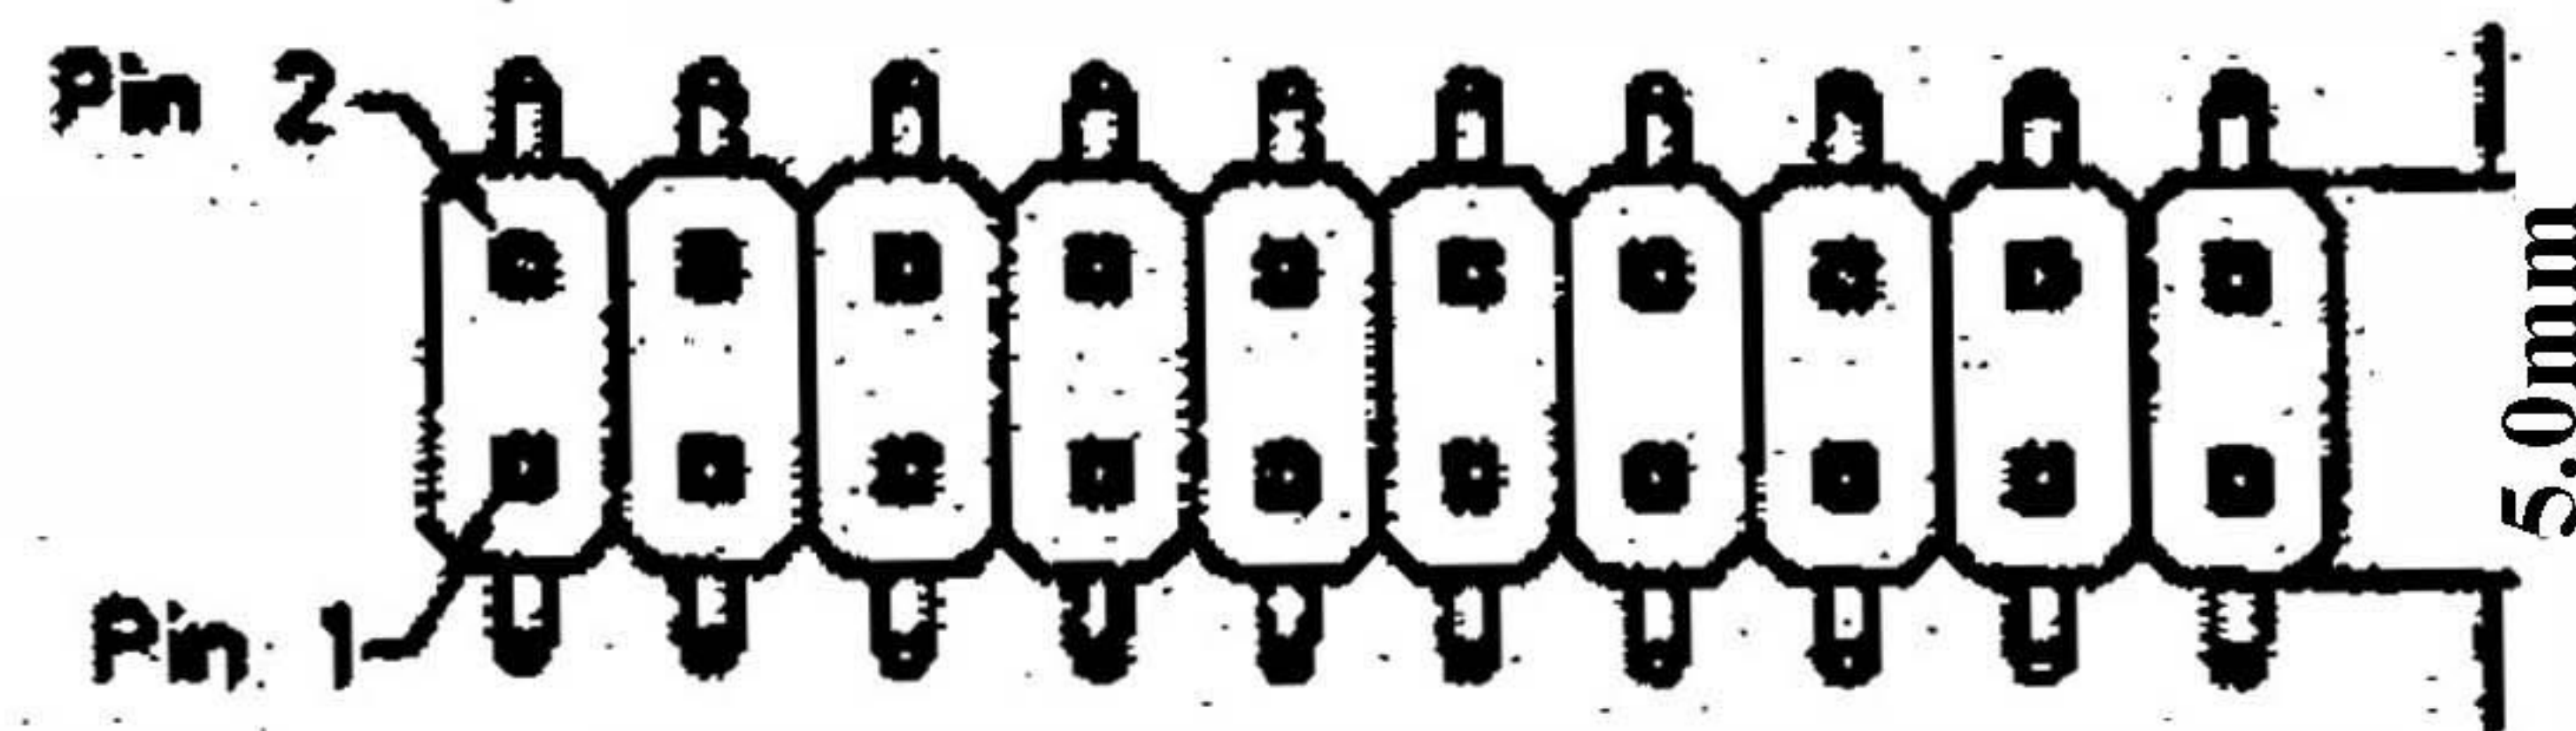

POLES	DIM E	POLES	DIM E
2	2.54	21	50.80
3	5.08	22	53.34
4	7.62	23	55.88
5	10.16	24	58.42
6	12.70	25	60.96
7	15.24	26	63.50
8	17.78	27	66.04
9	20.32	28	68.58
10	22.86	29	71.12
11	25.40	30	73.66
12	27.94	31	76.20
13	30.48	32	78.74
14	33.02	33	81.28
15	35.56	34	83.82
16	38.10	35	86.36
17	40.64	36	88.90
18	43.18	37	91.44
19	45.72	38	93.98
20	48.26	39	96.52
		40	99.06

MATERIAL

Insulator : NYLON 6T

Contact Pin : Brass

SPECIFICATION

Current Rate: 3 AMP

Insulation Resistance: 5000MΩ Min. at DC 500V

Contact Resistance : 20mΩ Max. at DC 100mA

Operation Temperature: -55℃ to + 105℃

RoHS
Compliant

T&T Connection System Co., Ltd.

APPD.
核准 BETTY

DWG.
製圖 Jolin

DATE 制表日
2007/3/22

SCALE
比例 參考

UNIT
單位 MM

PAGE
張數 1 OF 1

TOLERANCE
容許公差

SIZE.
紙張尺寸 A 4

REV.
版次 A

PART NAME 品名

2,54mm SMT DUAL ROW
PIN HEADER

PART NO.

料號 SPHDS-xx-6/3.3G