
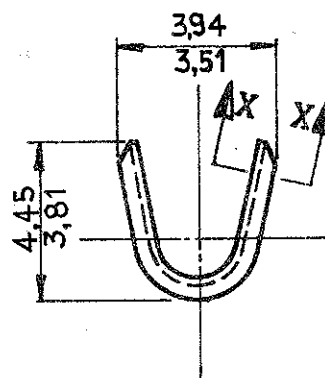
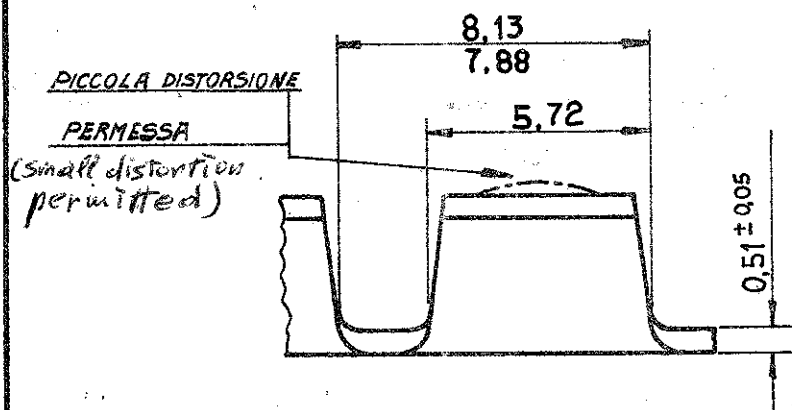


SEZIONE X X
(SECT. X X)

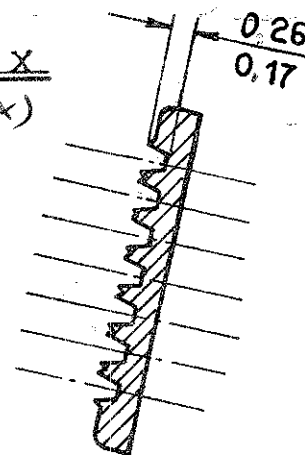

	BRONZO FOSFOROSO (PH/BR)	280002-3	T
	OTTONE (BRASS)	1-280002-1	T
STAGNATO (TIN PLTD)	OTTONE (BRASS)	280002-2	T
	OTTONE (BRASS)	280002-1	T
FINITURA (FINISH)	MATERIALE	AMP P.N.	REV.

△ CONFEZIONAMENTO: 20000 PEZZI/BOBINA (CON CARTA INTERPOSTA) - 3 BOBINE/SCATOLA
 PACKAGING: 20000 PCS/REEL (WITH INTERPOSED PAPER STRIP) - 3 REELS/BOX

T ₃ ADDED P/N 280002-3 PER EC 8700-0199-02 T ₂ ADDED SYMBOL Δ NEAR P/N 1-280002-1 T ₁ ADDED P/N 1-280002-1 PER EC 8700-0191-01				© 1968 BY AMP INCORPORATED. ALL RIGHTS RESERVED. AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING.		CUSTOMER COPY REFERENCE ONLY	
D ANNULATO P/N 280002-5 C AGGIUNTO 280002-5 B Ridisegnato e Aggiornato				MATERIAL AND FINISH VEDI TABELLA		AMP ITALIA VIA CERVINO 15 COLLEGNO (TORINO)	
LTR REVISION RECORD DR CHK DATE DE 8-9-77 APP				WIRE RANGE INSULATION 1500 3000 CMAI		CLASS AMPLIVAR TYPE AUTOMATIC	
TOLERANCE EXCEPT AS NOTED ± 0.4 1° 0'				SCALE LOC I A		NO C-280002 REV T ₃	
NAME				AMPLIVAR SPLICE			

DO NOT SCALE PRINT

DIMENSIONS IN MM

PRINT DIST