



MBR1635 THRU MBR16100

肖特基二极管 Schottky Rectifier

■特征 Features

- I_o 16A
- V_{RRM} 35V-100V
- 耐正向浪涌电流能力高
High surge current capability
- 封装: 模压塑料
Cases: Molded plastic

■用途 Applications

- 整流用 Rectifier

■极限值（绝对最大额定值）

Limiting Values (Absolute Maximum Rating)

参数名称 Item	符号 Symbol	单位 Unit	测试条件 Test Conditions	MBR16					
				35	45	50	60	90	100
反向重复峰值电压 Repetitive Peak Reverse Voltage	V _{RRM}	V		35	45	50	60	90	100
正向平均电流 Average Forward Current	I _{F(AV)}	A	正弦半波 60Hz, 电阻负载, Tc(Fig.1) 60HZ Half-sine wave, Resistance load, Tc(Fig.1)	16.0					
正向（不重复）浪涌电流 Surge(Non-repetitive)Forward Current	I _{FSM}	A	正弦半波 60Hz, 一个周期, Ta=25℃ 60Hz Half-sine wave ,1 cycle , Ta =25℃	150				250	
结温 Junction Temperature	T _J	℃		-55~+150					
储存温度 Storage Temperature	T _{STG}	℃		-55 ~ +150					

■电特性（ $T_a=25^\circ\text{C}$ 除非另有规定）

Electrical Characteristics ($T_a=25^\circ\text{C}$ Unless otherwise specified)


参数名称 Item	符号 Symbol	单位 Unit	测试条件 Test Condition		MBR16					
					35	45	50	60	90	100
正向峰值电压 Peak Forward Voltage	V _F	V	I _F =16.0A		0.65		0.75		0.85	
反向漏电流 Peak Reverse Current	I _{RRM1}	mA	V _{RM} =V _{RRM}	T _a =25℃	0.2		1.0		0.2	
	T _a =125℃			40		50		-		
热阻(典型) Thermal Resistance(Typical)	R _{θJ-C}	℃/W	结和壳之间 Between junction and case		3.0 ¹⁾					

备注: Notes:

¹⁾ 热电阻从结到本体,每管脚到散热片的尺寸为 2"×3"×0.25 的铝板

Thermal resistance from junction to case per leg with heat-sink size of 2"×3"×0.25" AL-plate

■外形尺寸和印记 Outline Dimensions and Mark

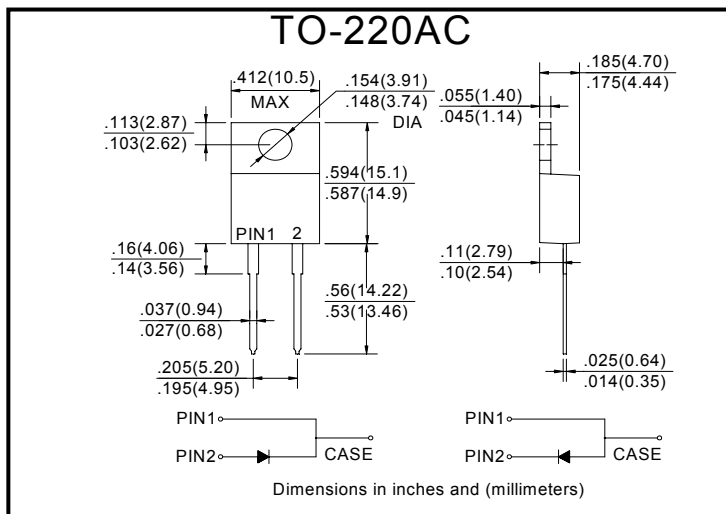

■特性曲线（典型） Characteristics(Typical)

图1: 正向电流降额曲线
FIG.1: FORWARD CURRENT DERATING CURVE

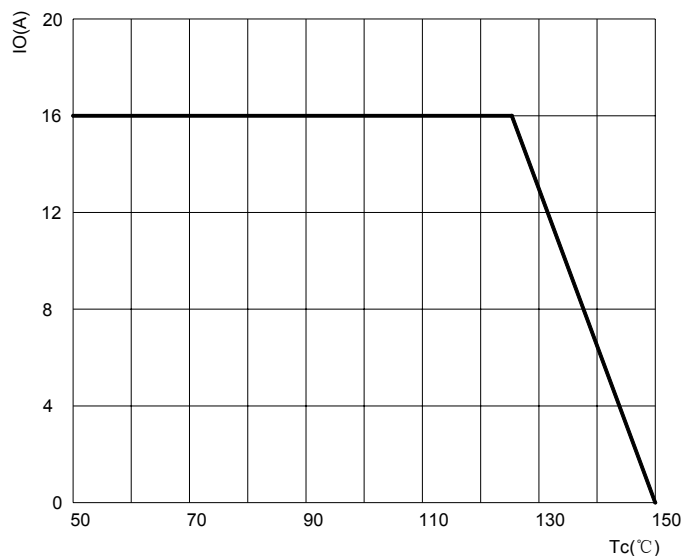


图2: 最大正向浪涌冲击耐受力
FIG.2: MAXIMUM NON-REPETITIVE FORWARD URGE CURRENT

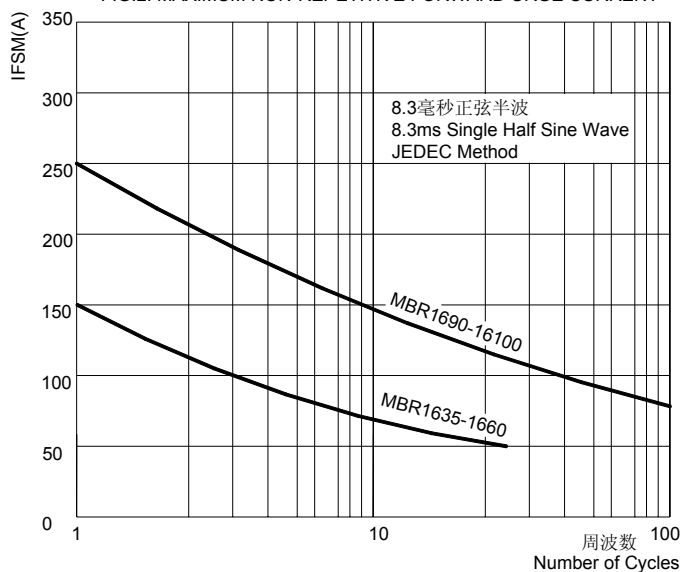


图3: 典型正向特性曲线
FIG.3: TYPICAL FORWARD CHARACTERISTICS

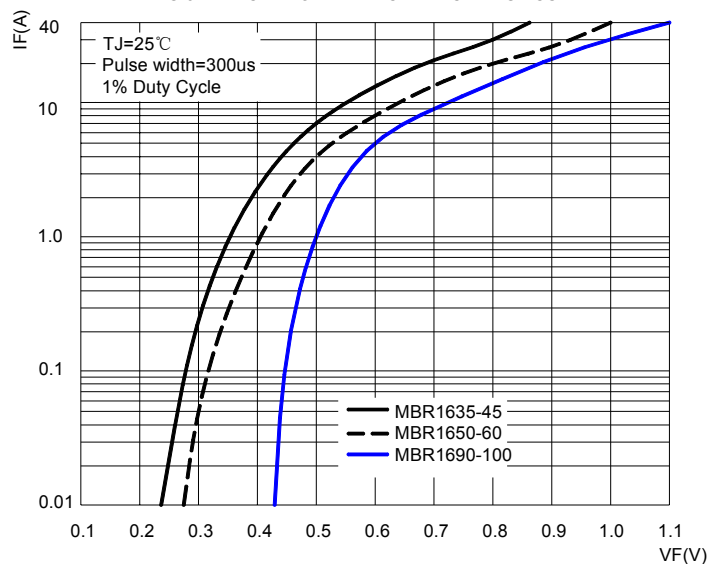


图4: 典型反向特性曲线
FIG.4: TYPICAL REVERSE CHARACTERISTICS

