


SPECIFICATION FOR APPROVAL


REF. :

PROD. NAME	SMD Power Inductor	ABC'S DWG NO.		SR0403□□□□L□-□□□	
		REV.	20121121-G	PAGE	1

I . Configuration and dimensions :

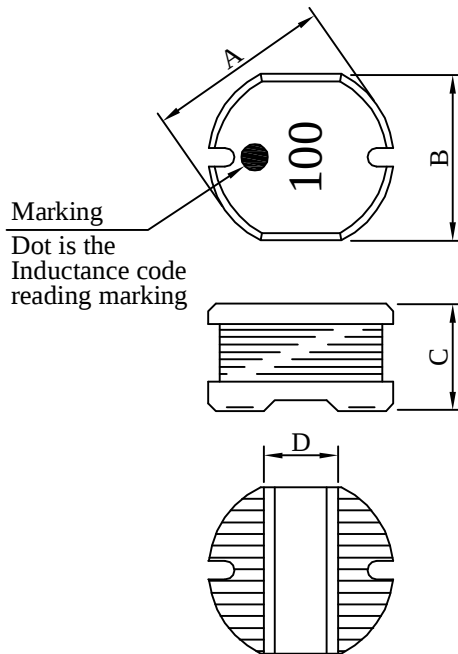

(PCB Pattern)



Unit : m/m


A	B	C	D	G	H	I
4.5 ±0.3	4.0 ±0.3	3.2 ±0.3	1.5 typ.	1.5 ref.	4.5 ref.	1.8 ref.

II . Description :

- a . Ferrite drum core construction.
- b . Enamelled copper wire : H class
- c . Product weight : 0.179 g (ref.)
- d . Moisture sensitivity Level 1
- e . Products comply with RoHS' requirements
- f . Halogen Free available

III . General specification :

- a . Storage temp. : -55℃ ----+125℃
- b . Operating temp. : -40℃----+125℃
(Temp. rise included)
- c . Resistance to solder heat : 250℃.10 secs.

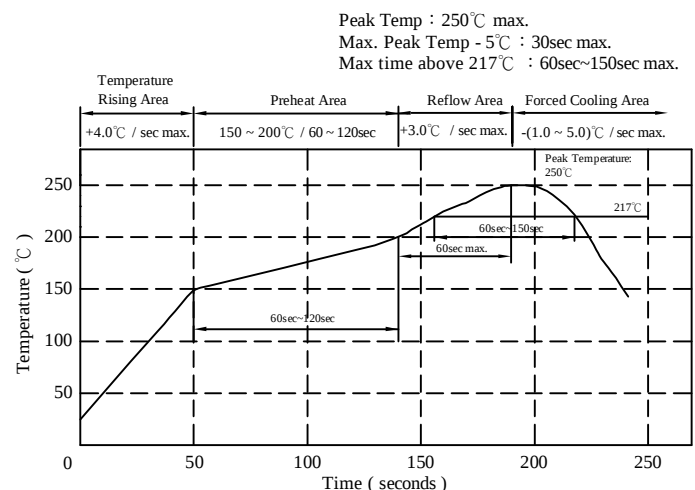

AR-001C



千如電子集團
ABC ELECTRONICS GROUP

SPECIFICATION FOR APPROVAL

REF. :

PROD. NAME	SMD Power Inductor	ABC'S DWG NO.		SR0403□□□□L□-□□□		
		REV.	20121121-G	PAGE	2	

IV . Electrical characteristics :

DWG No.	Inductance (μ H)	Q ref.	Test Freq. (Hz)		RDC (Ω) max.	IDC (A) max.
			L	Q		
SR04031R0ML□-□□□	1.0 $\pm$ 20%	28	1K	7.960M	0.033	3.800
SR04031R4ML□-□□□	1.4 $\pm$ 20%	28	1K	7.960M	0.038	3.300
SR04031R8ML□-□□□	1.8 $\pm$ 20%	28	1K	7.960M	0.042	2.910
SR04032R2ML□-□□□	2.2 $\pm$ 20%	28	1K	7.960M	0.047	2.600
SR04032R7ML□-□□□	2.7 $\pm$ 20%	28	1K	7.960M	0.052	2.430
SR04033R3ML□-□□□	3.3 $\pm$ 20%	28	1K	7.960M	0.058	2.150
SR04033R9ML□-□□□	3.9 $\pm$ 20%	28	1K	7.960M	0.076	1.980
SR04034R7ML□-□□□	4.7 $\pm$ 20%	28	1K	7.960M	0.094	1.700
SR04035R6ML□-□□□	5.6 $\pm$ 20%	28	1K	7.960M	0.101	1.600
SR04036R8ML□-□□□	6.8 $\pm$ 20%	28	1K	7.960M	0.117	1.410
SR04038R2ML□-□□□	8.2 $\pm$ 20%	28	1K	7.960M	0.132	1.260
SR0403100ML□-□□□	10.0 $\pm$ 20%	28	1K	2.520M	0.182	1.150
SR0403120ML□-□□□	12.0 $\pm$ 20%	28	1K	2.520M	0.210	1.050
SR0403150ML□-□□□	15.0 $\pm$ 20%	28	1K	2.520M	0.235	0.920
SR0403180ML□-□□□	18.0 $\pm$ 20%	25	1K	2.520M	0.338	0.840
SR0403220ML□-□□□	22.0 $\pm$ 20%	25	1K	2.520M	0.378	0.760
SR0403270ML□-□□□	27.0 $\pm$ 20%	20	1K	2.520M	0.522	0.710
SR0403330KL□-□□□	33.0 $\pm$ 10%	20	1K	2.520M	0.540	0.640
SR0403390KL□-□□□	39.0 $\pm$ 10%	20	1K	2.520M	0.587	0.590
SR0403470KL□-□□□	47.0 $\pm$ 10%	20	1K	2.520M	0.844	0.540
SR0403560KL□-□□□	56.0 $\pm$ 10%	20	1K	2.520M	0.937	0.500
SR0403680KL□-□□□	68.0 $\pm$ 10%	20	1K	2.520M	1.117	0.460
SR0403820KL□-□□□	82.0 $\pm$ 10%	25	1K	2.520M	1.270	0.420
SR0403101KL□-□□□	100.0 $\pm$ 10%	35	1K	0.796M	1.900	0.350
SR0403121KL□-□□□	120.0 $\pm$ 10%	50	1K	0.796M	2.200	0.320
SR0403151KL□-□□□	150.0 $\pm$ 10%	50	1K	0.796M	3.400	0.260
SR0403181KL□-□□□	180.0 $\pm$ 10%	50	1K	0.796M	3.900	0.240
SR0403221KL□-□□□	220.0 $\pm$ 10%	50	1K	0.796M	4.400	0.220
SR0403271KL□-□□□	270.0 $\pm$ 10%	45	1K	0.796M	5.000	0.200
SR0403331KL□-□□□	330.0 $\pm$ 10%	40	1K	0.796M	6.000	0.170
SR0403391KL□-□□□	390.0 $\pm$ 10%	40	1K	0.796M	6.400	0.150
SR0403471KL□-□□□	470.0 $\pm$ 10%	50	1K	0.796M	7.000	0.130
SR0403561KL□-□□□	560.0 $\pm$ 10%	50	1K	0.796M	7.800	0.120
SR0403681KL□-□□□	680.0 $\pm$ 10%	40	1K	0.796M	8.600	0.110
SR0403821KL□-□□□	820.0 $\pm$ 10%	38	1K	0.796M	12.000	0.100
SR0403102KL□-□□□	1000.0 $\pm$ 10%	38	1K	0.252M	14.000	0.090

- 1). ☐ : Packaging information : ☐ Code
- 2). "- ☐☐☐ " : Reference code
- 3). Electrical specifications at 25°C
- 4). IDC base on $\Delta L/L0A=10\%$ max.
& Temp. rise 40°C max.









AR-001C

SPECIFICATION FOR APPROVAL

REF. :

PROD. NAME	SMD Power Inductor	ABC'S DWG NO.		SR0403□□□□L□-□□□		
		REV.	20121121-G	PAGE	3	

V . Curve :

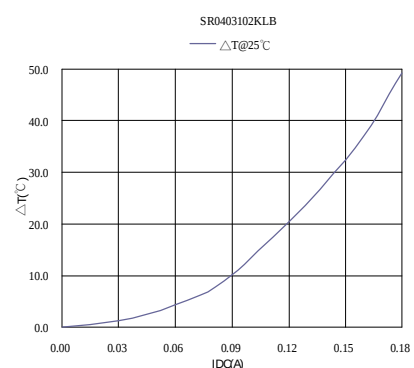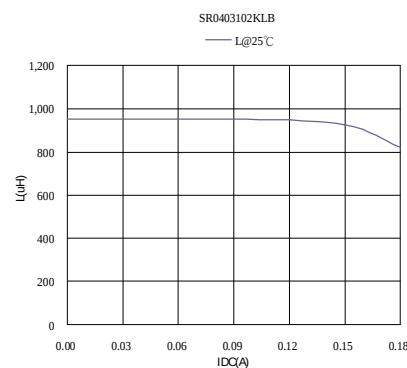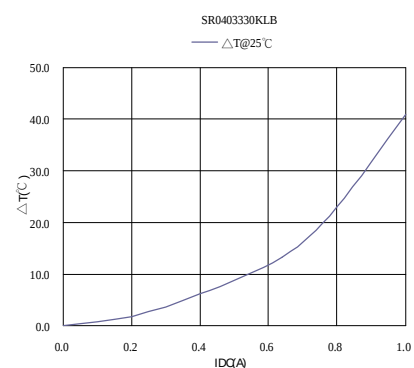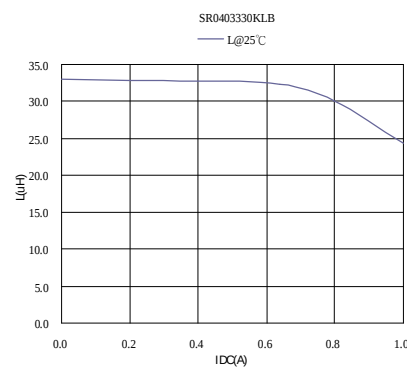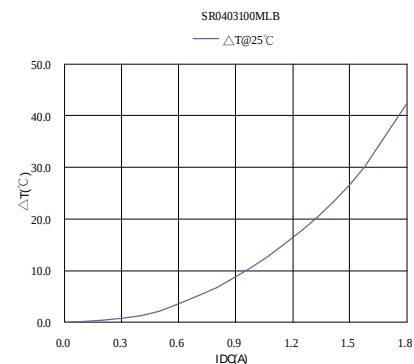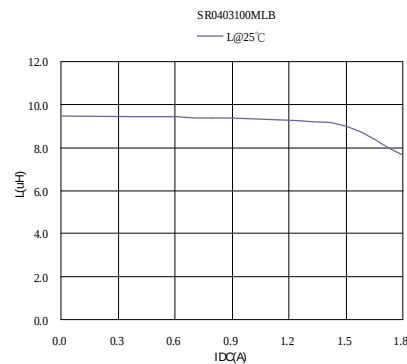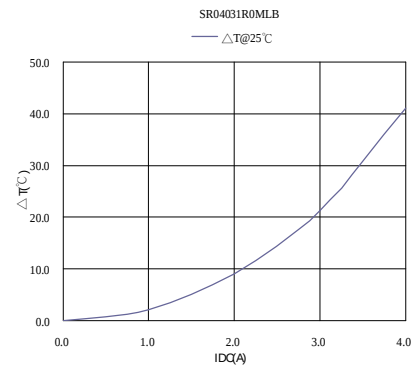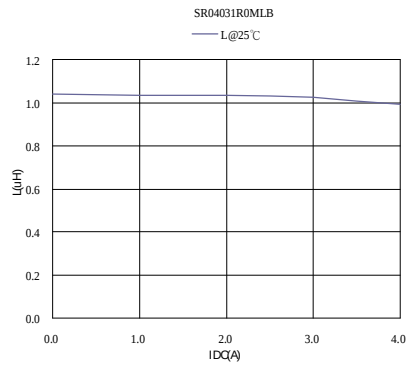

AR-001C



SPECIFICATION FOR APPROVAL

REF. :

PROD. NAME	SMD Power Inductor	ABC'S DWG NO.		SR0403□□□□L□-□□□		
		REV.	20121121-G	PAGE	4	

VI . Packaging information :

(1) Configuration

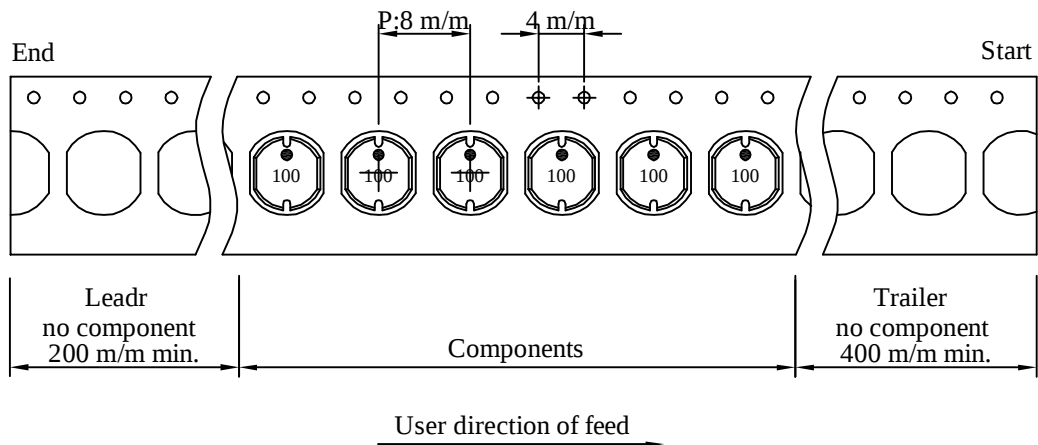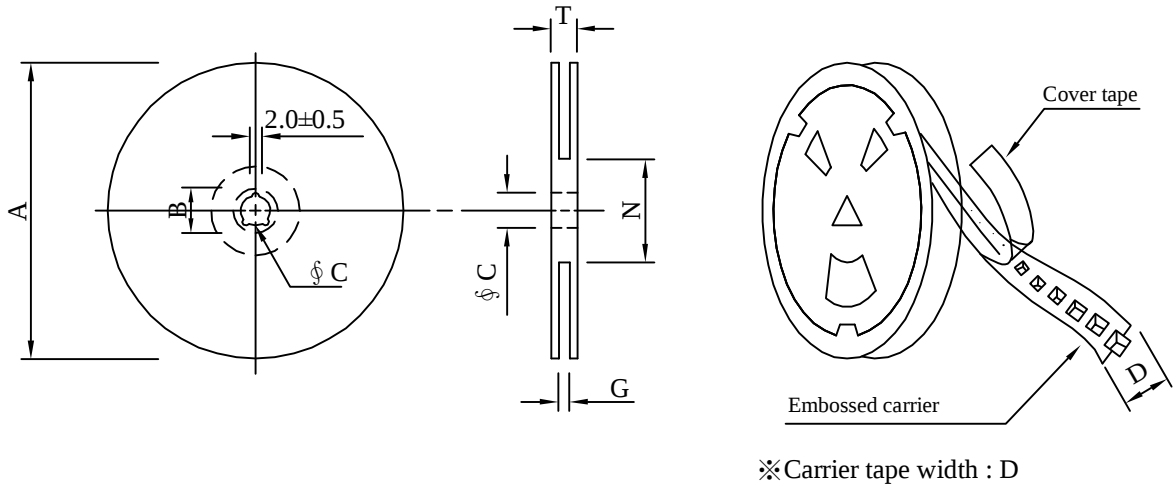

(2) Dimensions

Unit:m/m

Style	A	B	C	D	G	N	T
13 - 12	330	21±0.8	13±0.5	12	14 ⁺⁰	50 ⁻⁰	18.4

(3) Q'TY & G.W. Per package

Code	Inner : Reel			Outer : Carton		
	Q'TY (pcs)	G.W. (gw)	Style	Q'TY (pcs)	G.W. (Kg)	Size (cm)
B	2,000	1100	13 - 12	16,000	11.9	38 x 37 x 22
C	1,500	825	13 - 12	12,000	9.00	38 x 37 x 22

AR-001C

SPECIFICATION FOR APPROVAL

REF. :

PROD.	SMD Power Inductor	ABC'S DWG NO.	SR0403□□□□L□-□□□		
NAME		REV.	20121121-G	PAGE	5

VII . Reliability test :

Item	Reference documents	Test Condition	Test Specification
1.High Temperature Exposure	MIL-STD-202 Method 108	1.Temperature: 125℃ 2.Time:96 hours.	1.No mechanical and electrical damage. 2.Inductance shall not change more than ±10%.
2.Temperature Cycling	JESD22 Method JA-104	1.Temperature: -40℃ ~ 125℃ 2.Number of cycle:96 cycle 3.Dwell time:30 minutes	1.No mechanical and electrical damage. 2.Inductance shall not change more than ±10%.
3.Biased Humidity Test	MIL-STD-202 Method 103	1.Temperature: 85±5℃ 2.Time:96 Hours 3.Humidity: 85±5% RH.	1.No mechanical and electrical damage. 2.Inductance shall not change more than ±10%.
4.Operational Life	MIL-PRF-27	1.Temperature: 125℃ 2.Time:96 hours. 3.Apply rated current.	1.No mechanical and electrical damage. 2.Inductance shall not change more than ±10%.
5.Exeternal Visual	MIL-STD-883 Method 2009	Inspect product constructions, marking and workmanship.	1.No pollution on the surface of products. 2.Clear marking. 3.No crack.
6.Physical Dimensions	JESD22 Method JB-100	Verify physical dimensions to the applicable product detail specification.	Per product specification standard
7.Resistance to solvents	MIL-STD-202 Method 215	Immerse into solvent for 3±0.5 minutes & brush 10 times for their cycles.	1.No body change in apperaranace. 2.No marking blurred. 3.Inductance shall not change more than ±10%.
8.Vibration Test	MIL-STD-202 Method 204	1.Frequency and Amplitued : 10-2000-10 Hz, 1.5 mm. 2.Direction:X, Y, Z 3.Test duration:2 hours for each direction, 6 hours in total.	1.No mechanical and electrical damage. 2.Inductance shall not change more than ±10%.
9.Resistance To Soldering Heat Test	MIL-STD-202 Method 210	1.Highest temperature : 250±5℃ 2.Time (temp.≥ 217℃) : 60~150 Second. 3.IR reflow times : 3 times.	1.No mechanical and electrical damage. 2.Inductance shall not change more than ±10%.
10.Rated current	MIL-STD-202 Method 330	Apply rated current for 5 second.	1.No mechanical and electrical damage. 2.Inductance shall not change more than ±10%.
11.Temperature rise	MIL-PRF-27	Apply rated current for 10 minutes.	1.No mechanical and electrical damage. 2.Inductance shall not change more than ±10%.
12.Over load	MIL-PRF-27	Apply twice as rated current for 5 minutes. (It's not application to some special design)	1.No mechanical and electrical damage. 2.Inductance shall not change more than ±10%.
13.Solderability Test	J-STD-002	1.Baking in pre-testing : 155±5℃ / 16Hours±30 min. 2.Peak temperature : 240±5℃ 3.Time (temp.≥ 217℃) : 60~150 second. 4.IR reflow times : 1 times.	The terminal shall be at least 95% covered with fresh solder.
14.Electrical Characteriazation	User Spec.	1.Operating temperature : -40℃~125℃ 2.Room temperature : 25℃.	1.No mechanical and electrical damage. 2.Inductance shall not change more than ±10%.
15.Withstanding Voltage Test	MIL-STD-202 Method 201	1.DV:500V 2.Time:1minutes	1.During the test no breakdown. 2.The characteristic is normal after test.
16.Drop	JESD22-B111	Packaged & Drop down from 1m.In 1 angle 1ridges & 2 surfaces orientation.	1.No case deformation or change in appearance. 2.Inductance shall not change more than ±10%.
17.Terminal Strength Test	JIS-C-6429	1.Apply push force to samples mounted on PCB. 2.Force of 1.8 kg for 60±1 seconds.	After test, inductors shall be no mechanical damage.

AR-001C