


6	Spring	Stainless steel	/
5	Clamp	Copper alloy	Sn Plated
4	Cover	PA66	UL94V-0
3	Card hook	PA66-GF	UL94V-0
2	Housing	PA66	UL94V-0
1	Button	POM	UL94HB
ITEM	NAME OF PART	MATERIAL	NOTES

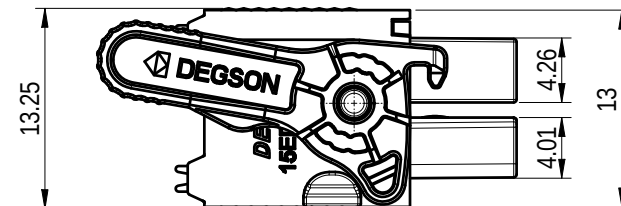

UL 标准/UL Standard	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/8	50/8	/
IEC 标准/IEC Standard			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	200/9.5	250/9.5	320/9.5
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	2.5	2.5	2.5
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	26~ 16/ 0.2~ 1.5		
剥线长度/Stripping length(mm)	10		
使用温度范围/Operating temperature(°C)	-40~ + 105		
符合 RoHS 环保要求/Conform to RoHS	Yes		

 DEGSON			MATERIAL:			SURFACE/COLOR:		
			MAT NO./REV: / 00			MAT STATUS: 新物料		
APPD:	兰春华	2024.06.04	NAME 15EDGKNHG-3.5-32P-1Y-74Z(H)					
CHKD:	龚耀志	2024.06.04						
DRFT:	吴明慧	2024.06.04	DRAWING NO. 200037278	TYPE CUSTOMER DRAWING	DRAWING STATUS work		SCALE 2:1	SHEET 1/1
	 A4							

00			吴明慧	2024.06.04
REV	ECN	DESCRIPTION	DRFT	DATE