


未注公差/General tolerances(mm)

6	Spring	Stainless steel	/
5	Clamp	Copper alloy	Sn Plated
4	Cover	PA66	UL94V-0
3	Card hook	PA66-GF	UL94V-0
2	Housing	PA66	UL94V-0
1	Button	POM	UL94HB
ITEM	NAME OF PART	MATERIAL	NOTES

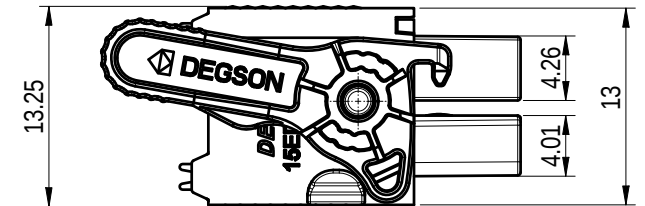

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/8	50/8	/
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	200/9.5	250/9.5	320/9.5
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	2.5	2.5	2.5
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm ²)	26~16 / 0.2~1.5		
剥线长度/Stripping length(mm)	10		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

 DEGSON		MATERIAL:		SURFACE/COLOR:		
		MAT NO./REV: / 00		MAT STATUS: work		
APPD: 龚耀志	2025.08.26	NAME 15EDGKNHG-3.5-32P-1Y-82Z(H)				
CHKD: 刘强	2025.08.26					
DFT: 张抗非	2025.08.26					
DRAWING NO.		TYPE		DRAWING STATUS	SCALE	SHEET
200385488		CUSTOMER DRAWING		work	2:1	1/1

00			张抗非	2025.08.26
REV	ECN	DESCRIPTION	DRFT	DATE