
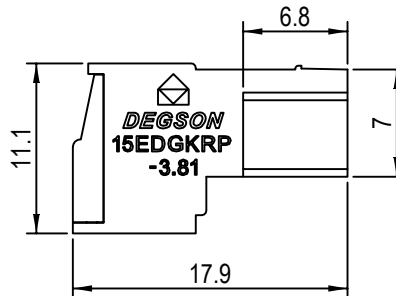
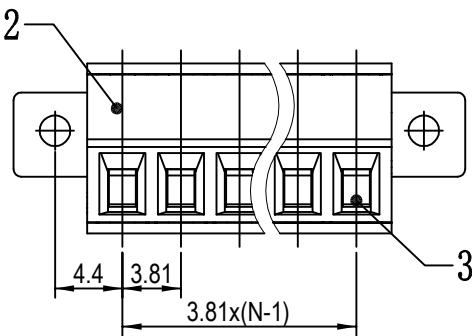

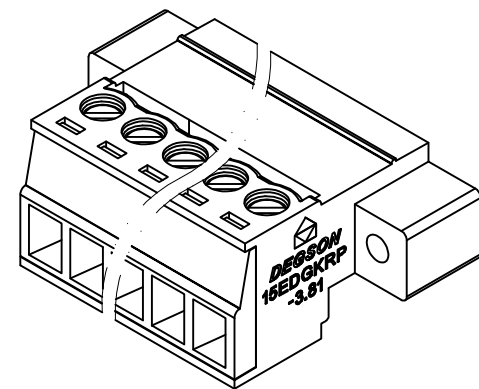
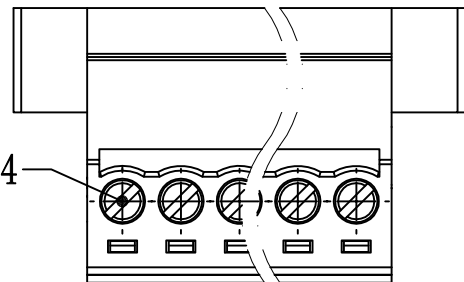
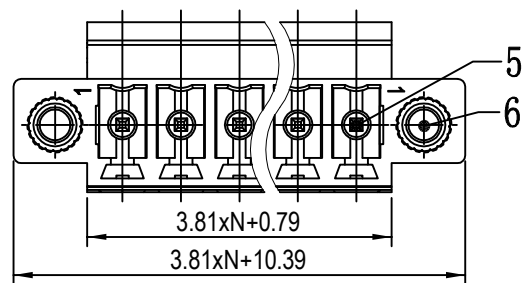


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除本手册外, 所有其他文件均受专利、实用新型或外观设计保护。未经授权, 复制或传播本手册内容, 将构成侵权并承担赔偿责任。本公司保留对涉及专利、实用新型或外观设计的所有权利。

公差/General tolerances (mm)													0.1/10 ±2'
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50



6	Screw cap	Copper alloy	M2.5	
5	Pin	Copper	Sn Plated	
4	Screw	Steel	M2/Zn Plated	
3	Cage	Copper alloy	M2/Ni Plated	
2	Cover	PA66	UL94V-0	
1	Housing	PA66	UL94V-0	
ITEM	NAME OF PART	MATERIAL	NOTES	
UL 标准/UL Standard:		B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)		300/8	/	/
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)		/	/	250/7
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		/	/	2.5
螺丝扭矩/Torque Tightening(N·m/Lb.in)		M2, 0.2/1.77		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)		28~16 / 1.5		
间距/Pitch(mm)/线数范围/Poles		3.81/N=02~16P		
剥线长度/Stripping length(mm)		6~7		
使用温度范围/Operating temperature(°C)		-40--+105		
符合RoHS环保要求/Conform to RoHS		Yes		

			MATERIAL:		SURFACE/COLOR:	
			MAT NO./REV: / 00		MAT STATUS: 批量	
APPD: 兰春华			NAME			
CHKD: 龚耀志			15EDGKRP-3.81-XXP-1Y-00A&Z (H)			
DRFT: 朱岳鹏			DRAWING NO.		DRAWING STATUS	
			200020011		已发布	
			TYPE		SCALE	
			CUSTOMER DRAWING		2:1	
					SHEET	
					1/1	

01		1x修正品名刺字	朱岳鹏	2024.02.28
REV	ECN	DESCRIPTION	DRFT	DATE

1

2

3

4

5

6