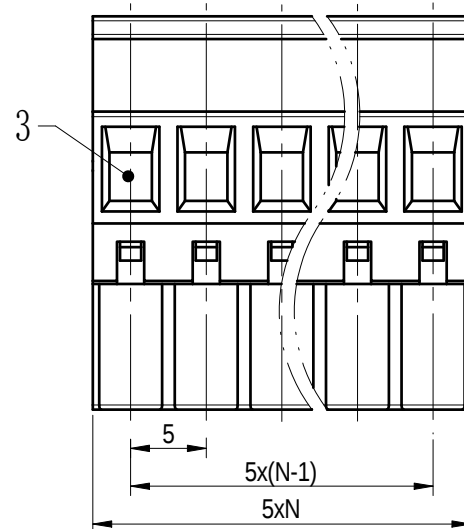
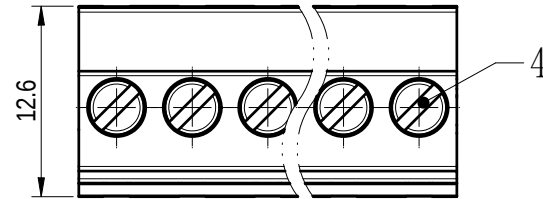


The A&Z(H) in the name means: A(H) and Z(H).

5	Clamp	Copper alloy	Sn Plated
4	Screw	Steel	M3/Zn Plated
3	Cage	Copper alloy	M3/Ni Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES			
UL 标准/UL Standard:		B	C	D		
额定电压/电流/Rated Voltage(V)/Current(A)		300/15	/	300/10		
IEC 标准/IEC Standard:						
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2	II/2		
额定电压/电流/Rated Voltage(V)/Current(A)		/	320/18	/		
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		/	4	/		
螺丝扭矩/Torque Tightening(N·m/Lb.in)		M3, 0.59/5.21				
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)		28~12 / 1.0~2.5				
间距/Pitch(mm)/线数范围/Poles		5.0/N=02~24P				
剥线长度/Stripping length(mm)		7				
使用温度范围/Operating temperature(°C)		-40~-+105				
符合RoHS环保要求/Conform to RoHS		Yes				

			MATERIAL:		SURFACE/COLOR:		
			MAT NO./REV: - / 00		MAT STATUS: 批量		
APPD:	兰春华	2022.12.15	NAME 2EDGKB-5.0-XXP-1Y-1000A&Z(H)				
CHKD:	龚耀志	2022.12.14					
DRFT:	朱岳鹏	2022.12.14					
 A4			DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
 (inch)			200020007	CUSTOMER DRAWING	已发布	2:1	1/1

00			朱岳鹏	2022.12.1
REV	ECN	DESCRIPTION	DRFT	DATE