
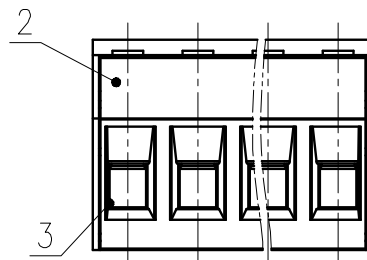


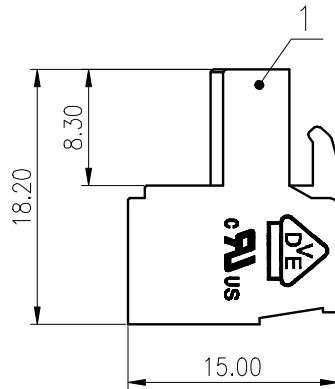
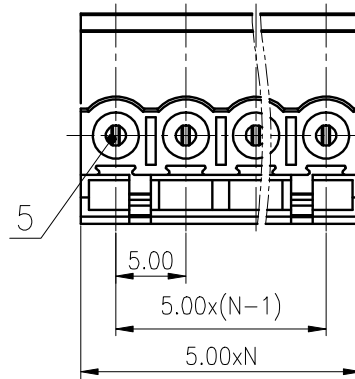


02P



未注公差/General tolerances(mm)

| 0<br>~3 | >3<br>~6 | >6<br>~10 | >10<br>~18 | >18<br>~30 | >30<br>~50 | >50<br>~80 | >80<br>~120 | >120<br>~180 | >180<br>~250 | >250<br>~315 | >315<br>~400 | >400<br>~500 | >500  | 0.1/10<br>±2' |
|---------|----------|-----------|------------|------------|------------|------------|-------------|--------------|--------------|--------------|--------------|--------------|-------|---------------|
| ±0.12   | ±0.18    | ±0.22     | ±0.26      | ±0.31      | ±0.37      | ±0.57      | ±0.80       | ±0.93        | ±1.05        | ±1.15        | ±1.60        | ±2.20        | ±2.50 |               |

|   |         |              |              |
|---|---------|--------------|--------------|
| 5 | Clamp   | Copper Alloy | Sn Plated    |
| 4 | Screw   | Steel        | M3/Zn Plated |
| 3 | Cage    | Copper Alloy | M3/Ni Plated |
| 2 | Cover   | PA66         | UL94V-0      |
| 1 | Housing | PA66         | UL94V-0      |

| ITEM | NAME OF PART | MATERIAL | NOTES |
|------|--------------|----------|-------|
|------|--------------|----------|-------|

UL 标准/UL Standard:

额定电压/电压/Rated Voltage(V)/Current(A)

IEC 标准/IEC Standard:

过压类别/Overvoltage Category/污染等

级/Pollution Degree

额定电压/电压/Rated Voltage(V)/Current(A)

额定脉冲电压(KV)/Rate Impulse Voltage(KV)

螺栓扭矩/Torque Tightening(N·m/Lb.in)

线径范围(硬线和软线)/Wire Range(rigid and

flexible)(mm<sup>2</sup>/AWG)

间距/Pitch(mm)/线数范围/Poles

剥线长度/Stripping length(mm)

使用温度范围/Operating temperature(°C)

符合RoHS环保要求/Conform to RoHS

MATERIAL: / SURFACE: /

MAT NO.: /

STATUS: /

APPD: LanChH 2020.06.23

CHKD: YuJZh 2020.06.23

DRFT: BaYH 2020.06.23

NAME: 2EDGKF-5.0-XXP-1Y-1000A(H)

DRAWING NO.: 10002080

REV: TO

TYPE: CUSTOMER DRAWING

SCALE: 2:1

SHEET 1/1

| REV | ECN | DESCRIPTION | DRFT | DATE |
|-----|-----|-------------|------|------|
|-----|-----|-------------|------|------|