

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized. Violation is prohibited. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、外观设计、发明专利、软件著作权、商标、印刷、其他文件的所有权外，本公司保留所有权利。 未经授权，不得复制或传播。

FOR-1755 Rev.1.8

2

3

4






5

6

未注公差/General tolerances (mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	>500	±2°
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

02P: Clasp on the left from this view

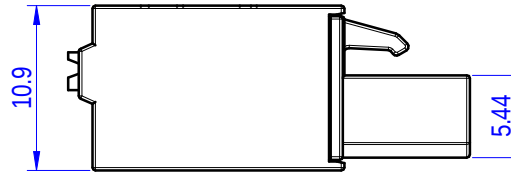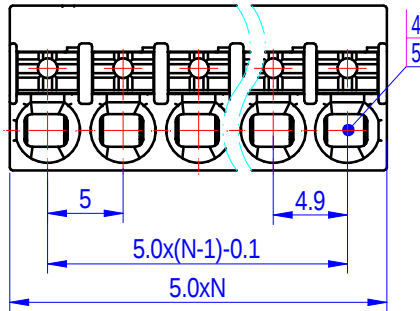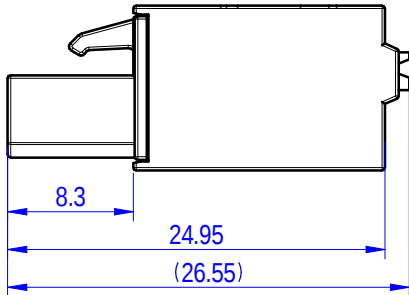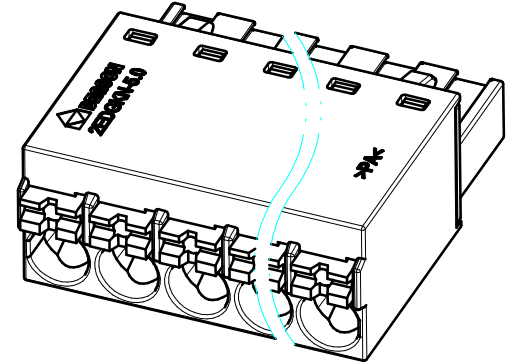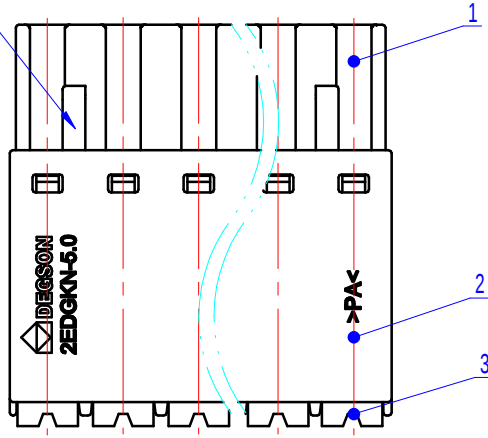

5	Clamp	Copper alloy	Sn Plated
4	Spring	Stainless steel	/
3	Button	PA66+GF	UL94V-0
2	Housing	PA66	UL94V-0
1	Cover	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B	C
额定电压/电流/Rated Voltage(V)/Current(A)		300V/10	/
IEC 标准/IEC Standard:		D	
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2
额定电压/电流/Rated Voltage(V)/Current(A)		320/12	400/12
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		4	4
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)		24~16 / 0.2~2.5	
间距/Pitch(mm)/线数范围/Poles		5.0/N=02~24P	
剥线长度/Stripping length(mm)		11	
使用温度范围/Operating temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	



MATERIAL:	SURFACE/COLOR: PANTONE 556C		
MAT NO./REV:	/		
NAME	2EDGKN-5.0-XXP-1Y-00Z (H)		
APPD:	CHKD:	DRFT:	
DRAWING NO.	TYPE	DRAWING STATUS	SCALE
200031170	CUSTOMER DRAWING	work	2:1
			SHEET
			1/1

00	ECN	DESCRIPTION	DRFT	DATE
REV	ECN	DESCRIPTION	DRFT	DATE

1

2

3

4

5

6