
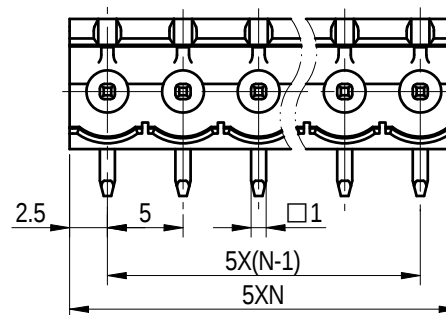

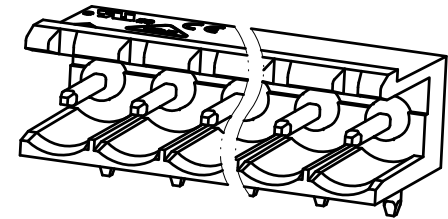


Technical drawing of a plate with five holes. The first hole is 2.5 units from the left edge. The distance between the first and last hole is $5X(N-1)$. The last hole is 2.1 units from the right edge. The hole diameter is $\varnothing 1.4$. A break symbol is shown between the second and fourth holes.

未注公差/General tolerances(mm)														 0.1/10  ±2°
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

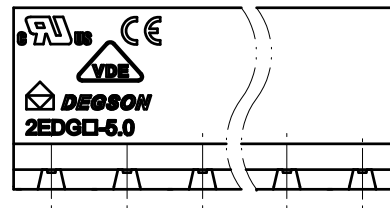

The A&Z(H) in the name means: A(H) and Z(H).

2	Pin	Copper	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/15	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	320/20	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	/	4	/
间距/Pitch(mm)/线数范围/Poles	5.0/N=02~24P		
使用温度范围/Operating temperature(°C)	-40~-+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number: PANTONE / RAL	/		

		MATERIAL:		SURFACE/COLOR:	
APPD: 兰春华		2022.08.22		NAME	
CHKD: 龚耀志		2022.08.22		2EDGR-5.0-XXP-1Y-100A&Z(H)	
DRFT: 方哲盛		2022.08.19		DRAWING NO.	
		A4		200019295	
		TYPE		DRAWING STATUS	
1 inch		CUSTOMER DRAWING		已发布	
200019295		SCALE		SHEET	
2:1		1/1			

00			方哲盛	2022.08.1
REV	ECN	DESCRIPTION	DRFT	DATE