
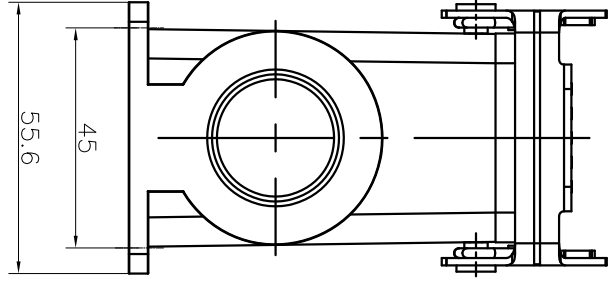
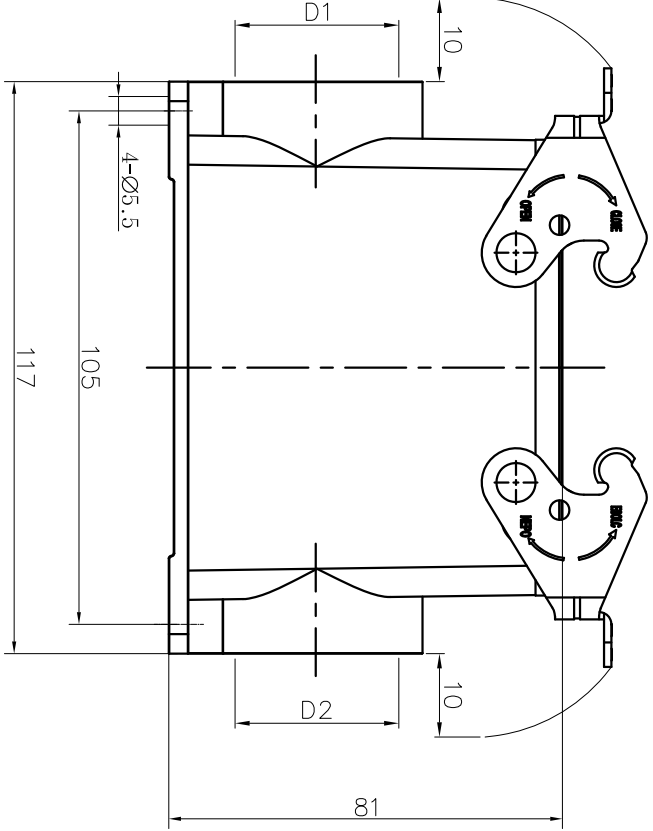


TYPE	Thread		Selection
	D1	D2	
D16B-SFH-2L-M25	M25	—	
D16B-SFH-2L-2M25	M25	M25	
D16B-SFH-2L-M32	M32	—	
D16B-SFH-2L-2M32	M32	M32	
D16B-SFH-2L-PG21	PG21	—	
D16B-SFH-2L-2PG21	PG21	PG21	
D16B-SFH-2L-PG29	PG29	—	
D16B-SFH-2L-2PG29	PG29	PG29	

REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

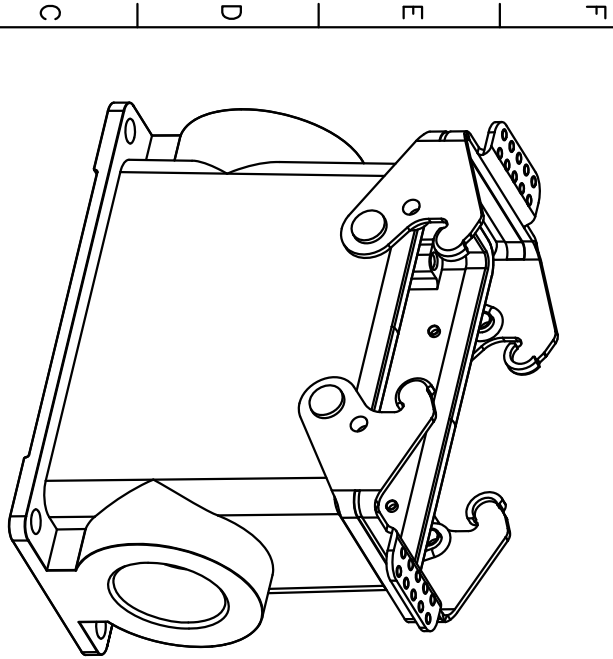

Housings Feature

- 01.Material: aluminium die-cast
- 02.Surface: Powder-coated
- 03.Color:grey(RAL 7037)
- 04.Material:Metal(Lever)
- 05.Sealing:NBR
- 06.Limiting temperatures:-40°C ~ +125°C
- 07.Flammability acc to UL94:V0
- 08.Degree of protection acc.to EN60529 for coupled connector :IP65
- 09.Rohs compliance
- 10.General tolerances:DIN ISO 2768-v

DETACHED LISTS			
PART NO.:	/		
APPD:	Huang JS 2019.05.10	 NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司	
CHKD:	Yang SH 2019.05.10		
DRFT:	Lu JK 2019.05.10		
 THIRD ANGLE PROJECTION			
		NAME:	D16B-SFH-2L-M/PG
TITLE: CUSTOMER DRAWING		REV	DO
DRAWING NO.:		SHEET	1/1
MM INCH		DO NOT SCALE DRAWING	SCALE 1:1.5