


REVISION RECORD					
REV	ECN	DESCRIPTION	DRFT	DATE	

TYPE	Thread		Selection
	D1	D2	
D24B-SFH-2L-M32	M32	—	
D24B-SFH-2L-2M32	M32	M32	
D24B-SFH-2L-PG21	PG21	—	
D24B-SFH-2L-2PG21	PG21	PG21	
D24B-SFH-2L-PG29	PG29	—	
D24B-SFH-2L-2PG29	PG29	PG29	

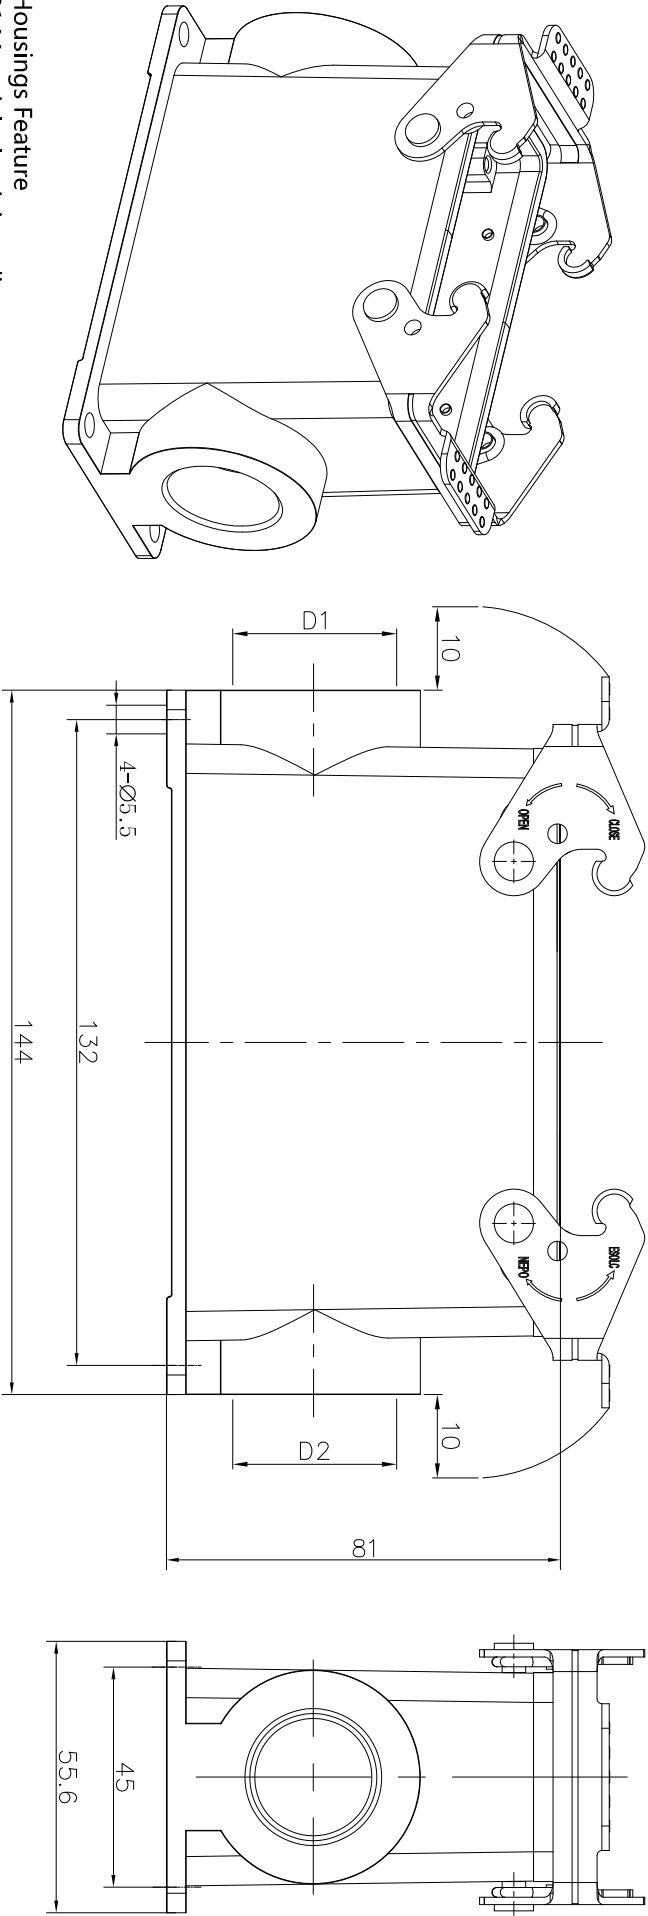

- Housings Feature
- 01.Material: aluminium die-cast
 - 02.Surface: Powder-coated
 - 03.Color: grey(RAL 7037)
 - 04.Material: Metal(Lever)
 - 05.Sealing: NBR
 - 06.Limiting temperatures: -40°C ~ +125°C
 - 07.Flammability acc to UL94: V0
 - 08.Degree of protection acc.to EN60529 for coupled connector :IP65
 - 09.Rohs compliance
 - 10.General tolerances: DIN ISO 2768-v

DETACHED LISTS									
PART NO.:		/		 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD					
APPD: Huang JS 2019.05.10		NAME:							
CHKD: Yang SH 2019.05.10		D24B-SFH-2L-M/PG							
DRFT: Lu JK 2019.05.10		TITLE: CUSTOMER DRAWING				REV		DO	
 THIRD ANGLE PROJECTION		DRAWING NO.:		SHEET 1/1					
		 MM (INCH)		DO NOT SCALE DRAWING SCALE 1:1.5					