

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE

Technical characteristics:

Specifications

DIN EN 60 664-1

DIN EN 61 984

Inserts

01.Number of contacts :10+PE

02.Rated Current :16A

03.Rated Voltage :500V

04.Pollution degree :3

05.Rated impulse voltage :6kv

06. Insulation resistance : $\geq 10^{10} \Omega$

07. Material:Polycarbonate

08.Rated voltage acc.to UL/CSA:600V

09.Limiting temperatures : $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$

10.Flammability acc.to UL94:V0

11.Mechanical working life

(mating cycles) : ≥ 500

Contacts

01.Material:Copper alloy

02.Surface:hard-silver plated




03.Contact resistance : $\leq 3\text{m}\Omega$



04.Terminal :Cage-clamp

05.Wire gauge :0.2-2.5mm² (AWG 26-14)

06.Stripping length :7-9mm

07.Rohs Compliance

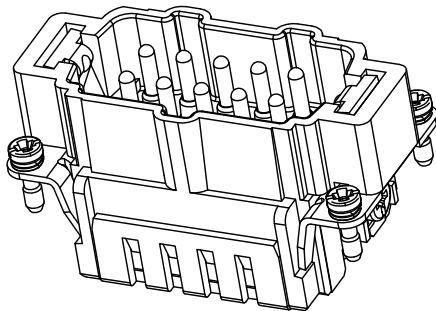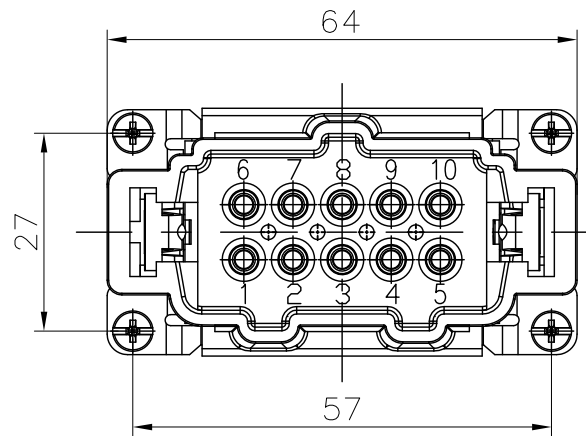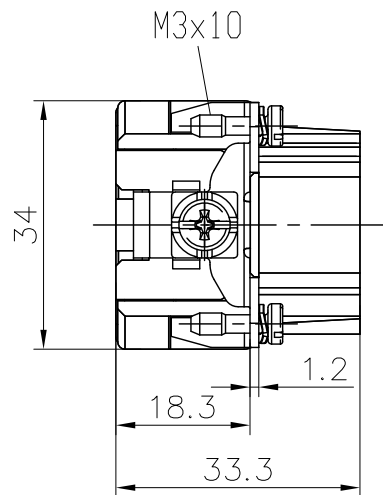

DETACHED LISTS	PART NO.: /	 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	NAME:			
	CHKD:	DE-010-MS			
	DRFT: Mr.Yang 2016.08.08	TITLE: CUSTOMER DRAWING		REV	DO
	 THIRD ANGLE PROJECTION		DRAWING NO.: /		SHEET 1/1
		 DO NOT SCALE DRAWING		SCALE	1:1