

Technical characteristics:

Specifications

DIN EN 60 664-1
DIN EN 61 984



Inserts

- 01. Number of contacts :16+PE
- 02. Rated Current :16A
- 03. Rated Voltage :500V
- 04. Pollution degree :3
- 05. Rated impulse voltage :6kv
- 06. Insulation resistance :≥10¹⁰ Ω
- 07. Material:Polycarbonate
- 08. Rated voltage acc. to UL/CSA:600V
- 09. Limiting temperatures : -40℃~+125℃
- 10. Flammability acc. to UL94:V0
- 11. Mechanical working life (mating cycles) :≥500

contacts

- 01. Material:Copper alloy
- 02. Surface:hard-silver plated
- 03. Terminal :Push-in terminal
- 04. Wire gauge :0.5-2.5mm² (AWG 20-14)
- 05. Stripping length :8-10mm

Note:Use only flexible wires with cold heads

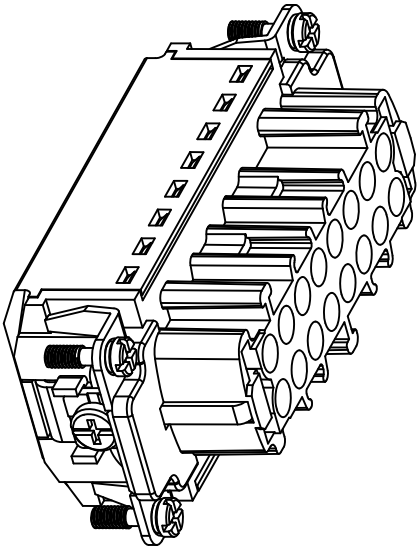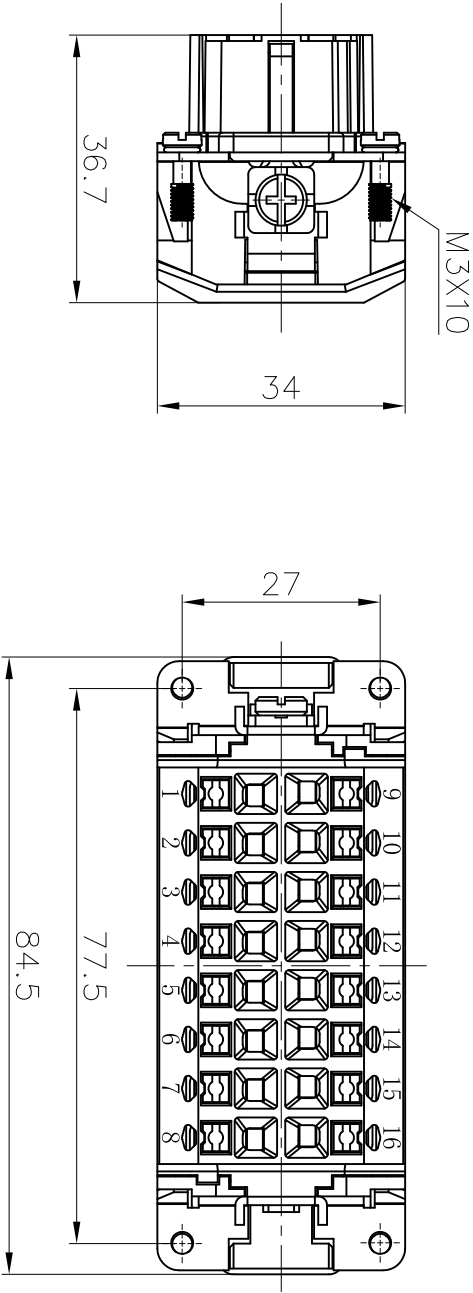

MATERIAL:	SURFACE:
-----------	----------

MAT NO.:	NINGBO DEGSON ELECTRICAL CO., LTD
----------	-----------------------------------

STATUS:	NAME:
---------	-------

APPD: Zhou X 2021.07.13	DE-016-FP
-------------------------	-----------

CHKD: Yang SH 2021.07.13	
--------------------------	--

DRAFT:Chen HK 2021.07.13	DRAWING NO.:
--------------------------	--------------

SIZE:A4	TYPE: CUSTOMER DRAWING	SCALE: 1:1	REV	D0
---------	------------------------	------------	-----	----