


Diagram illustrating a 3-phase 4-wire system configuration. The system includes a transformer labeled 0.6-2.5 kVOL and a load labeled 450V 24A. The diagram shows the transformer connected to a 3-phase 4-wire system, which is then connected to the load.

Diagram of a power supply unit with a footprint of 150mm x 125mm. The unit is labeled with a maximum power of 1000W, a voltage range of 0.5-2.5mm SOL, and a current rating of 450V 24A.

Diagram of the identification label (3) showing a triangle symbol, the text "DEGSON DG228", and a height dimension of 9.6.

Technical drawing of a multi-hole plate. The drawing shows a rectangular plate with a series of circular holes. The first hole is labeled '1'. The distance between the first and second hole is 3.4. The distance between the second and third hole is 3.5. The distance between the third and fourth hole is $3.5 \times (N-1)$. The drawing is a cross-section view, indicated by a break line.

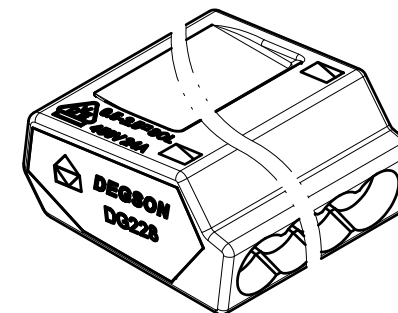

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	600/15	/	/
VDE标准/VDE Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	450/24	/
工频耐压/Withstanding Voltage(V/1Min)	AC2500		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	22~14 / 0.5~2.5 Sol		
间距/Pitch(mm)/线数范围/Poles	3.5/N=02~05P		
剥线长度/Stripping length(mm)	11~13		
使用温度范围/Operating temperature(°C)	-40~+85		
符合RoHS 环保要求/Conform to RoHS	Yes		

4	Housing	PC	UL94V-2
3	Cover	PC	UL94V-2
2	Spring	Stainless steel	Sn Plated
1	Clamp	Steel	Sn Plated
ITEM	NAME OF PART	MATERIAL	NOTES

			MATERIAL:		SURFACE/COLOR:		
			MAT NO./REV: / 00		MAT STATUS: 批量		
APPD:	兰春华	2022.09.06	NAME DG228-3.5-XXP-1Y-00Z (H)				
CHKD:	陈招	2022.09.06					
DRFT:	柳学龙	2022.09.06					
			DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
 A4 			200025246	CUSTOMER DRAWING	已发布	2:1	1/1

00			柳学龙	2022.09.06
REV	ECN	DESCRIPTION	DRFT	DATE