

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除专利及外观设计外, 其他权利均受法律保护。未经许可, 不得复制或传播。本公司保留所有权利。侵权必究。

FOR-1755 Rev.2.1

2







3

4


5

6

PCB LAYOUT

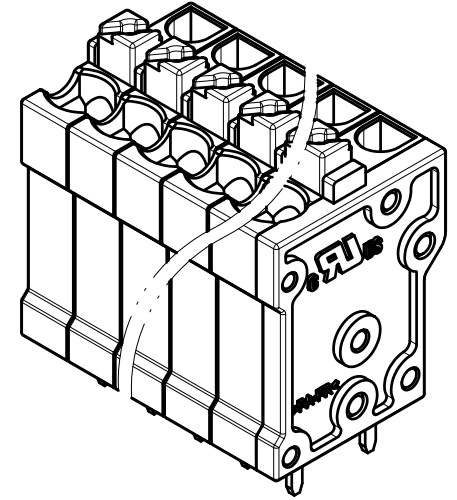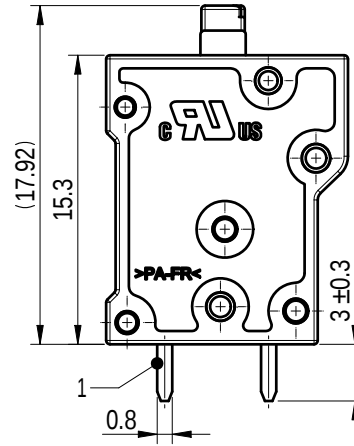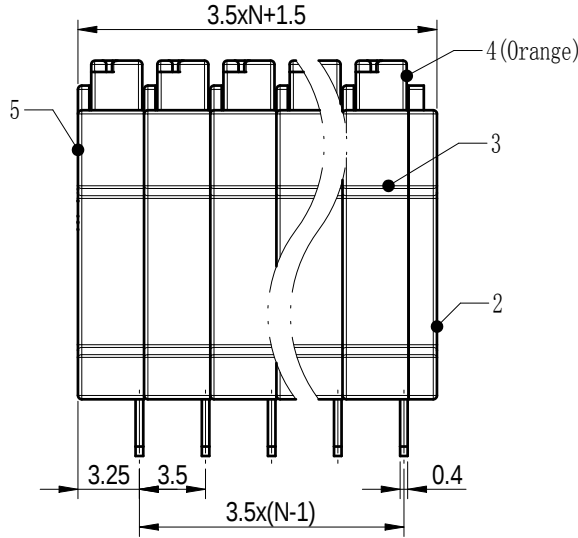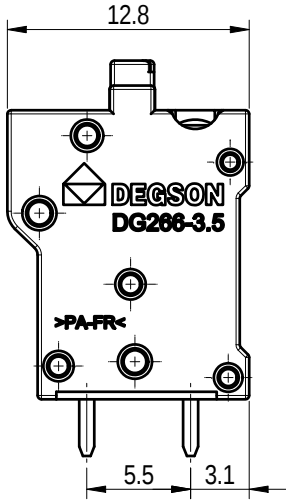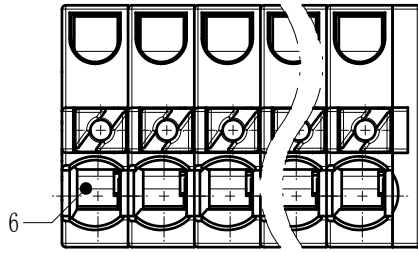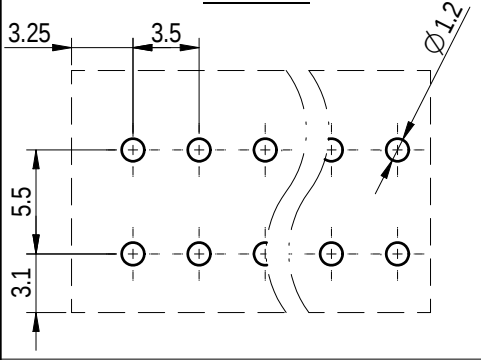

6	Spring	Stainless Steel	/
5	Side_Housing	PA66	UL94V-0
4	Button	PA66-GF	UL94V-0
3	Mid_Housing	PA66	UL94V-0
2	Cover	PA66	UL94V-0
1	Pin Header	Copper Alloy	Sn Plated
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B	C
额定电压/电流/Rated Voltage(V)/Current(A)		300/10	50/10
IEC 标准/IEC Standard:		D	
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2
额定电压/电流/Rated Voltage(V)/Current(A)		160/10	160/10
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		2.5	2.5
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)		28~16/ 0.2~1.5	
间距/Pitch(mm)/线数范围/Poles		3.5/N=02~24P	
剥线长度/Stripping length(mm)		10~12	
使用温度范围/Operating temperature(°C)		-40~+105	

			MATERIAL:		SURFACE/COLOR:		
			MAT NO./REV: / 01.01		MAT STATUS: 批量		
APPD: 兰春华	2024.04.28		NAME				
CHKD: 陈招	2024.04.28		DG266-3.5-XXP-1Y-00Z (H)				
DRFT: 陈招	2024.04.28		DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
		200041412	CUSTOMER DRAWING		已发布	2:1	1/1

01		1x增加UL刻字	陈招	2024.04.28
REV	ECN	DESCRIPTION	DRFT	DATE

1

2

3

4

5

6