

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、外观设计、发明专利等权利外，本公司保留对涉及发明、实用新型和外观设计的所有权利。

FOR-1755 Rev.1.6

2

3





4

5

6

未注公差/General tolerances (mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500		±2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

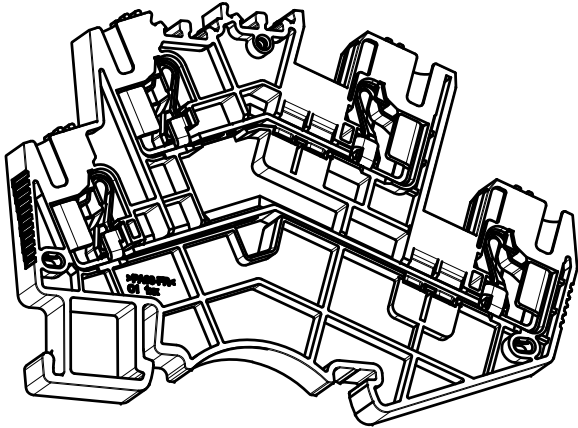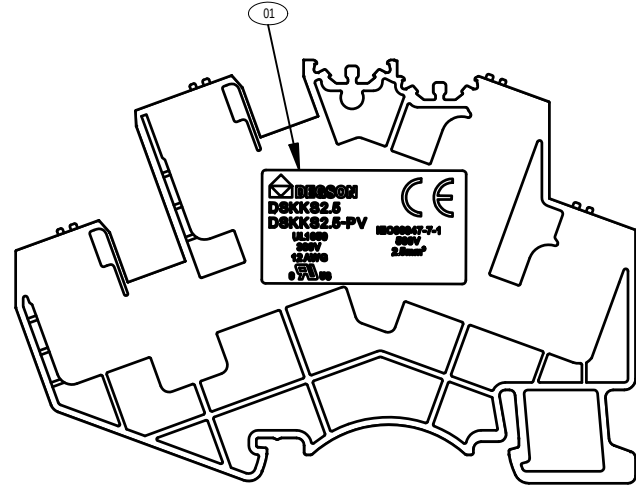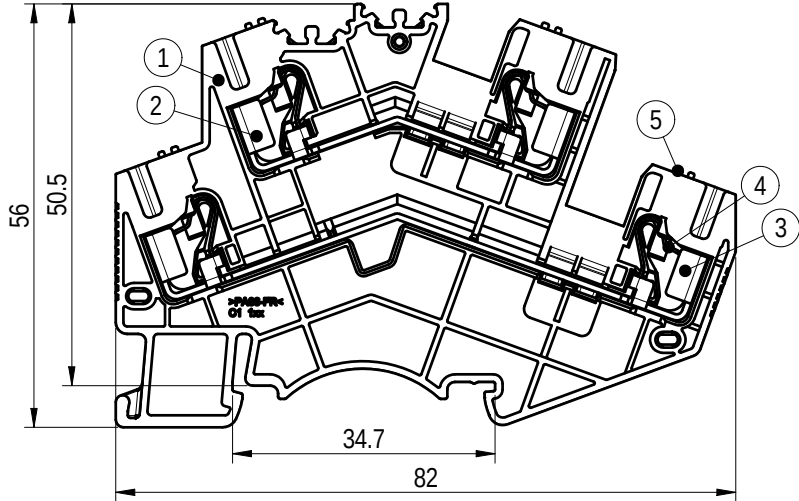

5	Button	PA66+GF%	UL94V-0
4	Spring	Stainless steel	/
3	Current_carrier2	Copper	Sn Plated
2	Current_carrier1	Copper	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300V/20	300/20	/
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	500/24	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	6	/	/
线径范围(硬线和软线)/Wire Range(rigid and flexible) (AWG/mm²)	26~12/0.2~2.5&4 (SOL)		
间距/Pitch(mm)/线数范围/Poles	5.2N=01P		
剥线长度/Stripping length(mm)	10~12		
使用温度范围/Operating temperature(°C)	-40~+105		
符合 RoHS 环保要求/Conform to RoHS	Yes		

			MATERIAL:		SURFACE/COLOR:			
			MAT NO./REV: 11040000898-1 / 00.03		MAT STATUS: 批量			
APPD: 李根芳			2024.07.03		NAME DSKKS2.5-01P-11-00Z (H)			
CHKD: 马恩升			2024.07.02					
DRFT: 宗明忠			2024.07.02					
DRAWING NO.			TYPE		DRAWING STATUS		SCALE	SHEET
200062268			CUSTOMER DRAWING		已发布		1:1	1/1
 A4			 (inch)					

01		Certification engraving update	宗明忠	2024.07.02
REV	ECN	DESCRIPTION	DRFT	DATE