

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除本图外，其他任何形式之复制、传播、引用、分发等均为侵权行为，本公司保留追究法律责任之权利。

FOR-1755 Rev.2.0



2

3

4

5

6

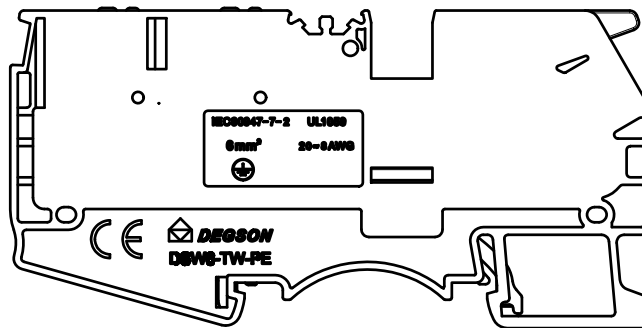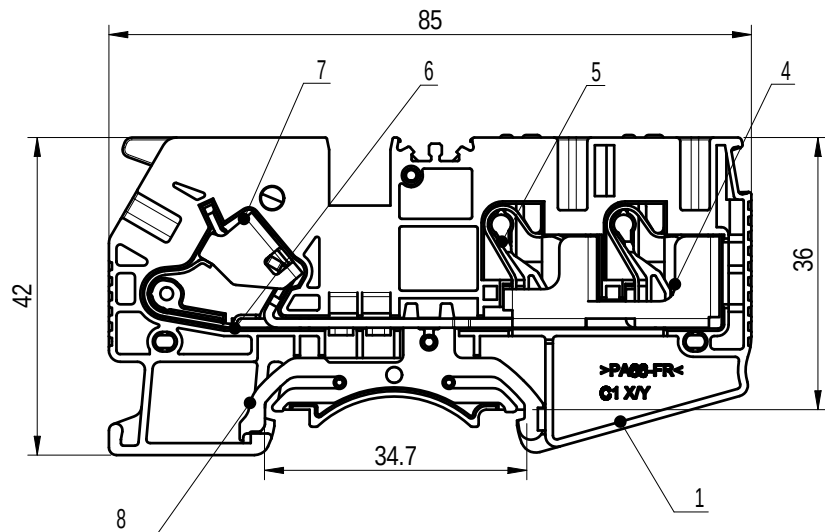

未注公差/General tolerances (mm)												
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20


0.1/10
±2'

8	PE	Copper alloy	Sn Plated
7	Slider	Stainless steel	/
6	Spring 2	Stainless steel	/
5	Spring 1	Stainless steel	/
4	Current carrier	Copper	Sn Plated
3	Lever	PA66+GF	UL94V-0
2	button	PA66+GF	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	/
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8	/	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	20~8/0.5~6&10(sol)		
间距/Pitch(mm)/线数范围/Poles	8.2/01P		
剥线长度/Stripping length(mm)	10~12		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

		MATERIAL:	SURFACE/COLOR:	
MAT NO./REV: 11040001157-1 / 00		MAT STATUS: work		
APPD: 李根芳	2023.09.27	NAME		
CHKD: 马恩升	2023.09.27	DSW6-TW-PE-01P-1C-00Z (H)		
DRFT: 王林祥	2023.09.27	DRAWING NO.	TYPE	DRAWING STATUS
		200254323	CUSTOMER DRAWING	work
			SCALE	SHEET
			1:1	1/1

00	ECN	/	王林祥	2023.09.27
REV	ECN	DESCRIPTION	DRFT	DATE



1

2

3

4

5

6