
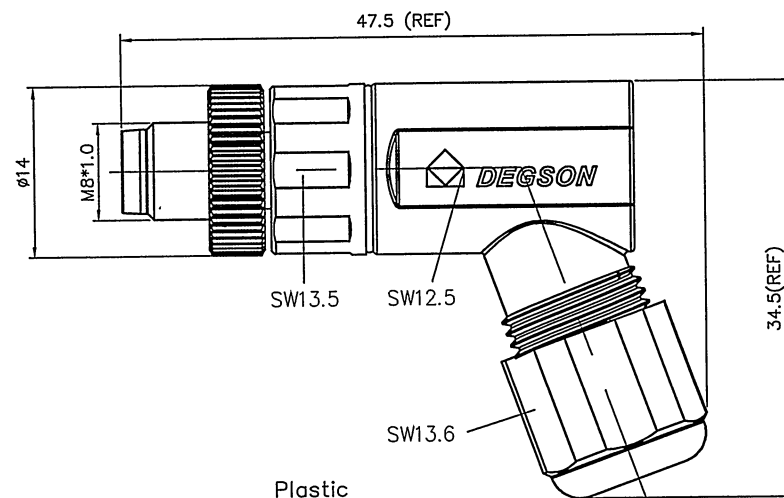


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES:


- 1.Rated voltage/current : 3pin:60V / 3A
4pin:60V / 3A
- 2.Withstanding voltage : 3,4pin:AC850V/1Min
- 3.Levels of protection:IP67
- 4.Wire range : 3pin: 24~22AWG/0.25~0.34mm²
4pin: 24~22AWG/0.25~0.34mm²
- 5.Cable range : 4~6mm
- 6.Wire connection mode:screw
- 7.Operating temperature:-40°C~+85°C
- 8.RoHS Compliance
- 9.Tolerance :±0.5mm

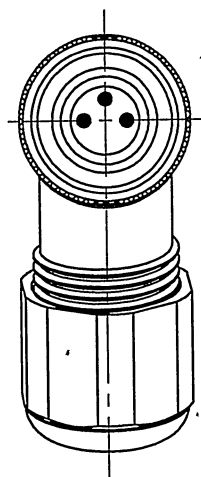


PB-M8A-XXP-MM-SR7001-00A(H)

Pin number: 03,04,

3pin A Coding

Pin Assignment
Front View

4pin A Coding

Pin Assignment
Front View

DETACHED LISTS	PART NO.: PBM8AXPMMSR700100AH	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD: ZX 2019.05.20	NAME: PB-M8A-XXP-MM-SR7001-00A(H)		
	CHKD: 20 2019.5.20	TITLE: CUSTOMER DRAWING		
	DRFT: SQ 2019.05.17	REV: D0-1		
THIRD ANGLE PROJECTION		DRAWING NO.: XXXXXXXX-XX-CXX	SHEET: 1/1	SCALE: 1:1
		MM (INCH)	DO NOT SCALE DRAWING	