

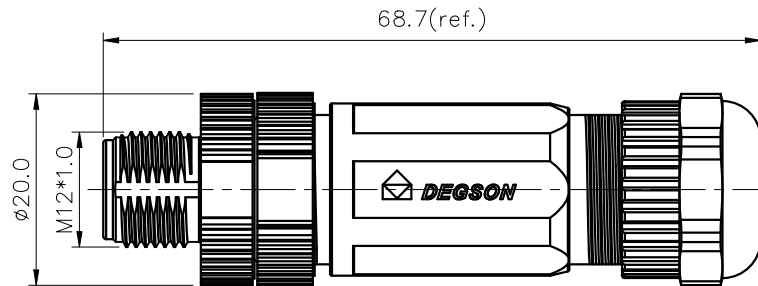


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------



metal

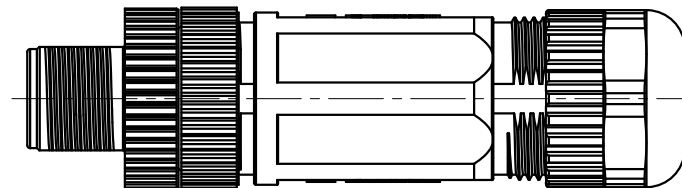

NOTES:

- Rated voltage/current : 3pin A: 250V / 4A
4pin A: 250V / 4A
5pin A: 60V / 4A
6pin A: 30V / 2A
8pin A: 30V / 2A
5pin B: 60V / 4A
4pin D: 250V / 4A
- Withstanding voltage : 3,4pin A: AC1400V/1Min
5pin A: AC1000V/1Min
6,8pin A: AC650V/1Min
5pin B: AC1000V/1Min
4pin D: AC1400V/1Min

3.Levels of protection: IP67

4.Wire range :

- 3pin A: 24~22AWG/0.25~0.34mm²
- 4pin A: 24~22AWG/0.25~0.34mm²
- 5pin A: 24~22AWG/0.25~0.34mm²
- 6pin A: 24~22AWG/0.25~0.34mm²
- 8pin A: 24~22AWG/0.25~0.34mm²
- 5pin B: 24~22AWG/0.25~0.34mm²
- 4pin D: 24~22AWG/0.25~0.34mm²

5.Cable OD: 4.5~7.5mm

6.Wire connection mode: screw

7.Working temperature: -40°C~+105°C

8.RoHS Compliance

9.Tolerance : ±0.5mm

PBSH-M12X-XXP-MM-SL700X-00A(H)

Coding: A,B,D



001: Cable OD: 4.5~6.0mm

002: Cable OD: 6.0~7.5mm

Pin number: 03,04,05,
06,08

5pin B Coding

4pin D Coding



Pin Assignments
Front View

Pin Assignments
Front View






3pin A Coding

4pin A Coding

5pin A Coding

6pin A Coding

8pin A Coding




Pin Assignments
Front View

Pin Assignments
Front View

Pin Assignments
Front View

Pin Assignments
Front View

Pin Assignments
Front View

DETACHED LISTS	PART NO.: PBSHM12XXXPMMSL700X00AH	NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD: David 2024.07.19	NAME: PBSH-M12X-XXP-MM-SL700X-00A(H)		
	CHKD: David 2024.07.19			
	DRFT: YKW 2024.07.19			
 THIRD ANGLE PROJECTION		TITLE: CUSTOMER DRAWING		REV D0-2
		DRAWING NO.: XXXXXXXX-XX-CXX	SHEET 1/1	SCALE 1:1
		DO NOT SCALE DRAWING	SCALE	1:1