


Dimensional tolerance(mm)					Length tolerance(mm)					∅
0	>30	>60	>100	>150	0	5000	10000	>30000		0.1/0.10
30	60	100	150	5000	10000	30000	>30000		≥	42°
±0.25	±0.35	±0.55	±0.80	±1.10	±.55	±105	±205	±305		

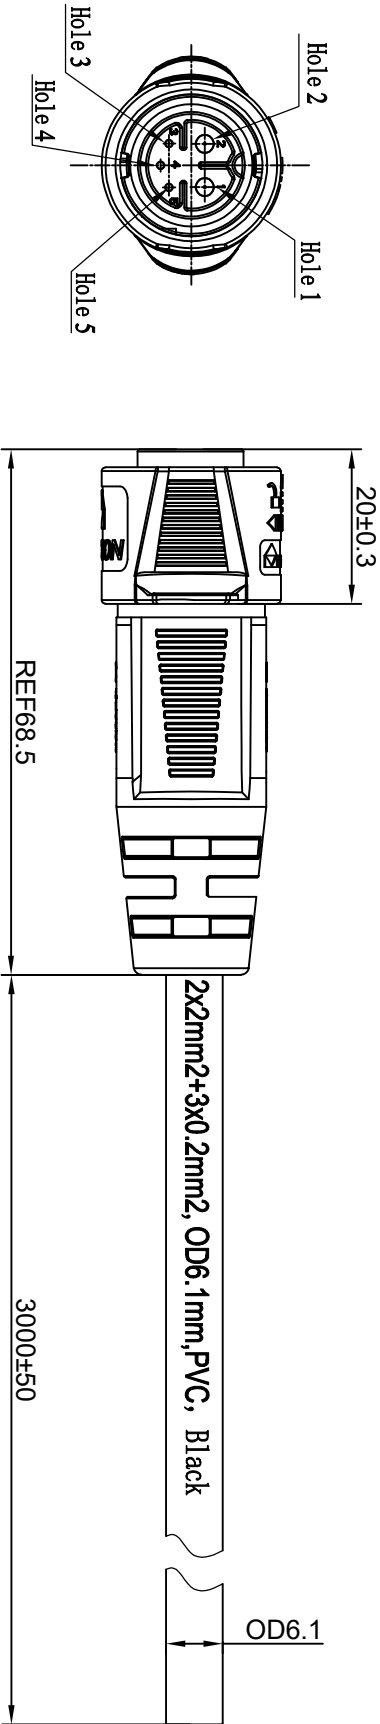

5	yellow	0.2mm ²
4	blue	0.2mm ²
3	green	0.2mm ²
2	red	2mm ²
1	black	2mm ²
Hole number Wire color Wire specifications		
Wiring table		

技术要求/Technical requirements:	
额定电压/Voltage Rated Voltage/Current	110V /20A
绝缘电阻/Insulate Resistance	≥100MΩ
耐压/Withstanding Voltage	500V AC
防护等级/Ingress Protection	IP67
插拔寿命/Insertion/Pullout Times	3000 Times
使用温度范围/Operating temperature(°C)	-40℃~+105℃
接线方式/Terminal	Soldering
导线外径范围/Wire range(mm)	06, 1±0.3

图纸版本		EON	变更描述		设计人	设计日期	APPD:		MATERIAL/材质		SURFACE: 表面处理	
REV	EON	DESCRIPTION	DRFT	DATE			CHKD:		MAT NO./REV: 物料编码 / 版本		MAT STATUS: 物料状态	
							NAME		PM-EBBM-2003-M-L3000-01A(H)			
④		▽	why	2024.11.25	DRAWING NO. 图号		TYPE 图纸类型		DRAWING STATUS 图纸状态		SCALE 1:1	
			A4	2024.11.25							SHEET 1/1	