

未注公差/General tolerances(mm)





0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	0.1/10 ±2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

A

B

C

D

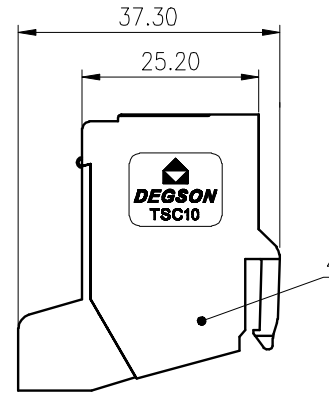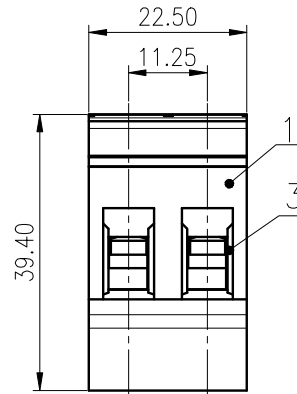

4	Pin Header	Copper alloy	Zn plated
3	Cage	Copper alloy	M4/Ni Plated
2	Screw	Steel	M4/Zn plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B	C
额定电压/电流/Rated Voltage(V)/Current(A)		600/65	600/65
IEC 标准/IEC Standard:		D	
过压类别/Overvoltage Category/污染等		III/2	
级/Pollution Degree			
额定电压/电流/Rated Voltage(V)/Current(A)		1000/57	
工频耐压/Withstanding voltage		AC3500V/1Min	
螺丝扭矩/Torque Tightening(N·m/Lb.in)		M4, 1.2/10.53	
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)		0.2~10/24~6	
间距/Pitch(mm)/线数范围/Poles		11.25/02P	
剥线长度/Stripping length(mm)		10~12	
使用温度范围/Operating temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	
标准颜色编号/Standard color number: RAL		RAL 2000	

MATERIAL: /	SURFACE: /		
MAT NO.: /	 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
STATUS: /			
APPD:			
CHKD:	NAME: TSC10-02P-15-01A(H)		
DRFT: CenMZ 2020.05.19	DRAWING NO.: TSC10-C02		REV TO
REV	ECN	DESCRIPTION	DRFT DATE
SIZE: A4	mm (inch)	TYPE: CUSTOMER DRAWING	SCALE: 1:1 SHEET 1/1