

1

2

3

4

5

6

7

8

A

B

C

D

E

F

G

H

A

B

C




D

E

F

G

H

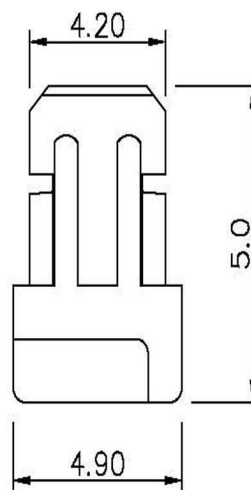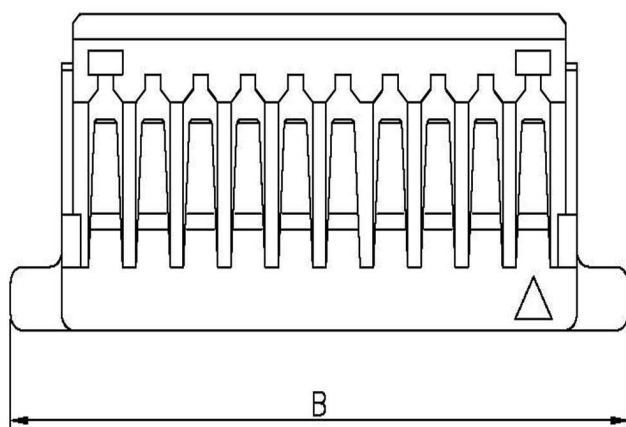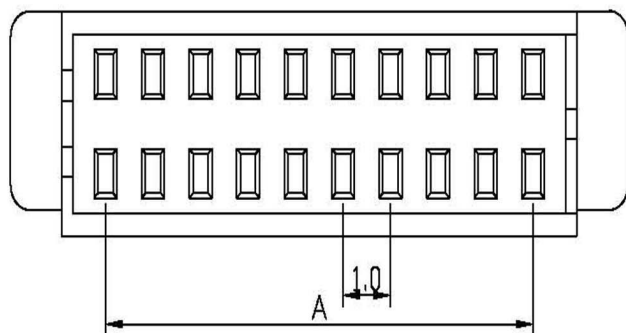

SPECIFICATIONS

Electrical

Current Rating: 1A AC, DC

Voltage Rating: 50V AC/ max.

Operating Temp.: -25°C ~ +85°C

Insulation Resistance: 500MΩ/ min.

Dielectric Withstanding Voltage: 500V AC/ min.

Contact Resistance: 20MΩ/ max.

Material

Material: PBT, UL94V-0

Poles	Dimension mm		
	A	B	
20	9.00	13.00	2X10P
30	14.00	18.00	2X15P
40	19.00	23.00	2X20P
50	24.00	28.00	2X25P

RoHS
Compliant

Gold Star Connectors Co., Ltd.

APPD.
核准
BETTY
DWG.
製圖
BETTY
DATE 制表日
2009/06/10

SCALE
比例
參考
UNIT
單位
M M
PAGE
張數
1 OF 1

TOLERANCE
容許公差
X.XX ± 0.2
X.X ± 0.3
SIZE
紙張尺寸
A 4
REV.
版次
A

PART NAME 品名
1mm DUAL ROW HOUSING
WITH PROTRUSIONS

PART NO.
料號
JNCHD100-xx