

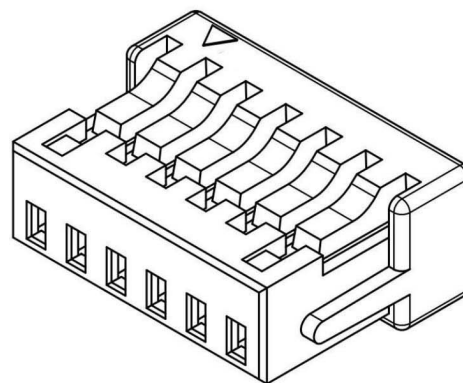
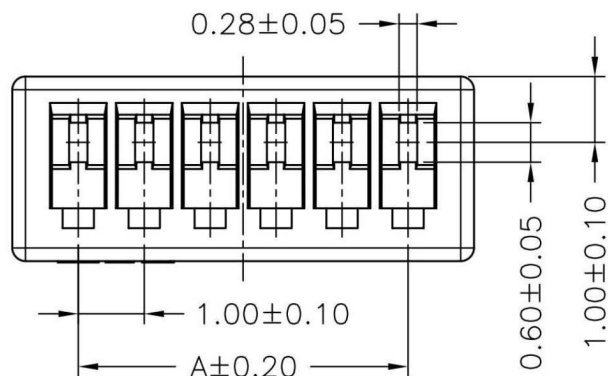


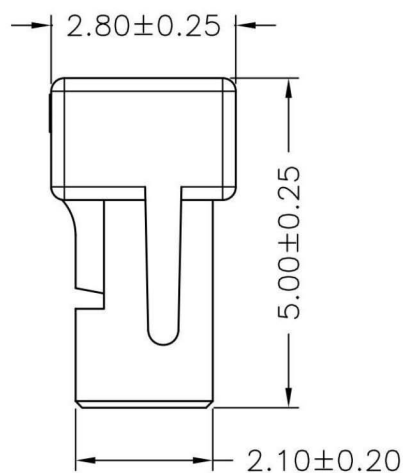

SPECIFICATIONS
Current Rating: 1A AC,DC
Voltage Rating: 50V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Material: Nylon 66-V0 Halogen Free
Color: White

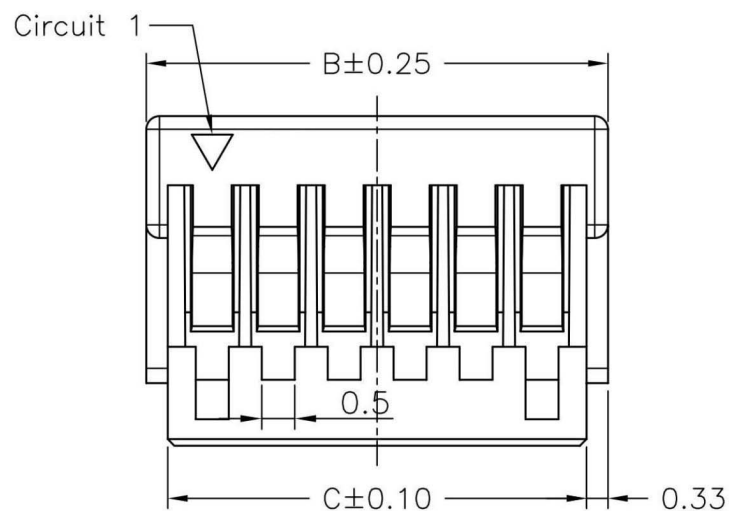

Circuit No.	Dimensions			Circuit No.	Dimensions		
	A	B	C		A	B	C
02P	1.00	3.00	2.35	12P	11.00	13.00	12.35
03P	2.00	4.00	3.35	13P	12.00	14.00	13.35
04P	3.00	5.00	4.35	14P	13.00	15.00	14.35
05P	4.00	6.00	5.35	15P	14.00	16.00	15.35
06P	5.00	7.00	6.35	16P	15.00	17.00	16.35
07P	6.00	8.00	7.35	17P	16.00	18.00	17.35
08P	7.00	9.00	8.35	18P	17.00	19.00	18.35
09P	8.00	10.00	9.35	19P	18.00	20.00	19.35
10P	9.00	11.00	10.35	20P	19.00	21.00	20.35
11P	10.00	12.00	11.35	24P	23.00	25.00	24.35


RoHS
Compliant

Gold Star Connectors Co., Ltd.

APPD.
核准 HELEN

DWG.
製圖 ABBY

DATE 制表日
2016/06/08



SCALE
比例 參考

UNIT
單位 MM

PAGE
張數 1 OF 1

TOLERANCE
容許公差
X. X±0.25
X. XX±0.15
X. XXX±0.05

SIZE.
紙張尺寸 A 4

REV.
版次 A

PART NAME 品名
1mm SINGLE ROW HOUSING
W/O PROTRUSIONS

PART NO.
料號 JNCHS100-xxNP