

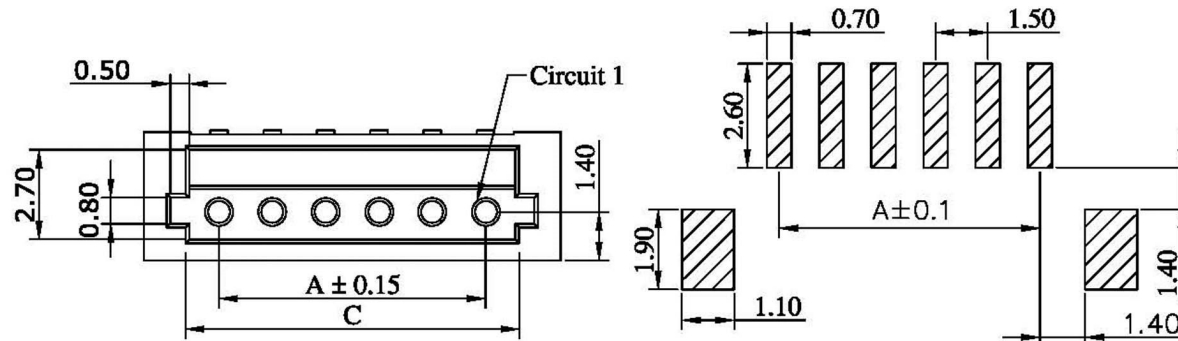




RECOMMENDED P.C.BOARD HOLE DIMM.

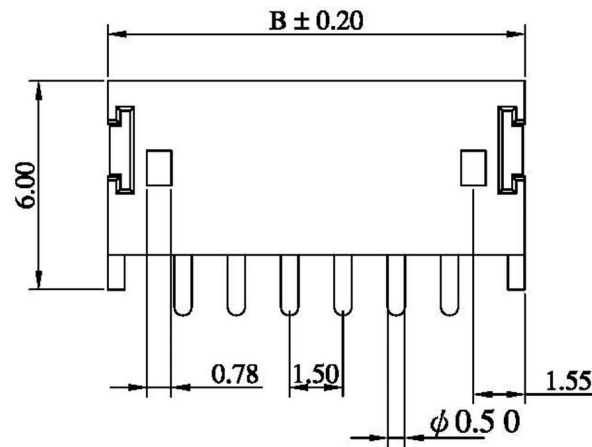

SPECIFICATIONS

Current rating : 1A AC,DC

Voltage rating : 100V AC,DC

Temperature range : -25°C to +85 °C

Contact resistance : 20m Ω Max.

Insulation resistance : 500M Ω Min.

Withstanding voltage : 500V AC/minute

Material : Pin-Brass/Tin-plated

Base-Nylon 9T, UL94V-0

Poles	Dimension (mm)		
	A	B	C
2	1.50	6.00	3.60
3	3.00	7.50	5.10
4	4.50	9.00	6.60
5	6.00	10.50	8.10
6	7.50	12.00	9.60
7	9.00	13.50	11.10
8	10.50	15.00	12.60
9	12.00	16.50	14.10
10	13.50	18.00	15.60
12	16.50	21.00	18.60

RoHS
Compliant

Gold Star Connectors Co., Ltd.

APPD.
核准 Yumi

DWG.
製圖 Helen

DATE 制表日
2022/12/14

SCALE
比例 參考

UNIT
單位 M M

PAGE
張數 1 OF 1

TOLERANCE
容許公差
XX ± 0.2
XX ± 0.3
ANG. ±

SIZE.
紙張尺寸 A 4

REV.
版次 C

PART NAME 品名

1.5mm RIGHT ANGLE WAFER

PART NO.

料號 JNCW150-xxR-SMD