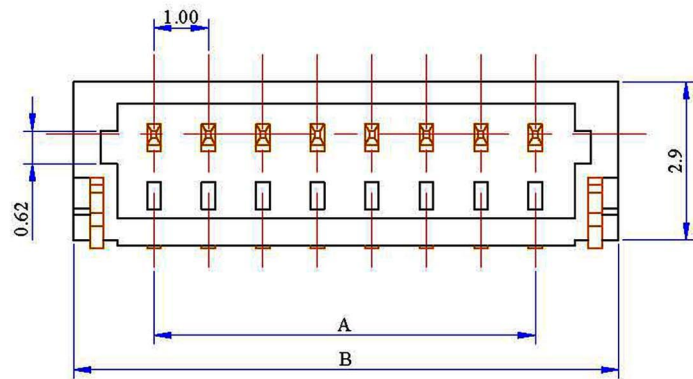


Specifications

Electrical

Voltage Rating: 50V(AC)

Current Rating: 1.0A

Contact Resistance: 20mΩ max.

Dielectric Withstanding Voltage: 500V AC/1min.

Insulation Resistance: 100M Ω min.

Material and Finish



Circuits: 2~16P&20p

Insulator: Nylon 6T, UL94V-0

Color: Natural

Contact: Phosphor Bronze, Tin-Plated

Temperature Range: -40°C~+105°C

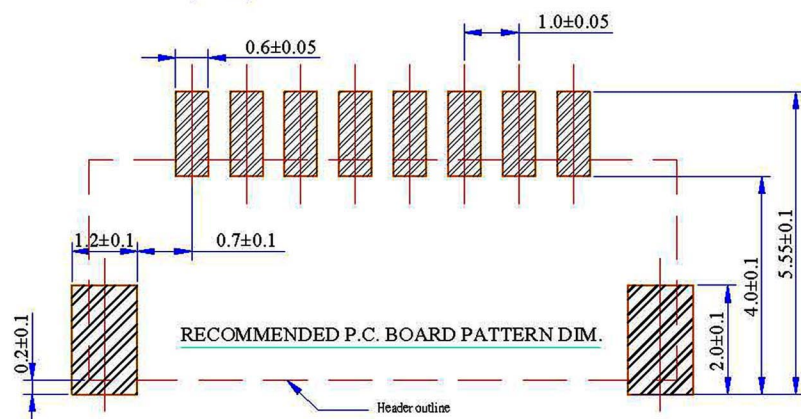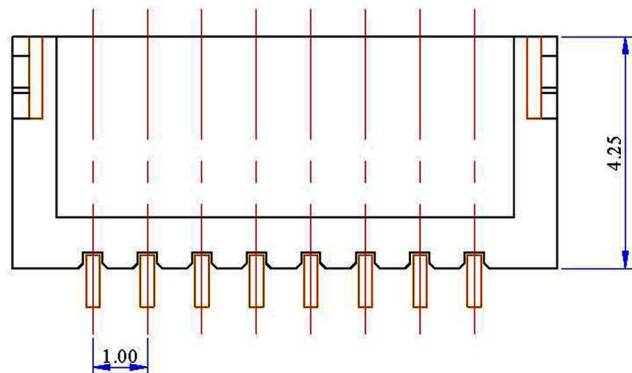

Poles	Dimension mm (in.)	
	A	B
2	1.0(0.039)	4.0(0.157)
3	2.0(0.079)	5.0(0.197)
4	3.0(0.118)	6.0(0.236)
5	4.0(0.157)	7.0(0.276)
6	5.0(0.197)	8.0(0.315)
7	6.0(0.236)	9.0(0.354)
8	7.0(0.276)	10.0(0.394)
9	8.0(0.315)	11.0(0.433)
10	9.0(0.354)	12.0(0.472)
11	10.0(0.394)	13.0(0.512)
12	11.0(0.433)	14.0(0.551)
13	12.0(0.472)	15.0(0.591)
14	13.0(0.512)	16.0(0.630)
15	14.0(0.551)	17.0(0.669)
16	15.0(0.590)	18.0(0.708)
20	19.0(0.748)	22.0(0.866)

RoHS
Compliant

Gold Star Connectors Co., Ltd.

APPD.
核准



TOLERANCE
容許公差

PART NAME 品名

DWG.
製圖

Hedy

SCALE
比例 參考

UNIT
單位 MM

1mm SINGLE ROW
SIDE ENTRY WAFER

DATE 制表日

2009/12/24

PAGE
張數 1 / 1

REV.
版次 A

PART NO.

料號 JNCWS100-xxR-SMD