

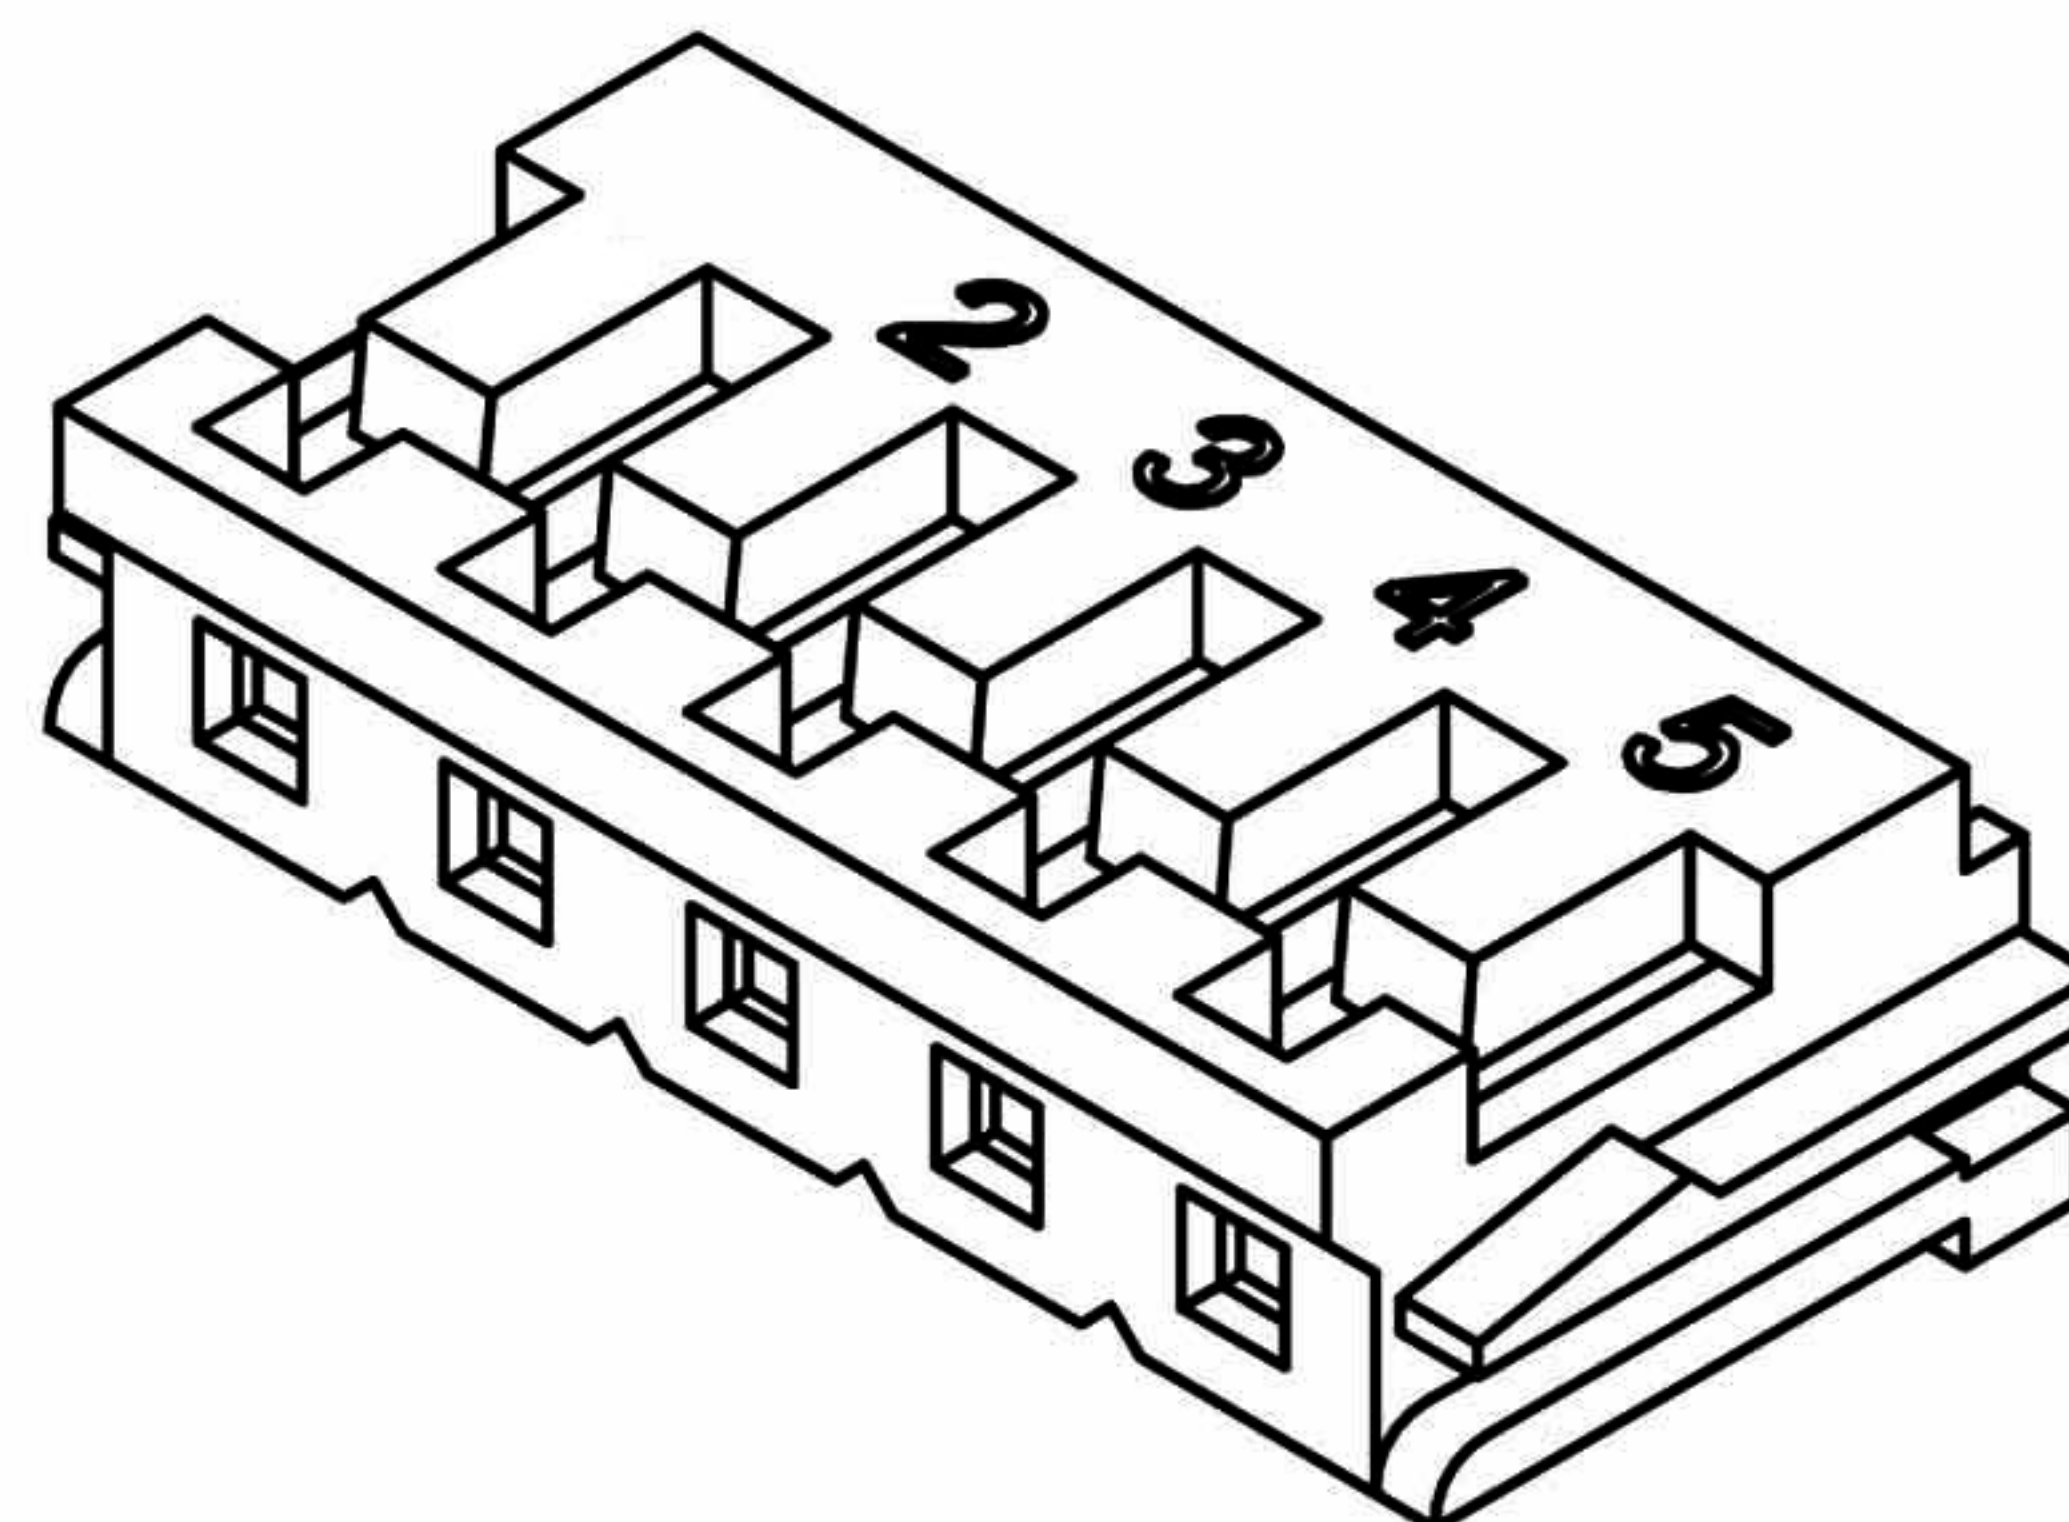
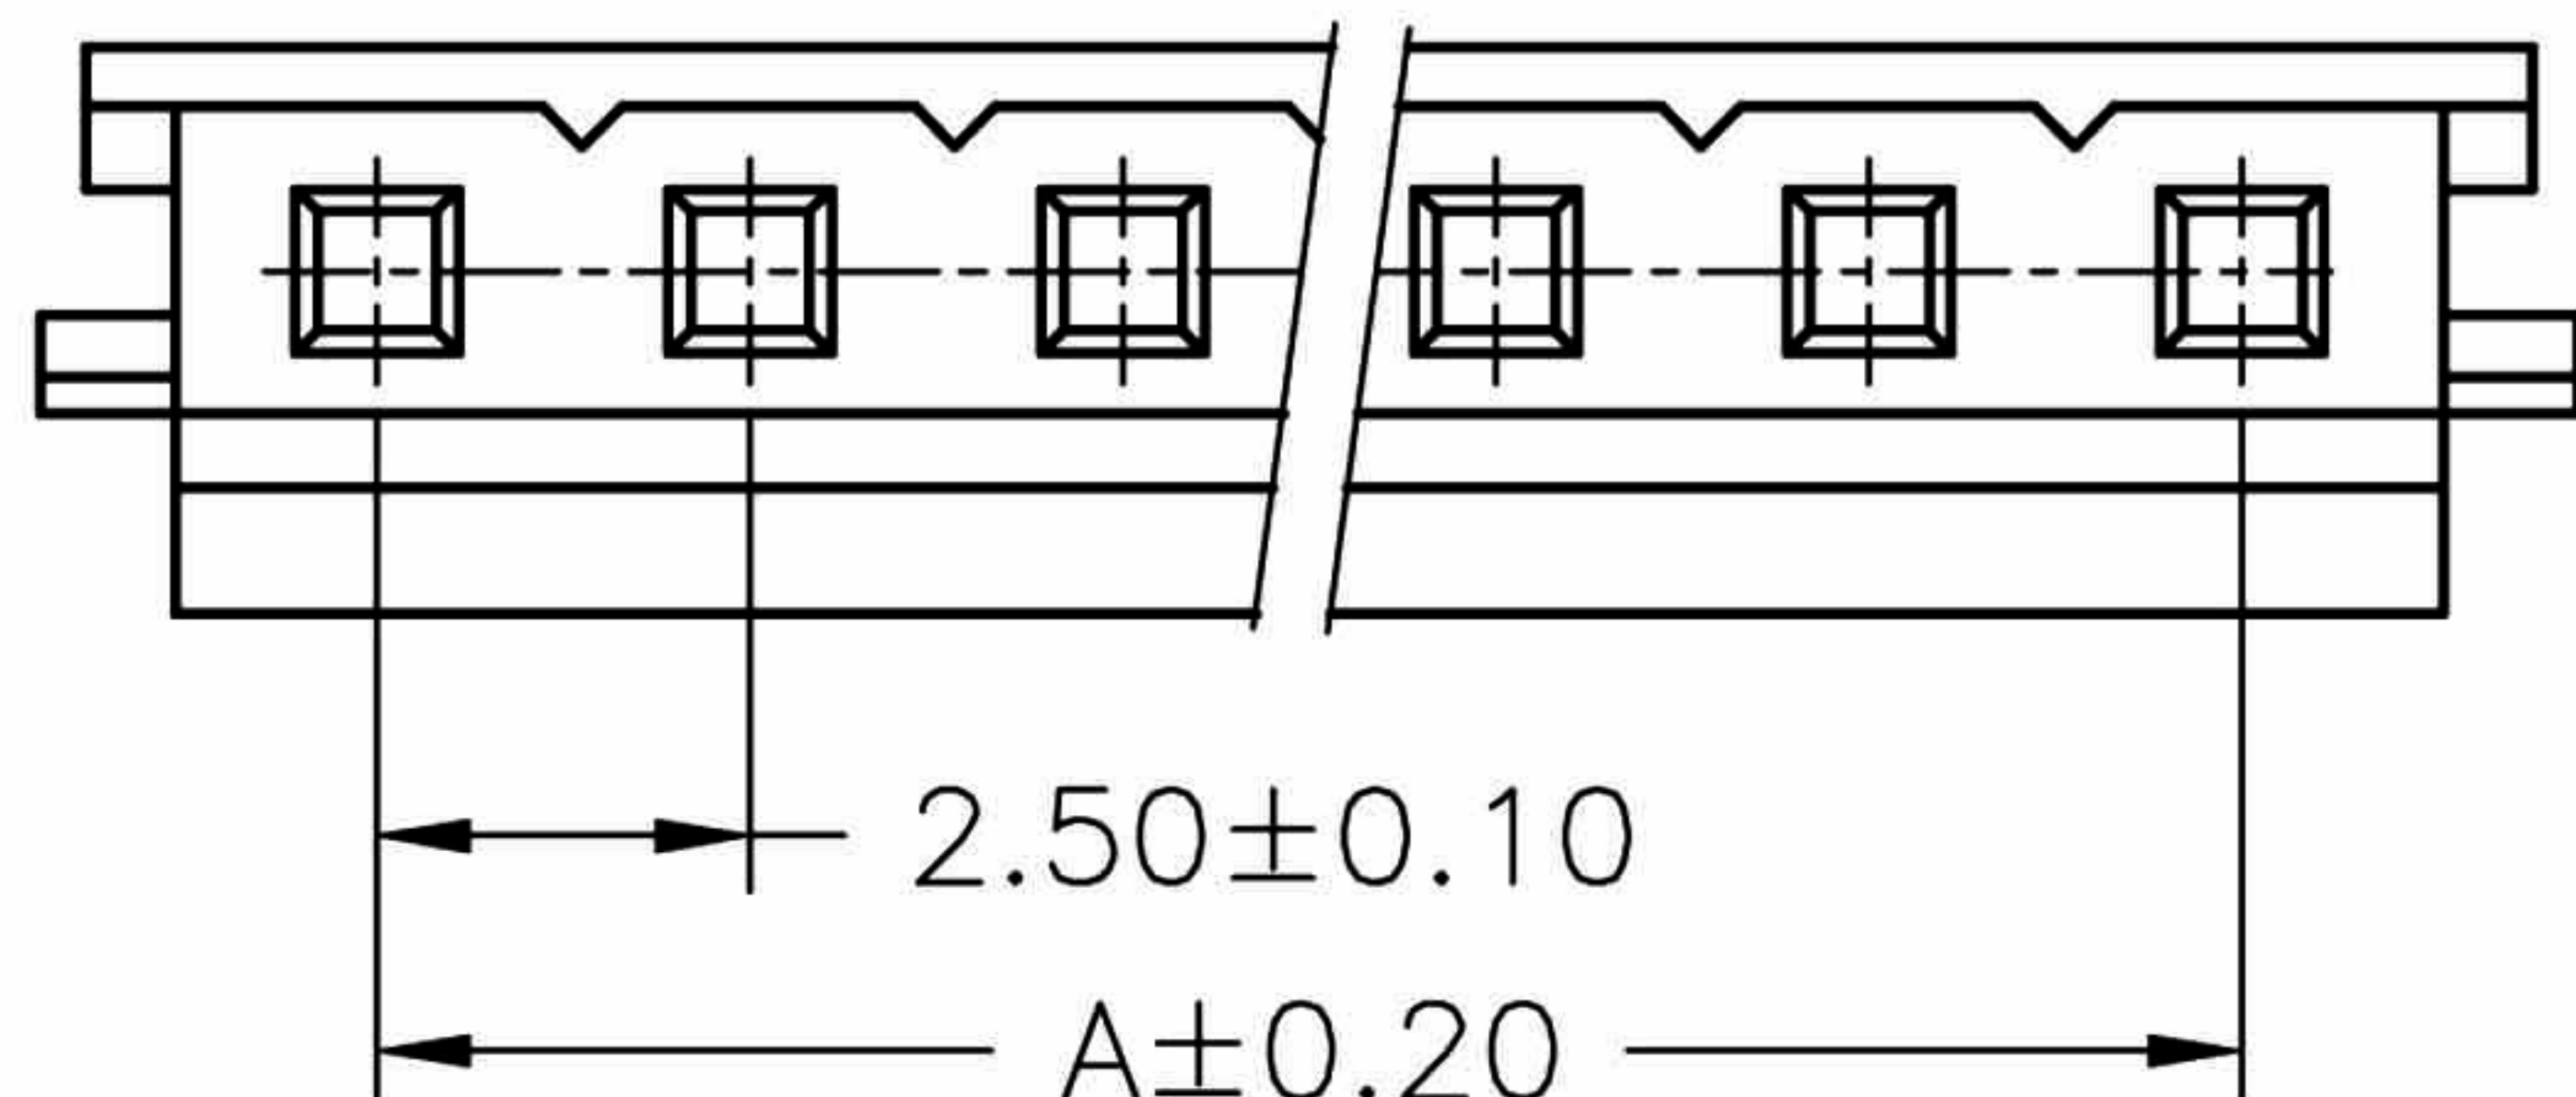


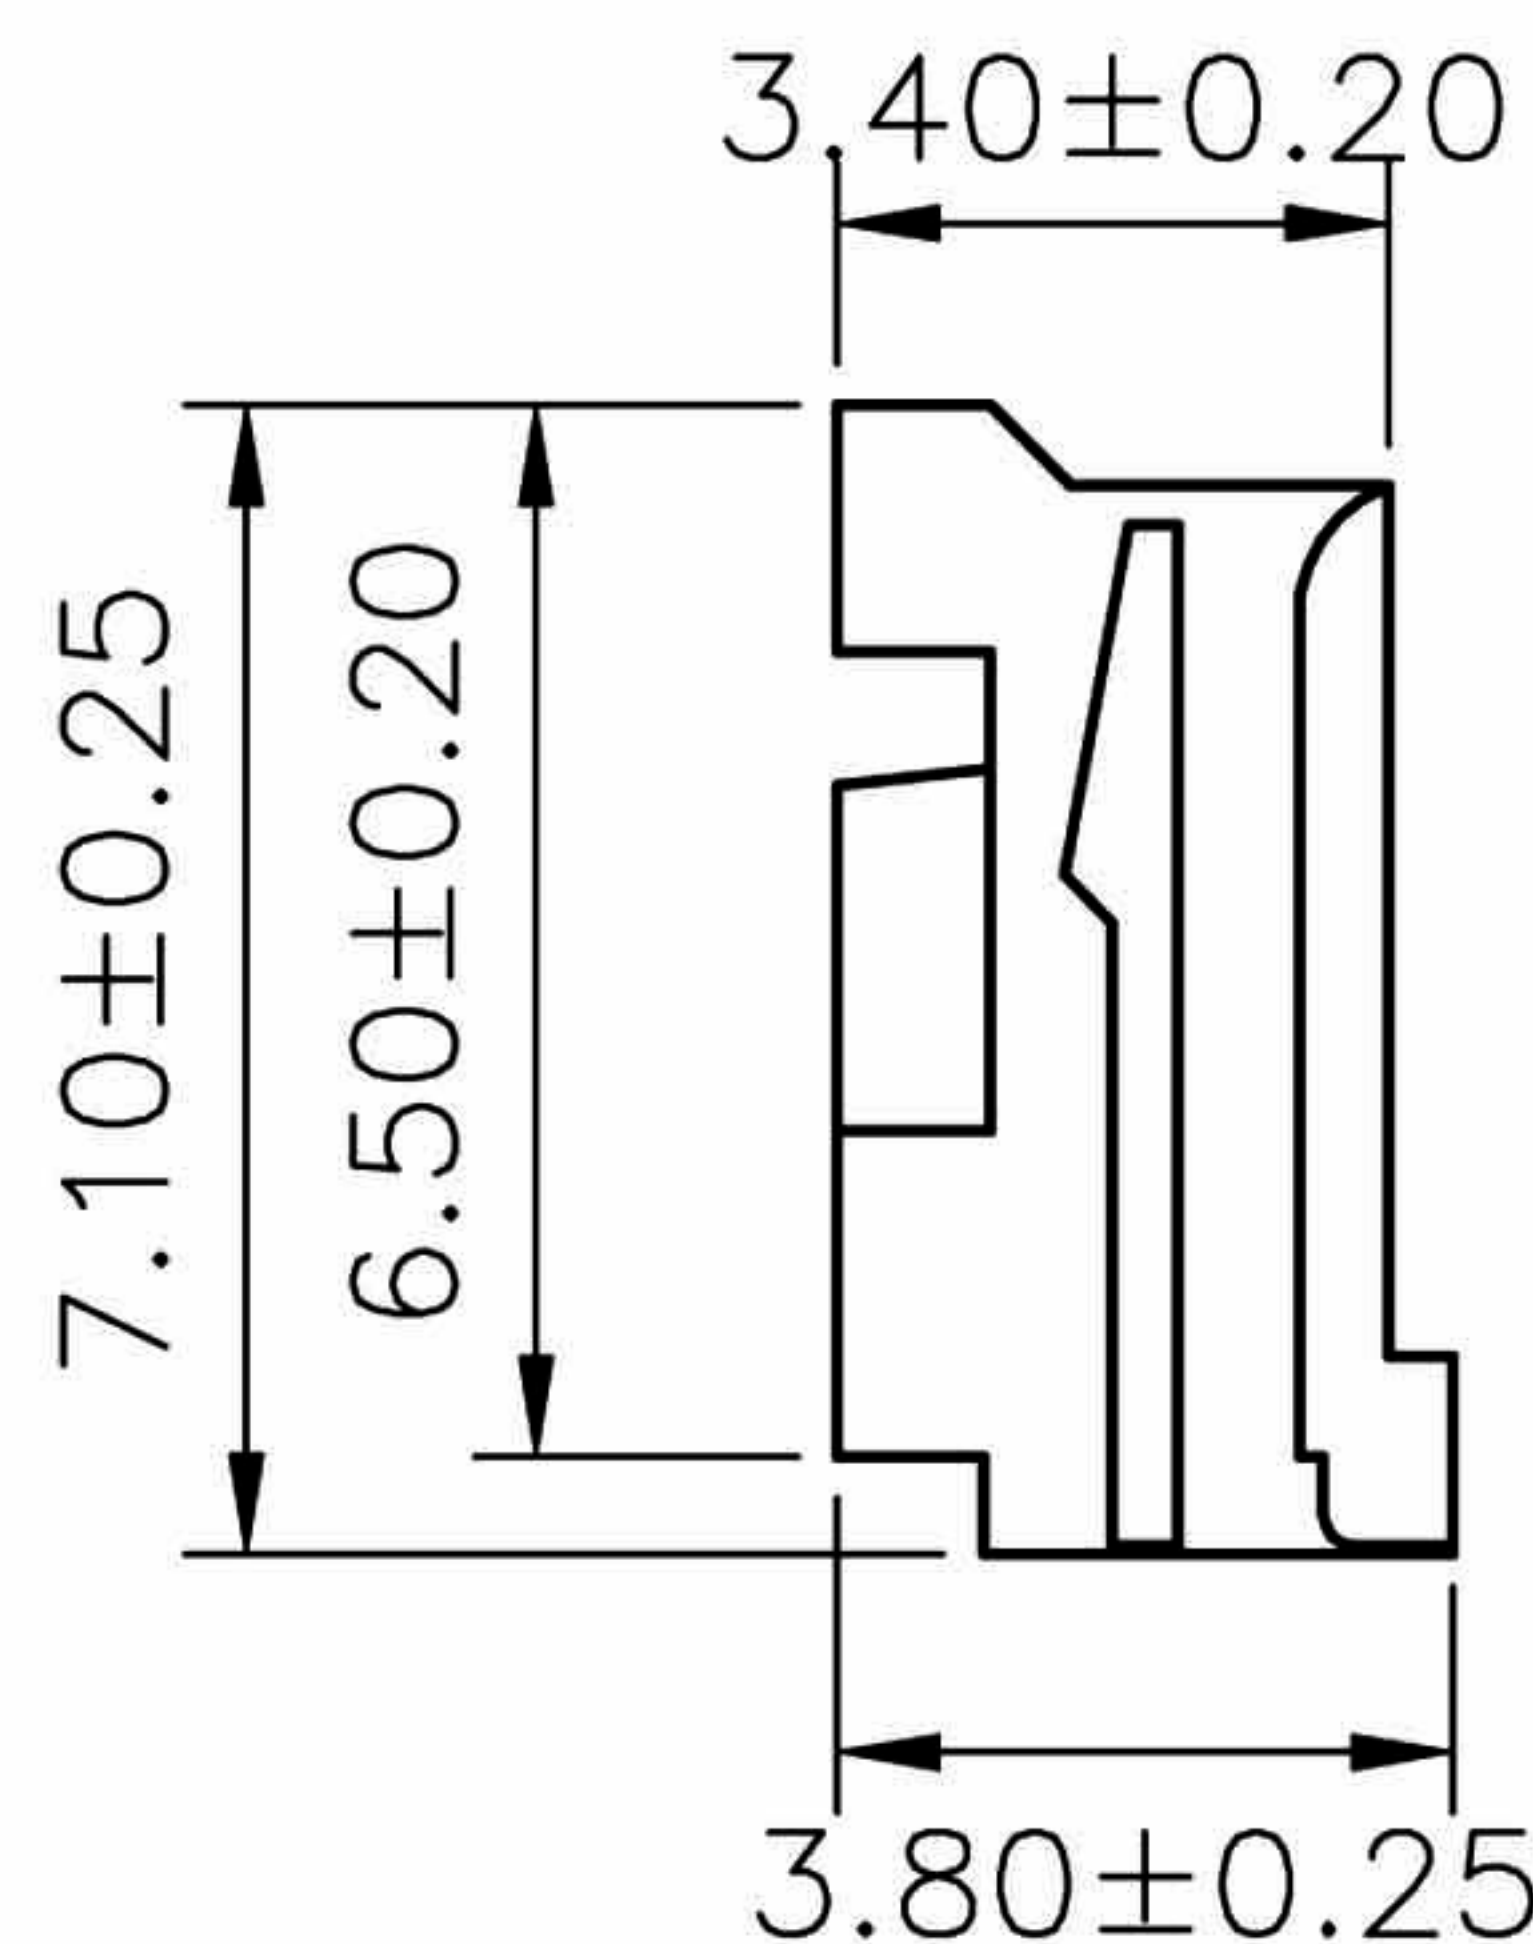

SPECIFICATIONS
Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 800V AC/minute
Material: Nylon 66,UL94V-0
Color: Natural(White)

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
02	2.50	7.00
03	5.00	9.50
04	7.50	12.00
05	10.00	14.50
06	12.50	17.00
07	15.00	19.50
08	17.50	22.00
09	20.00	24.50
10	22.50	27.00
11	25.00	29.50
12	27.50	32.00
13	30.00	34.50
14	32.50	37.00
15	35.00	39.50

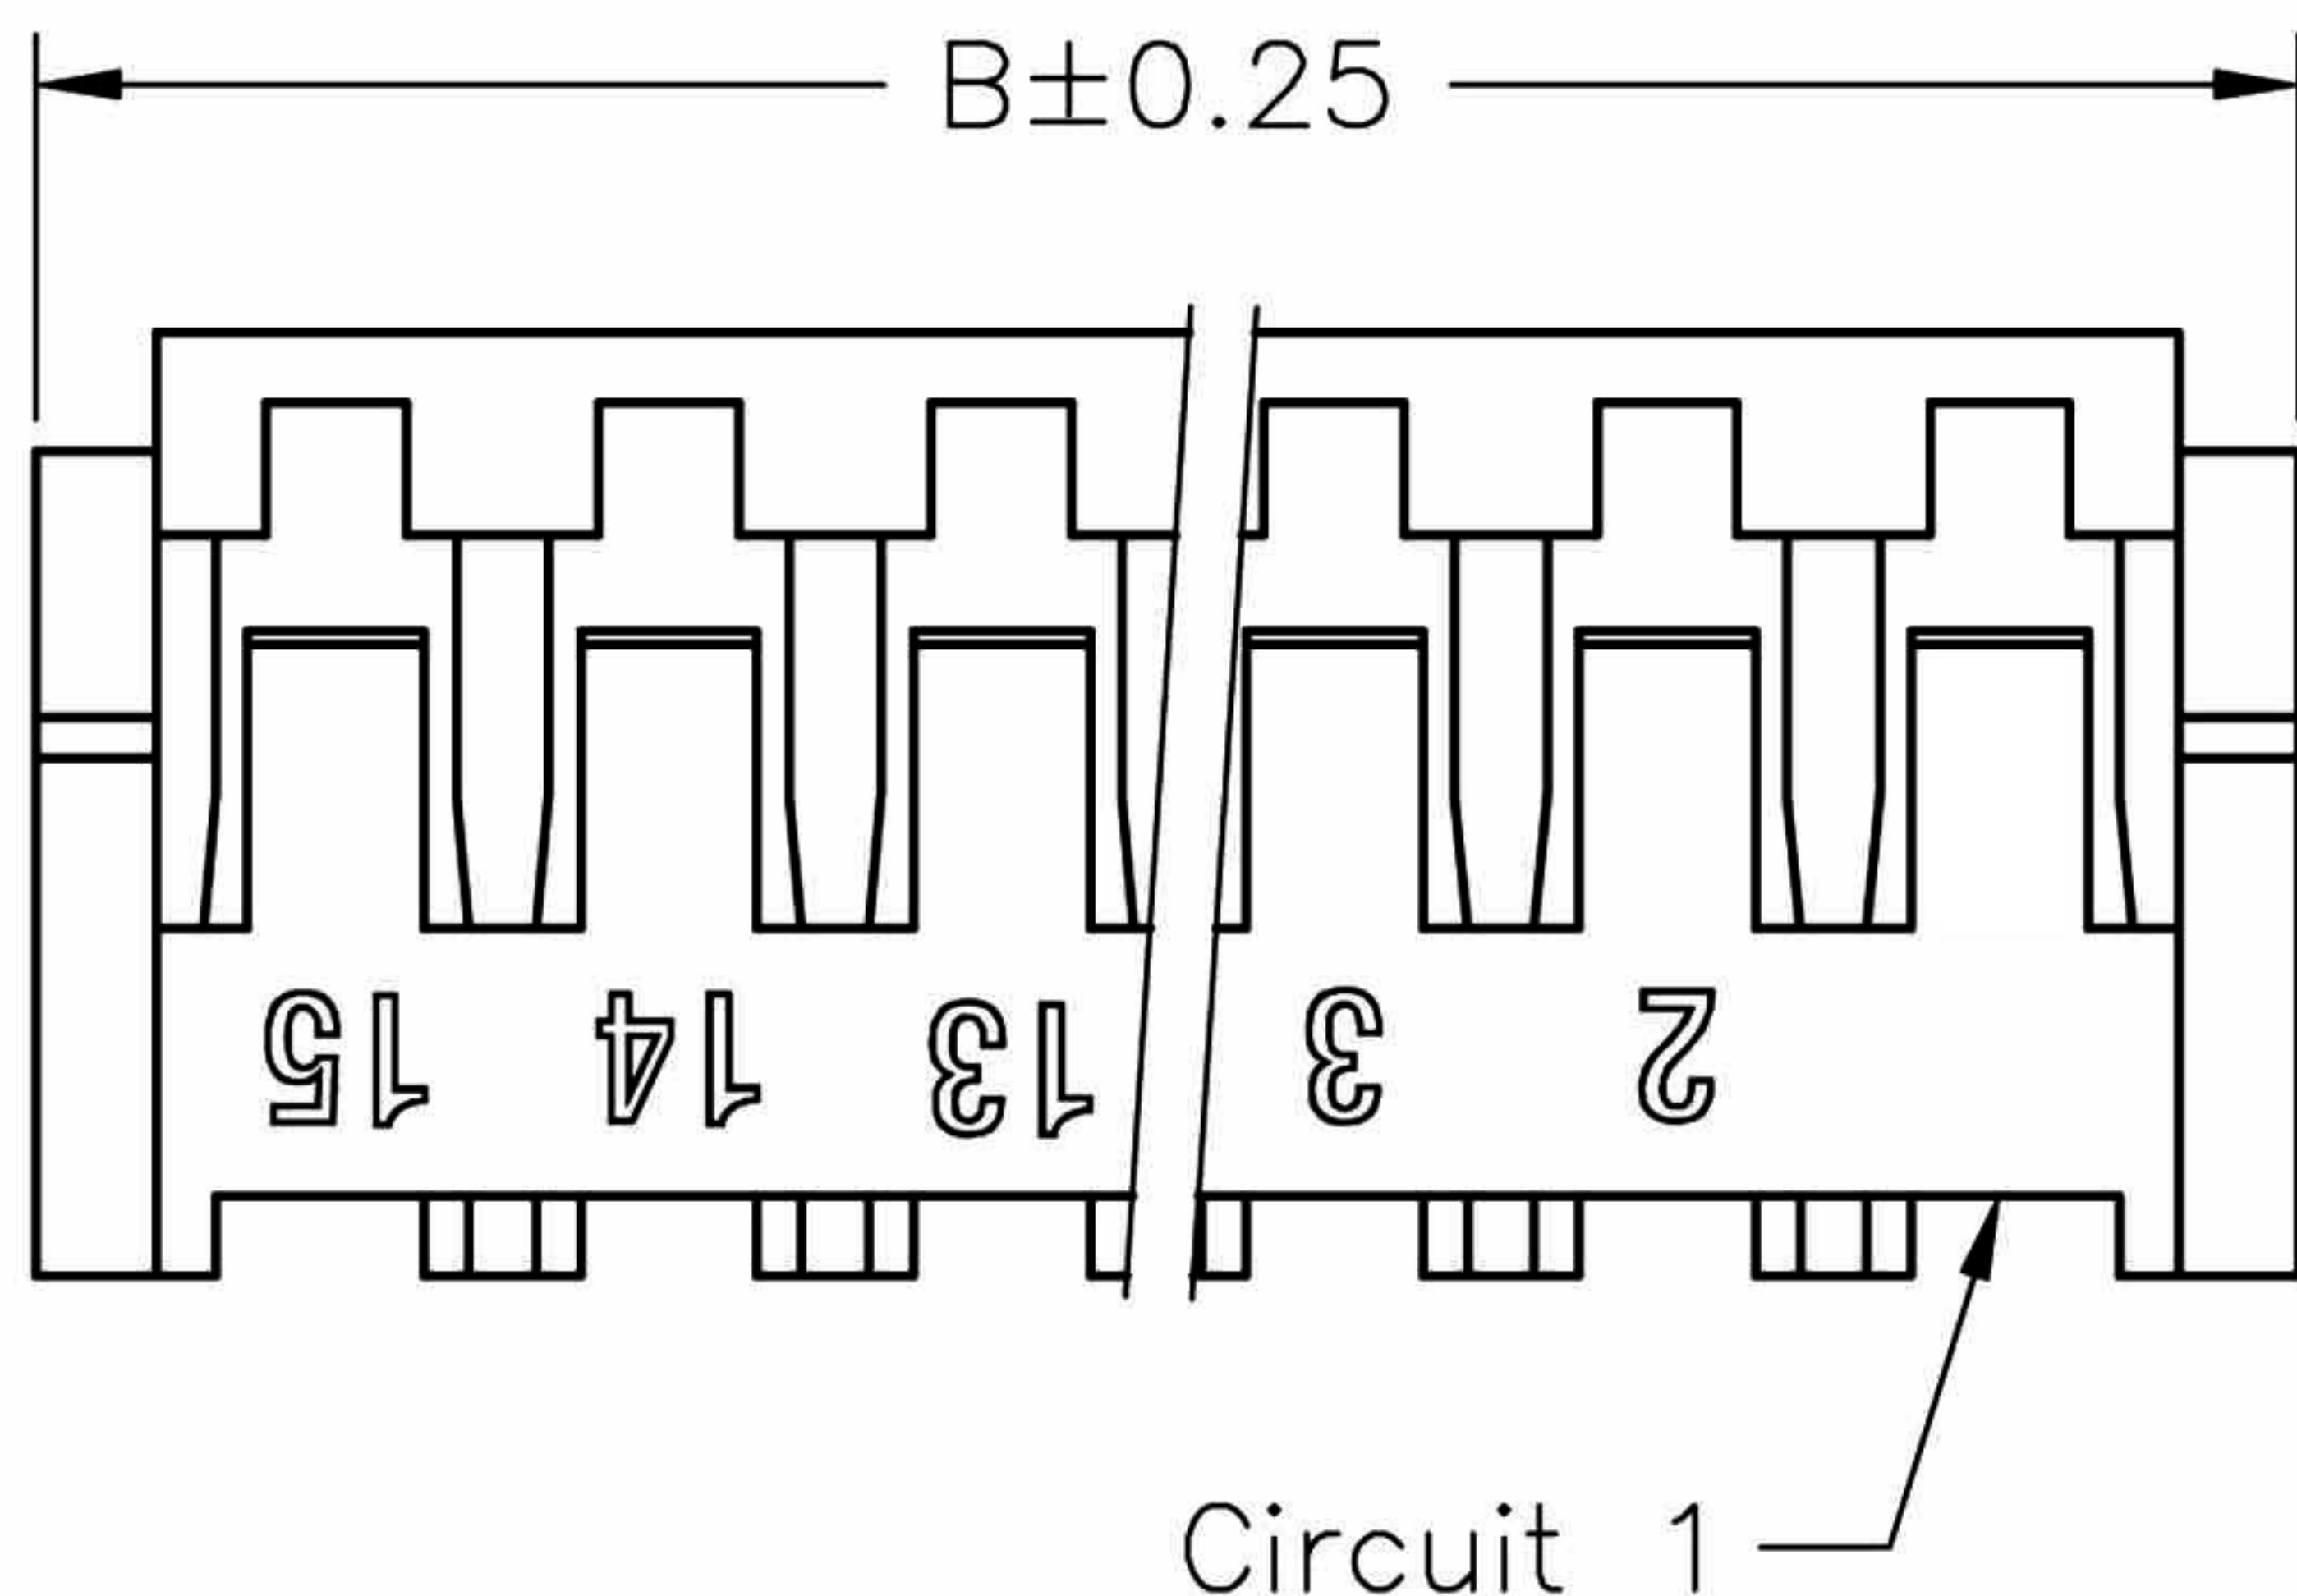


RoHS
Compliant

Gold Star Connectors Co., Ltd.

APPD.
核准 *Angel*

DWG.
製圖 *Jolin*

DATE 制表日
2007/03/01

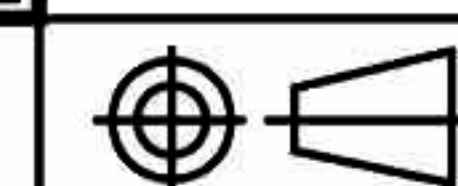

SCALE
比例 參考

UNIT
單位 M M

PAGE
張數 1 OF 1

TOLERANCE
容許公差
X.X±0.25
X.XX±0.15
X.XXX±0.05

SIZE.
紙張尺寸 A 4

REV.
版次 A

PART NAME 品名

HOUSING (2.5mm) ROHS

PART NO.

料號 MNCH-xx