


NON-INSULATED RING TERMINALS

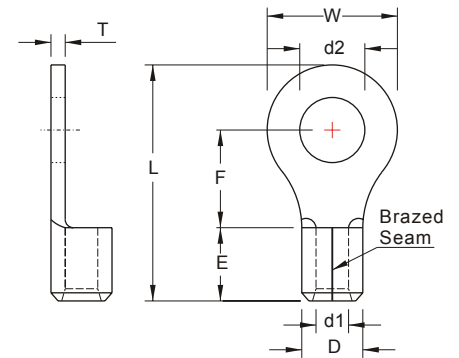

MAXIMUM ELECTRIC CURRENT:

A.W.G.	16	14
AMP.	18	30

TERMINAL MATERIAL: COPPER

WIRE RANGE A.W.G. mm ²	ITEM NO.		STUD SIZE		DIMENSION ^{inch} mm						CRIMPING TOOL	Q'TY BOX		
	BRAZED SEAM	BUTTED SEAM	d2		W	F	L	E	D	d1			T	
16-14 A.W.G.	RNB2-2	RN2-2	#2	.087 2.2	.260 6.6	.189 4.8	.504 12.8	.189 4.8	.161 4.1	.091 2.3	.031 0.8	IZUMI MODEL 5N18 WITH DIE INDEX NO.:2 OR K.S. MODEL KST2000D-1322 WITH DIE INDEX NO.:16-14 OR K.S. MODEL KM-70L WITH DIE SET NO.:DIE-1322 WITH DIE INDEX NO.:16-14	1000	
	RNB2-2.5 ※	RN2-2.5 ※	#3	.098 2.5									1000	
	RNBS2-3.2	RNS2-3.2	#4	.126 3.2	.217 5.5	.220 5.6	.520 13.2						1000	
	RNB2-3.2 ■*	RN2-3.2	#4	.126 3.2	.260 6.6	.189 4.8	.504 12.8						1000	
	RNBL2-3.2 ■	RNL2-3.2	#4	.126 3.2	.335 8.5	.307 7.8	.661 16.8						1000	
	RNBS2-3.7 *	RNS2-3.7	#6	.146 3.7	.260 6.6	.189 4.8	.504 12.8						1000	
	RNBM2-3.7 *	RNM2-3.7	#6	.146 3.7		.248 6.3	.567 14.4						1000	
	RNBL2-3.7 *	RNL2-3.7	#6	.146 3.7	.335 8.5	.291 7.4	.650 16.5						1000	
	RNBS2-4 ■*	RNS2-4	#8	.169 4.3	.260 6.6	.248 6.3	.567 14.4						1000	
	RNBL2-4 ■*	RNL2-4	#8	.169 4.3	.335 8.5								.650 16.5	1000
	RNBS2-5 ■*	RNS2-5	#10	.209 5.3										.291 7.4
1.5-2.5 mm ²	RNBL2-5 ■*	RNL2-5	#10	.209 5.3	.374 9.5		.669 17.0						1000	
	RNB2-6 ■*	RN2-6	1/4	.252 6.4	.472 12.0	.433 11.0	.858 21.8						1000	
	RNB2-7 ※	RN2-7 ※	5/16	.291 7.4									1000	
	RNB2-8 ■*	RN2-8	5/16	.331 8.4									1000	
	RNBL2-8	RNL2-8	5/16	.331 8.4	.535 13.6	.547 13.9	1.004 25.5						1000	
	RNB2-9	RN2-9	5/16	.386 9.8									1000	
	RNB2-10 ■*	RN2-10	3/8	.413 10.5									1000	
	RNBL2-10	RNL2-10	3/8	.413 10.5	.756 19.2	.630 16.0	1.197 30.4						1000	
	RNB2-12	RN2-12	1/2	.512 13.0	.756 19.2								1000	
	RNB2-14	RN2-14	9/16	.591 15.0	1.063 27.0	.827 21.0	1.547 39.3						1000	
	RNB2-16	RN2-16	5/8	.669 17.0									1000	
RNB2-20	RN2-20	3/4	.827 21.0	1000										