

ELECTRICAL CHARACTERISTICS





Contact Current Rating: 3Ampers
 Dielectric Withstanding Voltage: AC 500V at sea level.
 Insulation Resistance: 1000Mohms Min.
 Contact Resistance: 30Milliohms Max.
 Operation Temperature : -55°C to +105°C.

Material

Contact : Copper Alloy.
 Insulator: PBT. Black
 Shell: SPCC.
 Z-Piece: Fe.
 Screw: Copper Alloy.
 Rivet: Copper Alloy.

Note:

No.	A	B	C
09	16.92	24.99	30.81
15	25.25	33.32	39.14
25	38.96	47.04	53.04
37	55.42	63.50	69.32

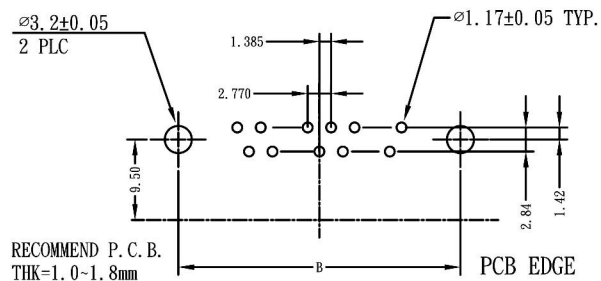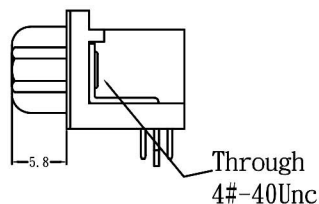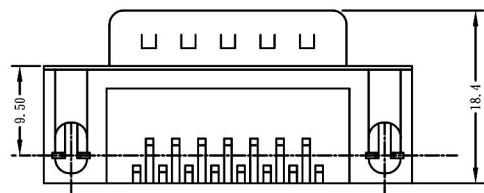

RoHS Compliant		T&T Connection System Co., Ltd.	
APPD.	SCALE	TOLERANCE	PART NAME 品名
DWG.	参考	.0 ±0.3 .00 ±0.25 ANG. ±2°	MALE PCB DSUB 90° CONNECTOR 7.2mm
DATE	UNIT	SIZE.	PART NO.
2012/08/02	M M	A 4	料 號 DB-9RP-C
	PAGE	REV.	
	1 OF 1	B	