
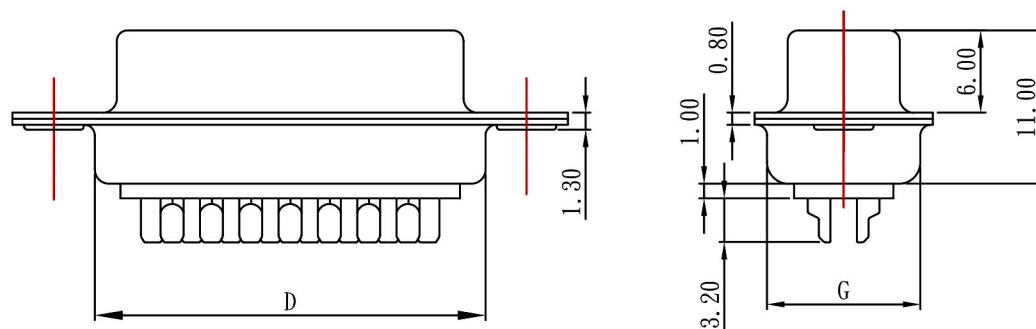


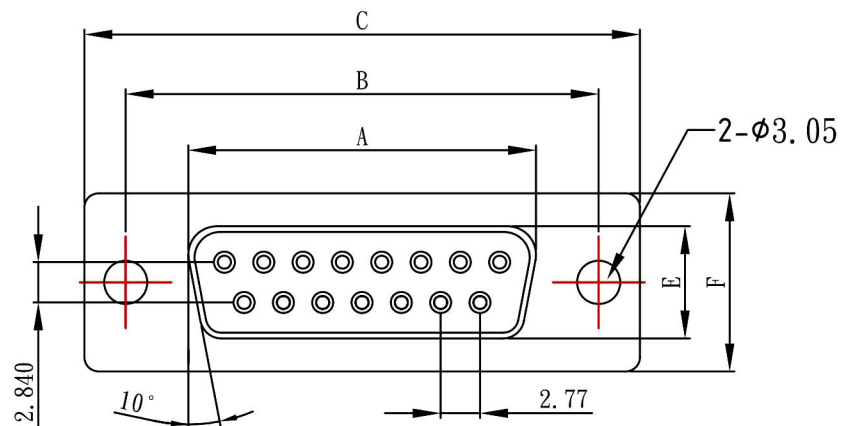

ELECTRICAL DATA:

Rated Voltage: 350V AC

Rated Current: 5A

Withstand Voltage: 500V AC(RMS)

Insulation Resistance: Over 1000MΩ

Contact Resistance: 30 mΩ Max.

Temperature : -40°C to +100°C.

Material:

Insulator: PBT+30% Glass Fiber UL94V-0 Black

Pin contacts: Brass Selective Gold Flash

Shell: Steel, Nickel Plated

M/F DIM	A	B	C	D	E	F	G
09	16.30	25.00	30.80	19.30	7.90	12.50	10.70
15	24.70	33.30	39.10	27.50	7.90	12.50	10.70
25	38.40	47.00	53.00	41.30	7.90	12.50	10.70
37	54.80	63.50	69.30	57.70	7.90	12.50	10.70
50	52.40	61.10	66.90	55.30	10.80	15.40	13.60

**RoHS
Compliant**

T&T Connection System Co., Ltd.

APPD.
HELEN

SCALE
参考

TOLERANCE
.0 ±0.30
.00 ±0.20
.000 ±0.10

DWG.
ABBY

UNIT
M M

SIZE.
A 4

DATE
2014/04/01

PAGE
1 OF 1

REV.
B

PART NAME 品名
**STAMPED PIN SOLDER TYPE
FEMALE D-SUB CONNECTOR**

PART NO.
料 號 **DB-xxSS**