

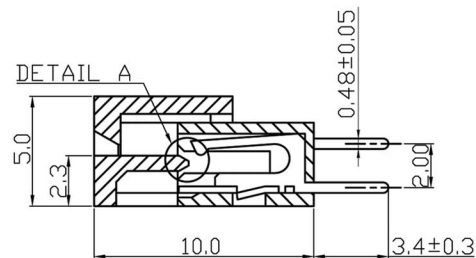
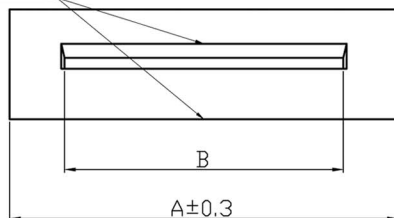



0.2MAX




OPEN TYPE

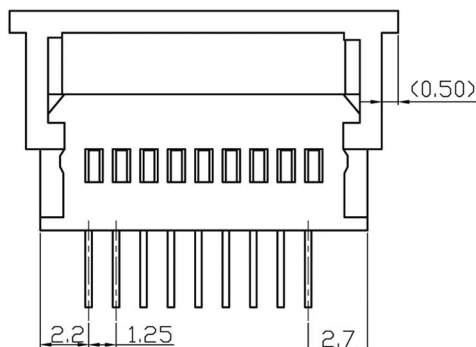

DETAIL A
CLOSE TYPE

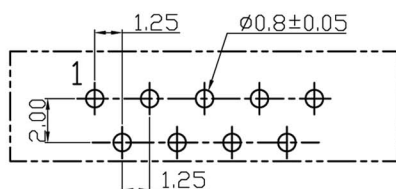

RECOMMEND PCB LAYOUT
COMPONENT SIDE

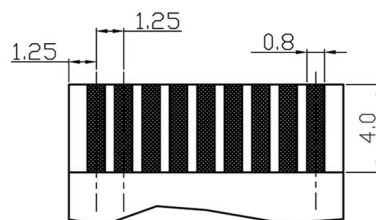

FFC/FPC DIMENSION
THICKNESS 0.3±0.05mm

CKT	A	B
3	9.55	5.20
4	10.80	6.45
5	12.05	7.70
6	13.30	8.95
7	14.55	10.20
8	15.80	11.45
9	17.05	12.70
10	18.30	13.95
11	19.55	15.20
12	20.80	16.45
13	22.05	17.70
14	23.30	18.95
15	24.55	20.20
16	25.80	21.45
17	27.05	22.70
18	28.30	23.95
19	29.55	25.20
20	30.80	26.45
21	32.05	27.70
22	33.30	28.95
23	34.55	30.20
24	35.80	31.45
25	37.05	32.70
26	38.30	33.95
27	39.55	35.20
28	40.80	36.45
29	42.05	37.70
30	43.30	38.95
31	44.55	40.20
32	45.80	41.45

NOTES

1. MATERIALS:

HOUSING—PBT UL 94V-0

TERMINAL—COPPER ALLOY

Ambient Temperature Range -20 degree to +85 degree.

Electrical

Item	Requirement	Test Condition
Rated Voltage	200V(ac/dc)	Mate connectors measure by dry circuit.
Rated Current	1Amp(ac/dc)	
Contact Resistance	20mΩ	Mate connectors measure by dry circuit 20mV max, 10mA.
Insulation Resistance	500MΩ	Mate connectors, apply 500V dc between adjacent terminal or ground.
Dielectric Strength	No Breakdown	Mate connectors, apply 500V ac for 1 minute between adjacent terminal or ground.

RoHS
Compliant

T&T Connection System Co., Ltd.

APPD.
核准

DWG.
製圖

DATE 制表日

2016/06/23

SCALE
比例

UNIT
單位

PAGE
張數

1 / 1

TOLERANCE
0.0 ±0.30
0.00 ±0.25
0.000 ±0.15
Angle ±3°

SIZE.
紙張尺寸

REV.
版次

B

PART NAME 品名

1.25mm FFC/FPC 180°
DUAL ROW IVORY

PART NO.

料號 FFCZD125-xxSN