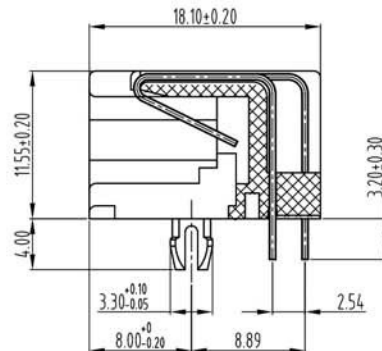




PCB LAYOUT/TOP VIEW

#### NOTES:

#### MATERIAL:

- |                               |                                                 |
|-------------------------------|-------------------------------------------------|
| 1.HOUSING                     | :GLASS FILLED POLYESTER UL94V-0                 |
| 2.CONTACT (ROUND PIN Ø0.46mm) | :PHOSPHOR BRONZE WITH GOLD PLATING OVER NICKEL. |

#### ELECTRICAL:

- |                                   |                                   |
|-----------------------------------|-----------------------------------|
| 1.VOLTAGE RATING                  | :125V AC.                         |
| 2.CURRENT RATING                  | :15AMP.                           |
| 3.CONTACT RESISTANCE              | :30 MILLIOHMS MAX.                |
| 4.INSULATION RESISTANCE           | :500 MEGOHMS MIN @ 500V DC.       |
| 5.DIELECTRIC WITHSTANDING VOLTAGE | :1000V AC RMS 50Hz OR 60Hz. 1MIN. |

#### MECHANICAL:

- |                      |                              |
|----------------------|------------------------------|
| 1.INSETION FORCE     | :2.2Kg MAX.                  |
| 2.RETENTION STRENGTH | :7.7Kg BETWEEN JACK AND PLUG |
| 3.DURABILITY         | :750 CYCLES MIN.             |

#### ENVIRONMENTAL:

- |             |                  |
|-------------|------------------|
| 1.STORAGE   | : -40°C~+85°C.   |
| 2.OPERATION | : -40°C TO 85°C. |

RoHS  
Compliant

**T&T Connection System Co., Ltd.**

APPRO.  
核准  
HELEN  
DWG.  
製圖  
ABBY  
DATE  
制表日  
2022/06/22

SCALE  
比例  
參考  
UNIT  
單位  
MM  
PAGE  
張數  
1 OF 1

TOLERANCE  
公差  
Ø ± 0.20  
± 0.15  
± 0.10  
ANG ± 0.5°  
SIZE:  
板板尺寸  
A 4  
REV.  
版次  
B

PART NAME 品名  
SIDE ENTRY PCB JACK  
6P6C BLACK ROHS  
PART NO.  
料號  
MOD66LP-1-SEB