


1 2 3 4 5 6 7 8



A

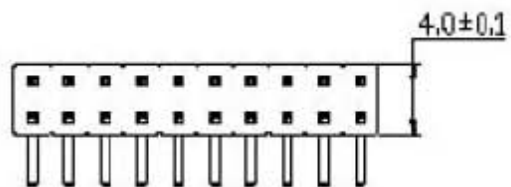

$A = 2.0 \times (\text{No of Space})$
 $B = A + 2.0$

B

C

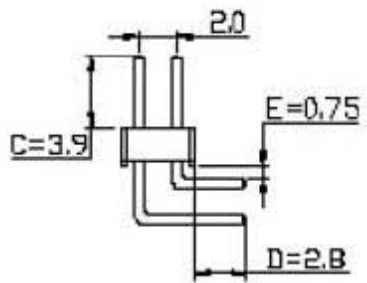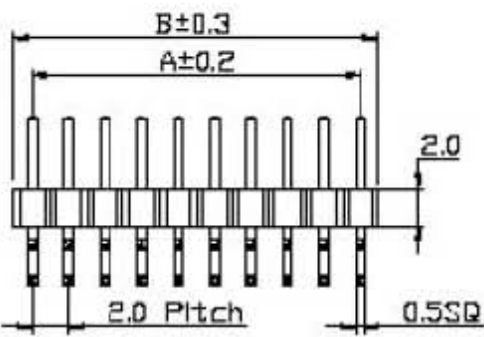

SPECIFICATIONS

Current Rating: 8 Amps
 Dielectric Withstanding AC 500V
 Operating Temperature: -40°C to +105°C
 Max Processing Temp: 250° For 30-60 seconds
 (260° For 10 seconds)

MATERIAL&FINISH


Contact: Brass
 Insulator Material: PBT
 Color: Black
 Finish: Gold Flash Plated Over Nickel

A

B

C

D

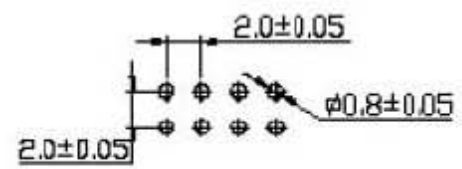

P.C. Board Layout

D

E

F

G

T&T Connection System Co., Ltd.

UNIT

SCALE

PART NAME

MM

2:1

2.0x2.0 Pin Header Dual Row H=2.0
 Right Angle(C=3.9 D=2.8 E=0.75)

APPD.

CKD.

TOLERANCE

PART NO.

REV.

制表日:2003/07/15

DRAWING.

APPROVED

JEFFREY

± 0.3

A

1 2 3 4 5 6 7 8

G

H

H