
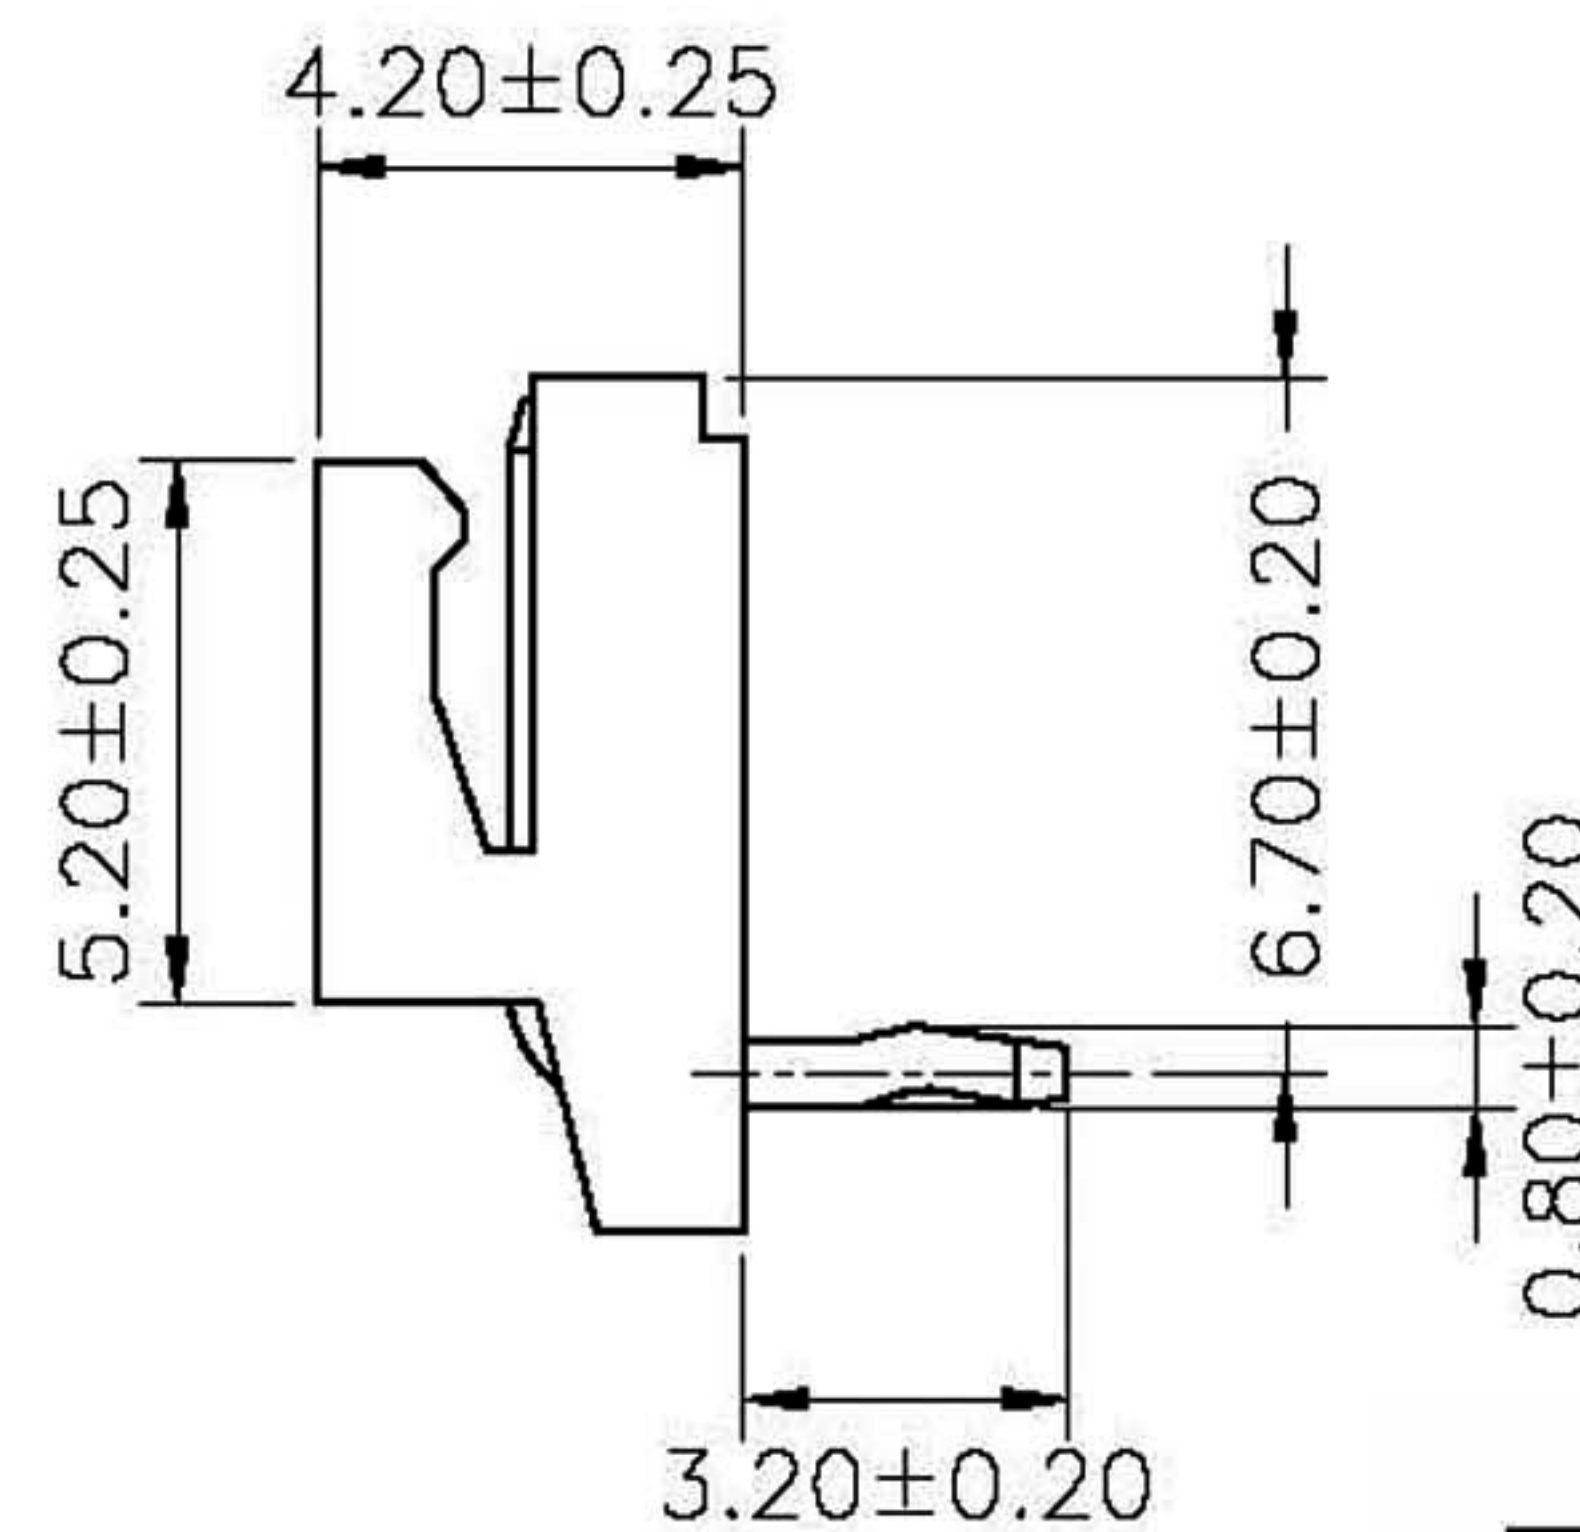
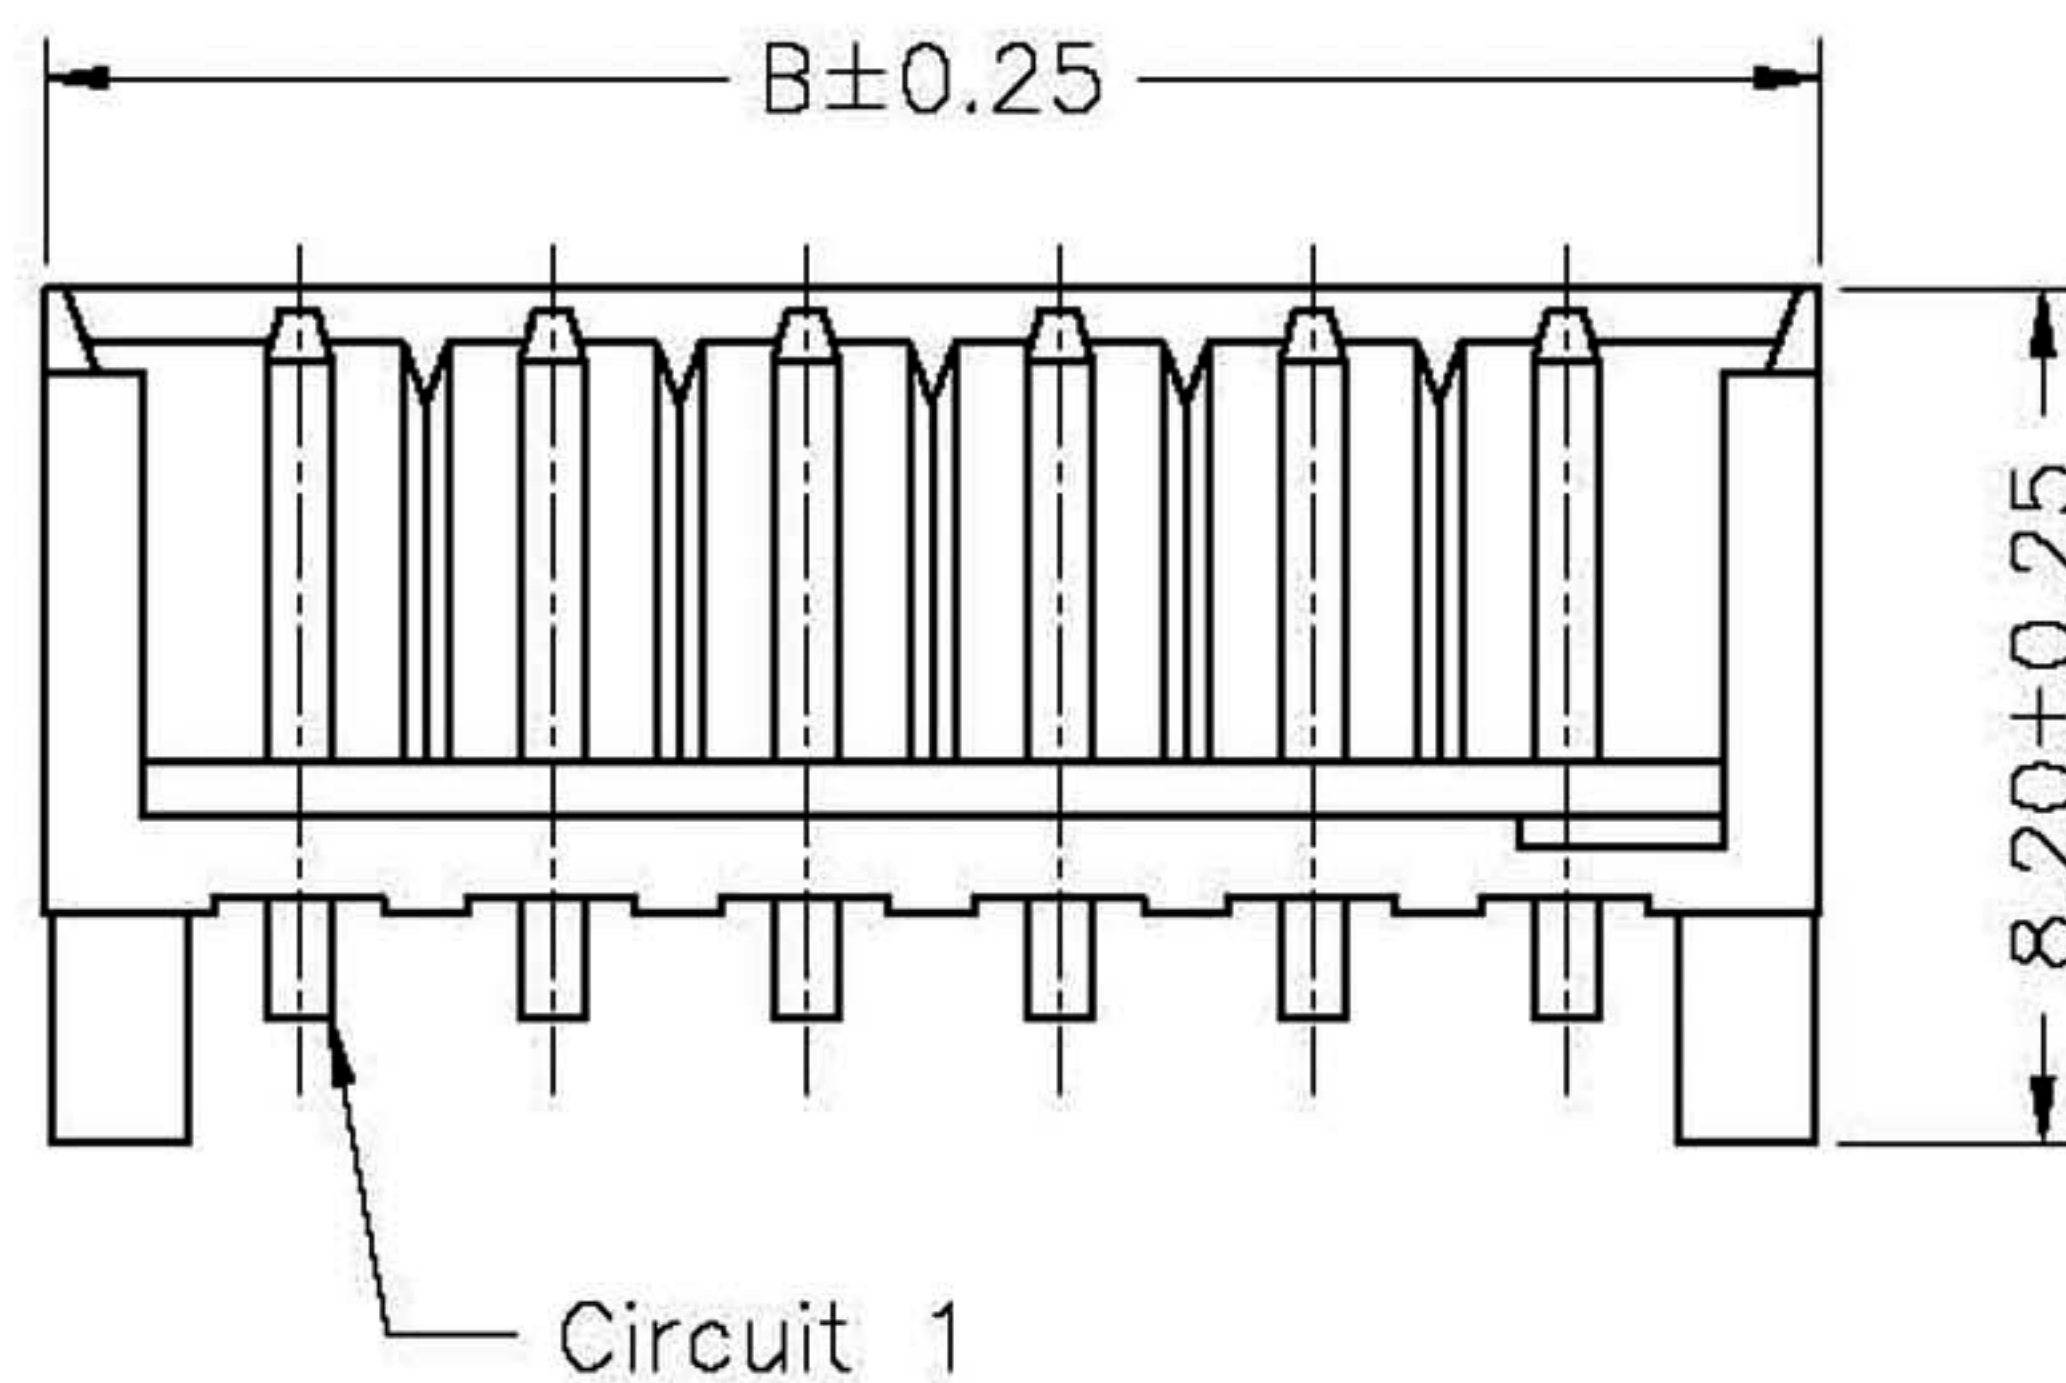
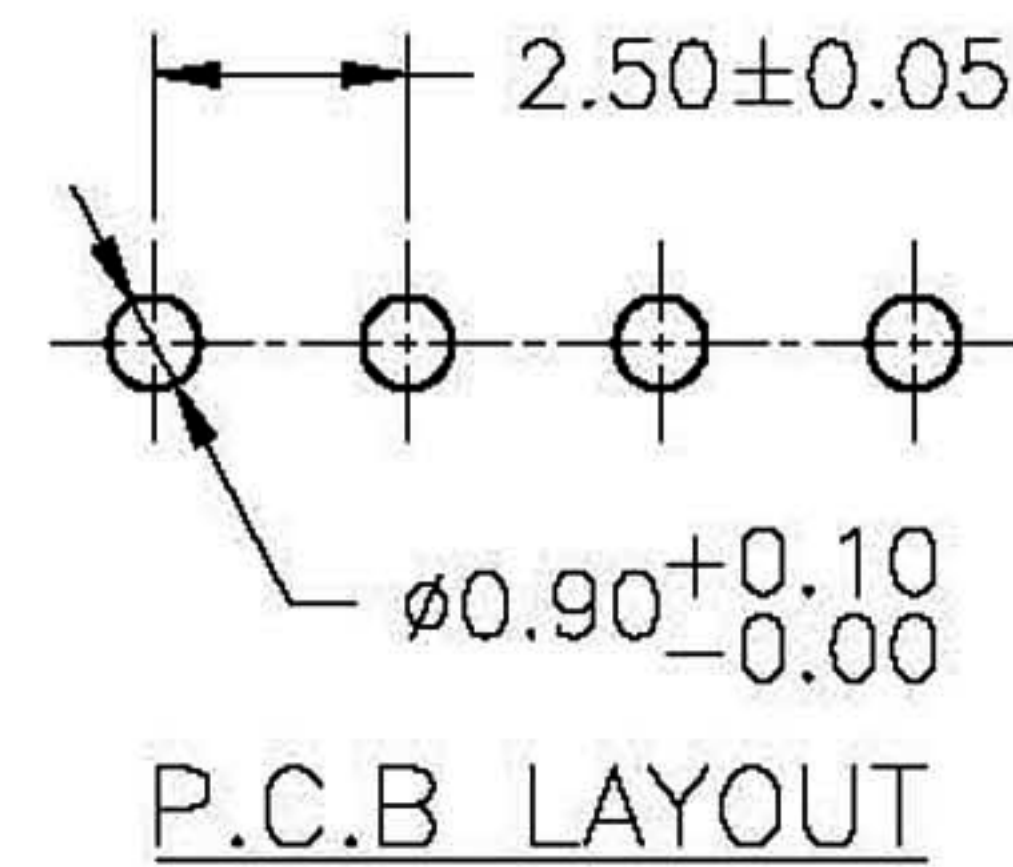
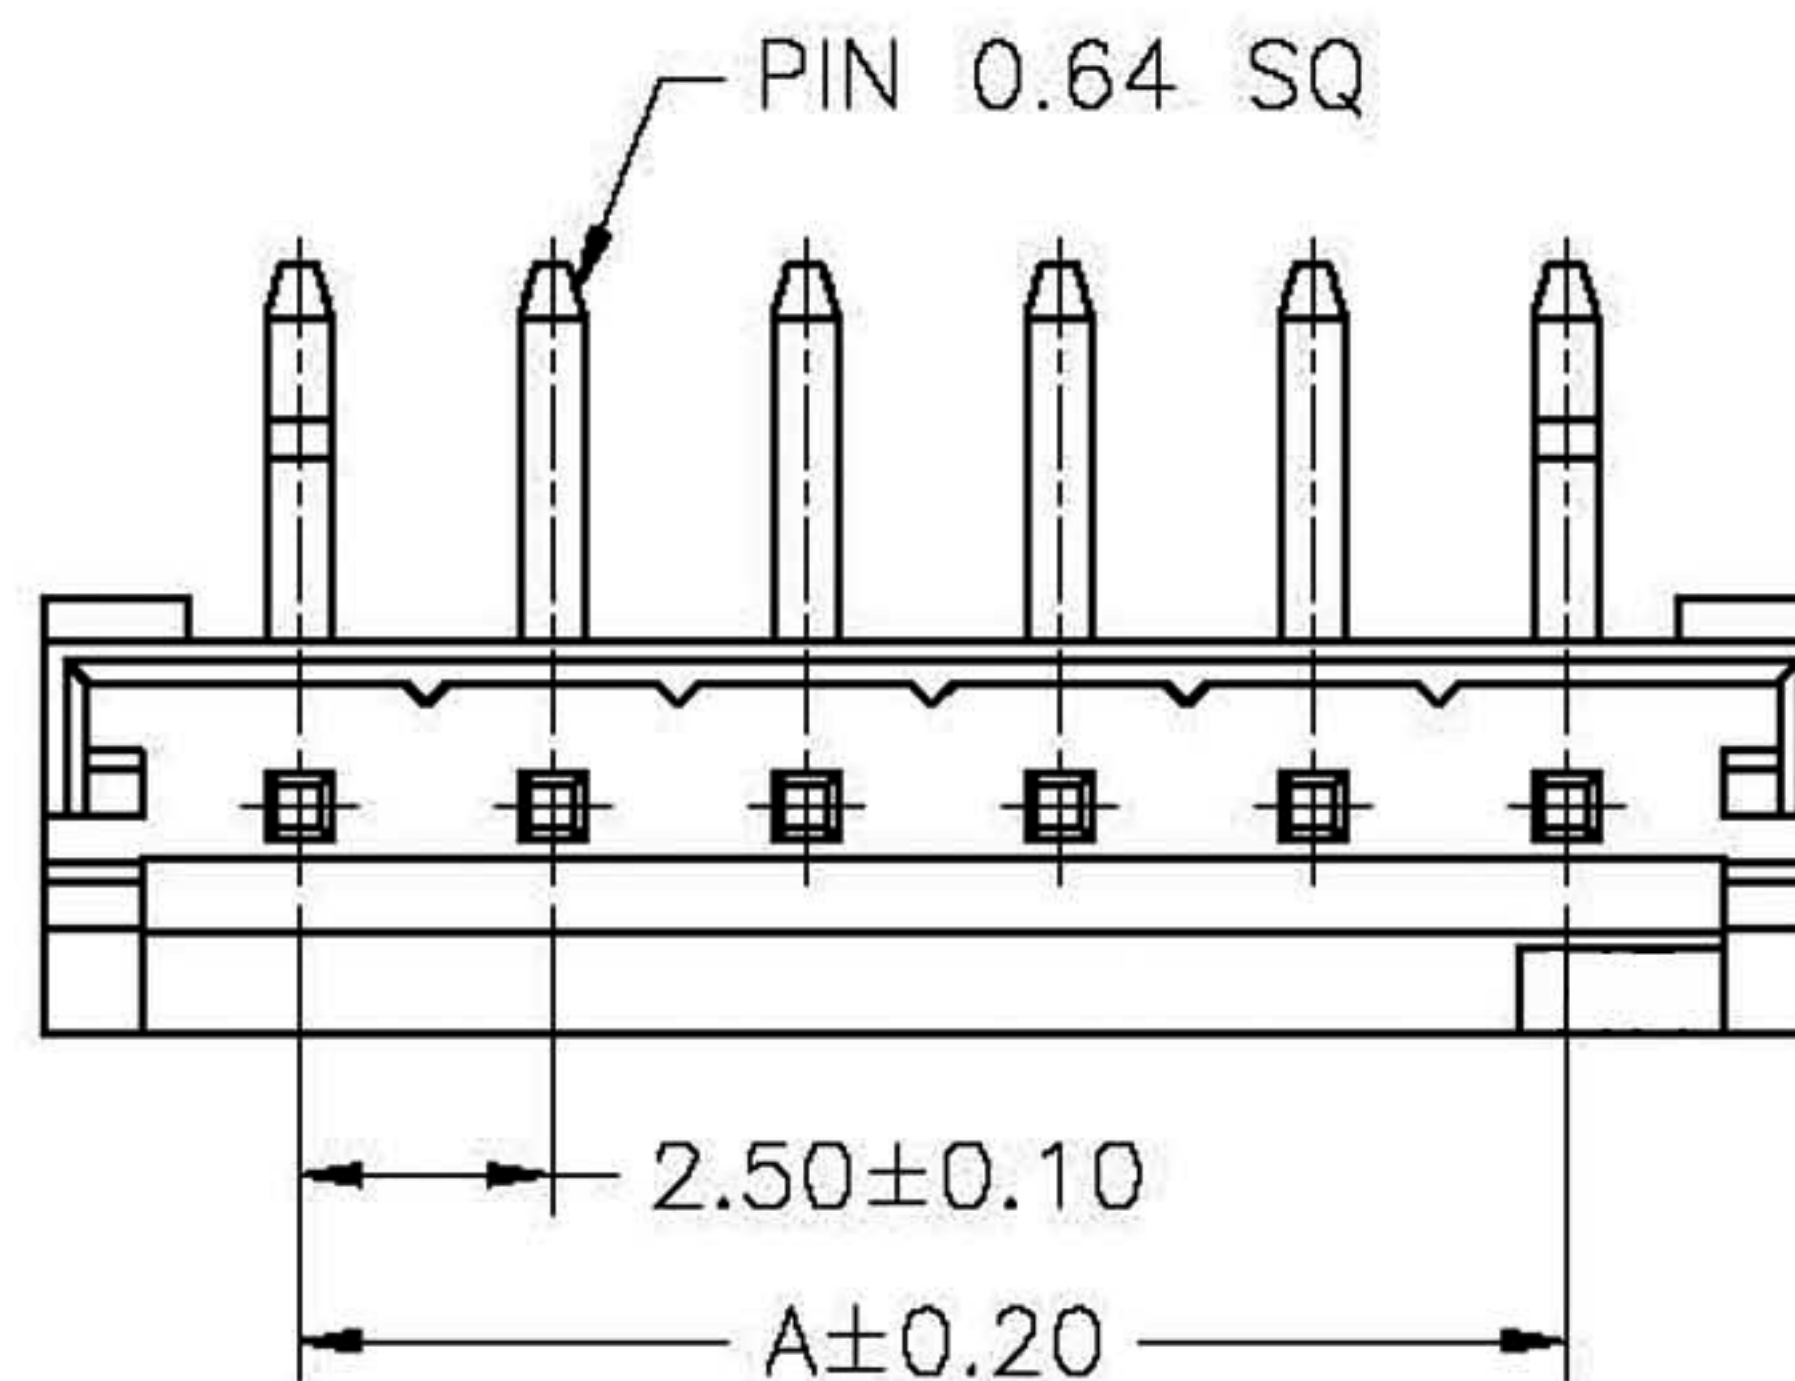


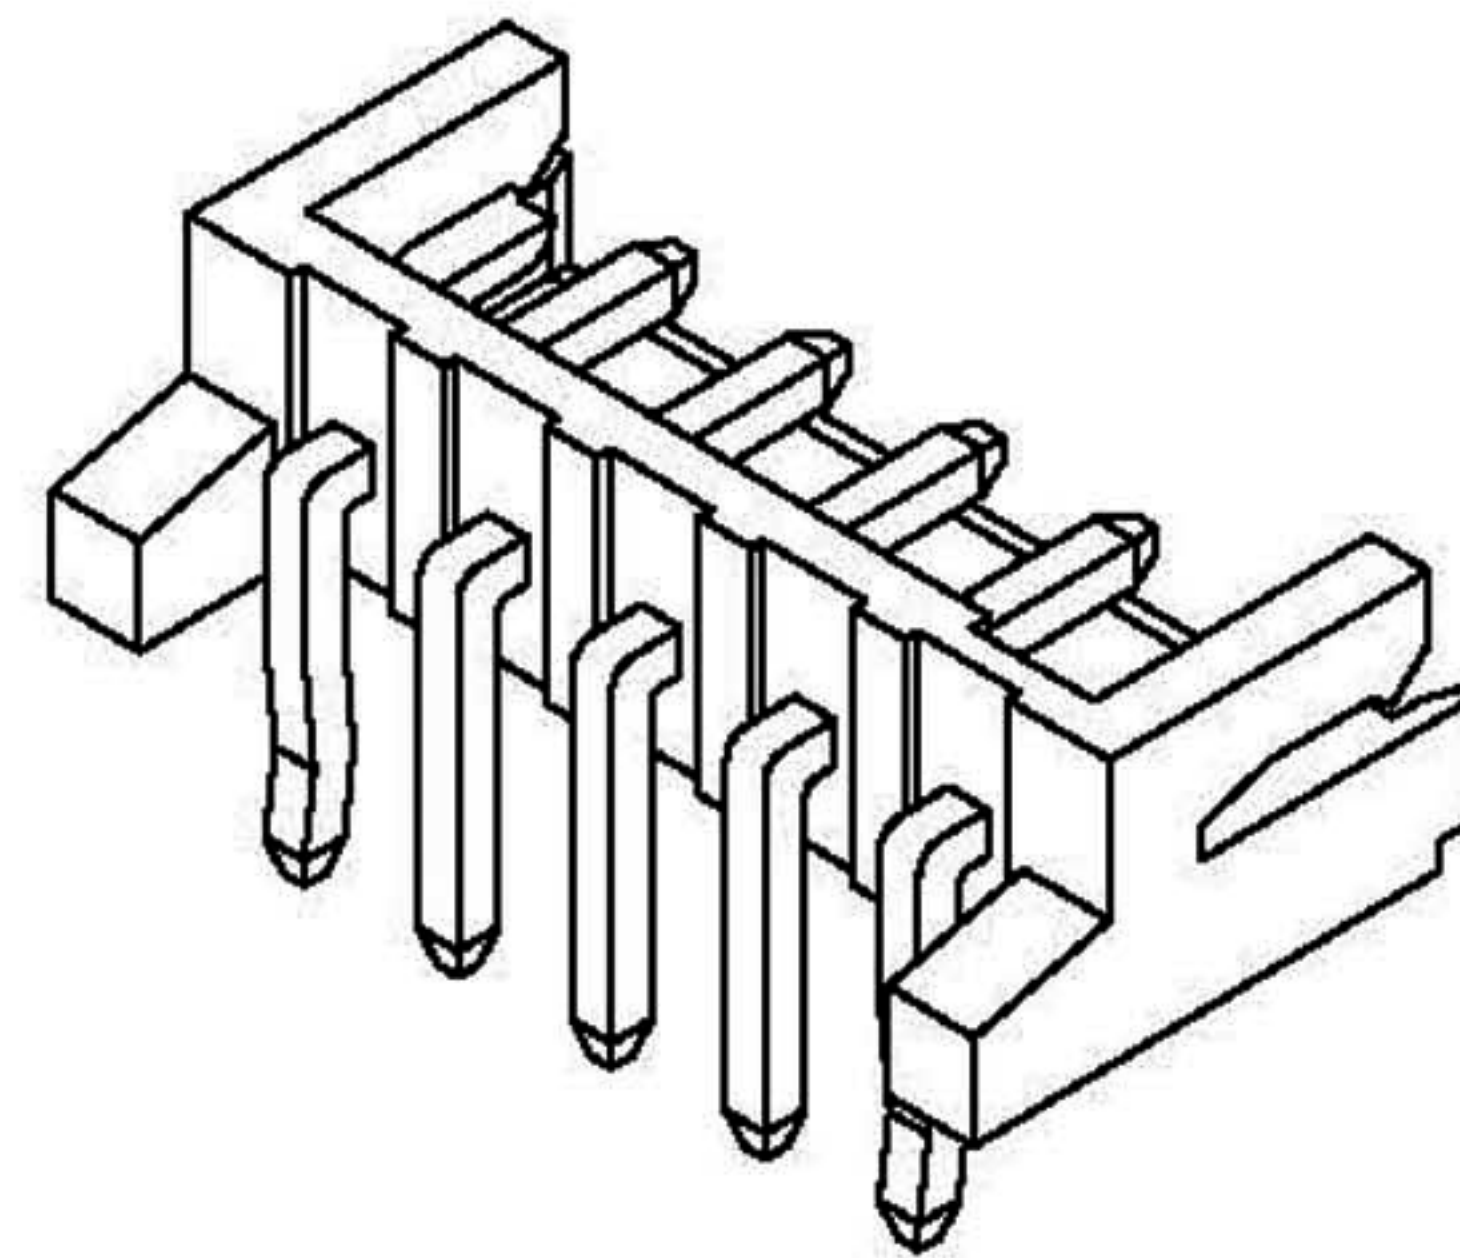

TYPE 1

SPECIFICATIONS

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 800V AC/minute

Pin Material: Brass/Tin-plated

Material: Nylon 66,UL94V-0

Color: Natural(White)

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
02	2.50	7.50
03	5.00	10.00
04	7.50	12.50
05	10.00	15.00
06	12.50	17.50
07	15.00	20.00
08	17.50	22.50
09	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.00	40.00


RoHS
Compliant

Gold Star Connectors Co., Ltd.

APPD.
核准 A-mei

DWG.
製圖 Yumi

DATE 制表日
2007/09/17

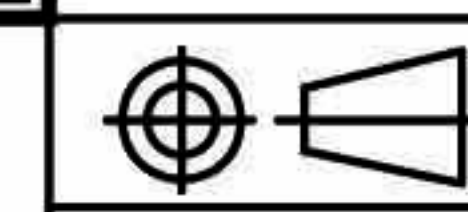

SCALE
比例 參考

UNIT
單位 M M

PAGE
張數 1 OF 1

TOLERANCE
容許公差

.0 ±0.25
.00 ±0.15
ANG. ±

SIZE.
紙張尺寸 A 4

REV.
版次 A

PART NAME 品名

WAFER (2.5mm)
RIGHT ANGLE ROHS

PART NO.

料號 MNCW-xxR