

Snubber MKP Capacitors for Pulse Applications with Double-Sided Metallized Electrodes, Schoopage Contacts and Internal Series Connection

Special Features

- Pulse duty construction
- Self-healing
- Particularly reliable contact-configurations: 4-pin versions and screwable plate connections
- Internal series connection from 400 VAC
- Very low dissipation factor
- Negative capacitance change versus temperature
- According to RoHS 2011/65/EU

Typical Applications

For high pulse and high frequency applications requiring extremely reliable contacts e.g.

- IGBT-applications

Construction


Dielectric:

Polypropylene (PP) film

Capacitor electrodes:

Double-sided metallized plastic film

Internal construction:

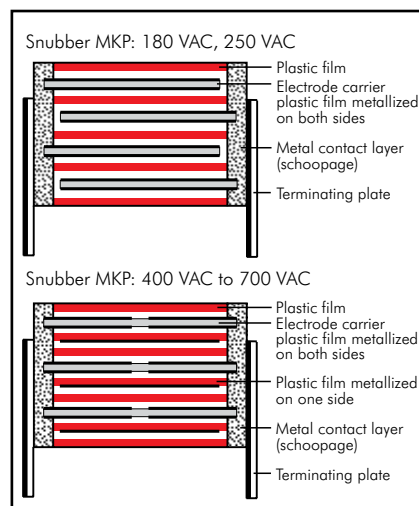

Encapsulation:

Solvent-resistant, flame-retardant plastic case with epoxy resin seal, UL 94 V-0

Terminations:

Tinned wire or plates.

Marking:

Colour: Red. Marking: Black.
Epoxy resin seal: Red

Electrical Data

Capacitance range: 0.047 μ F to 25 μ F

Rated voltages:

250 VDC, 400 VDC, 630 VDC, 1000 VDC, 1600 VDC, 2000 VDC, 3000 VDC

Capacitance tolerances:

$\pm 20\%$, $\pm 10\%$, $\pm 5\%$ (other tolerances are available subject to special enquiry)

Operating temperature range:

-55°C to $+100^{\circ}\text{C}$

Insulation resistance at $+20^{\circ}\text{C}$:

$C \leq 0.33 \mu\text{F}$: $\geq 1 \times 10^5 \text{ M}\Omega$

(mean value: $5 \times 10^5 \text{ M}\Omega$)

$C > 0.33 \mu\text{F}$: $\geq 30000 \text{ sec (M}\Omega \times \mu\text{F)}$

(mean value: 100 000 sec)

Measuring voltage: 100 V/1 min.

Test voltage: 2 sec

L	$\leq 2000 \text{ VDC}$	3000 VDC
< 41.5	$1.6 U_r$	$1.2 U_r$
41.5	$1.4 U_r$	$1.2 U_r$
56	$1.2 U_r$	$1.2 U_r$

Dissipation factors at $+20^{\circ}\text{C}$: $\tan \delta$

at f	$C \leq 0.1 \mu\text{F}$	$0.1 \mu\text{F} < C \leq 1.0 \mu\text{F}$	$C > 1.0 \mu\text{F}$
1 kHz	$\leq 3 \times 10^{-4}$	$\leq 3 \times 10^{-4}$	$\leq 3 \times 10^{-4}$
10 kHz	$\leq 4 \times 10^{-4}$	$\leq 6 \times 10^{-4}$	–
100 kHz	$\leq 15 \times 10^{-4}$	–	–

Maximum pulse rise time:

Capacitance μF	max. pulse rise time V/ μsec at $T_A < 40^{\circ}\text{C}$						
	250 VDC	400 VDC	630 VDC	1000 VDC	1600 VDC	2000 VDC	3000 VDC
0.047 ... 0.22	650	650	1150	1800	1800	1800	1800
0.33 ... 0.68	370	500	900	1150	1150	1150	1150
1.0 ... 2.2	250	250	500	500	650	650	650
2.5 ... 6.8	100	130	190	390	500	–	–
7.0 ... 10	65	90	90	–	–	–	–
15 ... 25	45	65	–	–	–	–	–

for pulses equal to the rated voltage

Mounting Recommendation

Excessive mechanical strain, e.g. pressure or shock onto the capacitor body, is to be avoided during mounting and usage of the capacitors. When fixing the plates the screw torque is to be limited to max. 5 Nm.

For further details and graphs please refer to Technical Information.

Climatic test category:

55/100/56 in accordance with IEC

Voltage derating:

A voltage derating factor of 1.35 % per K must be applied from $+85^{\circ}\text{C}$ for DC voltages and from $+75^{\circ}\text{C}$ for AC voltages

Reliability:

Operational life $> 300\,000$ hours

Failure rate $< 1 \text{ fit } (0.5 \times U_r \text{ and } 40^{\circ}\text{C})$

Specific dissipation:

Box size* WxHxL in mm	Specific dissipation in Watts per K above the ambient temperature
19x31x56	0.068
23x34x56	0.079
27x37.5x56	0.092
33x48x56	0.122
37x54x56	0.142

* other box sizes see page 11.

Packing

Packing units at the end of the catalogue.

Packing quantities may vary depending on the plate version.

Continuation

General Data

Capacitance	250 VDC/180 VAC*				400 VDC/250 VAC*				630 VDC/400 VAC*			
	W	H	L	Part number	W	H	L	Part number	W	H	L	Part number
0.1 μF					7	14	18	SNMPG031004D_____	7	16.5	26.5	SNMPJ031005D_____
0.15 "					8	15	18	SNMPG031504F_____	8.5	18.5	26.5	SNMPJ031505F_____
0.22 "	7	14	18	SNMPF032204D_____	7	16.5	26.5	SNMPG032205D_____	10.5	19	26.5	SNMPJ032205G_____
0.33 "	8	15	18	SNMPF033304F_____	8.5	18.5	26.5	SNMPG033305F_____	11	21	26.5	SNMPJ033305I_____
0.47 "	7	16.5	26.5	SNMPF034705D_____	10.5	19	26.5	SNMPG034705G_____	11	21	31.5	SNMPJ034706B_____
0.68 "	8.5	18.5	26.5	SNMPF036805F_____	11	21	31.5	SNMPG036806B_____	15	26	31.5	SNMPJ036806F_____
									13	24	41.5	SNMPJ036807C_____
1.0 μF	11	21	26.5	SNMPF041005I_____	13	24	31.5	SNMPG041006D_____	17	29	31.5	SNMPJ041006G_____
					13	24	41.5	SNMPG041007C_____	15	26	41.5	SNMPJ041007D_____
1.5 "	13	24	31.5	SNMPF041506D_____	17	29	31.5	SNMPG041506G_____	19	32	41.5	SNMPJ041507F_____
	11	22	41.5	SNMPF041507B_____	15	26	41.5	SNMPG041507D_____				
2.0 "	15	26	31.5	SNMPF042006F_____	17	29	41.5	SNMPG042007E_____	20	39.5	41.5	SNMPJ042007G_____
	13	24	41.5	SNMPF042007C_____								
2.2 "	15	26	31.5	SNMPF042206F_____	17	29	41.5	SNMPG042207E_____	20	39.5	41.5	SNMPJ042207G_____
	13	24	41.5	SNMPF042207C_____								
2.5 "	17	29	31.5	SNMPF042506G_____	19	32	41.5	SNMPG042507F_____	24	45.5	41.5	SNMPJ042507H_____
	15	26	41.5	SNMPF042507D_____								
3.0 "	17	34.5	31.5	SNMPF043006I_____	20	39.5	41.5	SNMPG043007G_____	24	45.5	41.5	SNMPJ043007H_____
	15	26	41.5	SNMPF043007D_____								
3.3 "	17	34.5	31.5	SNMPF043306I_____	20	39.5	41.5	SNMPG043307G_____	24	45.5	41.5	SNMPJ043307H_____
	15	26	41.5	SNMPF043307D_____								
4.0 "	19	32	41.5	SNMPF044007F_____	24	45.5	41.5	SNMPG044007H_____	31	46	41.5	SNMPJ044007I_____
4.7 "	19	32	41.5	SNMPF044707F_____	24	45.5	41.5	SNMPG044707H_____	31	46	41.5	SNMPJ044707I_____
5.0 "	20	39.5	41.5	SNMPF045007G_____	24	45.5	41.5	SNMPG045007H_____	31	46	41.5	SNMPJ045007I_____
6.0 "	20	39.5	41.5	SNMPF046007G_____	31	46	41.5	SNMPG046007I_____	35	50	41.5	SNMPJ046007J_____
									33	48	56	SNMPJ046008J_____
6.8 "									40	55	41.5	SNMPJ046807K_____
7.0 "	24	45.5	41.5	SNMPF047007H_____	31	46	41.5	SNMPG047007I_____	33	48	56	SNMPJ047008J_____
8.0 "	24	45.5	41.5	SNMPF048007H_____	33	48	56	SNMPG048008J_____	37	54	56	SNMPJ048008L_____
10.0 μF	31	46	41.5	SNMPF051007I_____	35	50	41.5	SNMPG051007J_____				
					33	48	56	SNMPG051008J_____				
15.0 "	35	50	41.5	SNMPF051507J_____	40	55	41.5	SNMPG051507K_____				
	33	48	56	SNMPF051508J_____	37	54	56	SNMPG051508L_____				
20.0 "	37	54	56	SNMPF052008L_____								
25.0 "	37	54	56	SNMPF052508L_____								

* AC voltage: $f \leq 1000 \text{ Hz}$; $1.4 \times U_{\text{rms}} + U_{\text{DC}} \leq U_r$

Dims in mm.

Ionisation inception level in isolated cases may be lower than admissible rated AC voltage.

Versions and dimensional drawings see page 105.

Part number completion:

Version codes see page 108.

Tolerance: 20 % = M

10 % = K

5 % = J

Packing: bulk = S

Pin length: 6-2 = SD

none = 00 (for plate versions)

Rights reserved to amend design data without prior notification.

Continuation page 100

Continuation

General Data

Capacitance	1000 VDC/600 VAC*				1600 VDC/650 VAC*			
	W	H	L	Part number	W	H	L	Part number
0.068 µF	7	16.5	26.5	SNMPO126805D_____	10.5	19	26.5	SNMPT026805G_____
0.1 µF	8.5	18.5	26.5	SNMPO131005F_____	11	21	26.5	SNMPT031005I_____
0.15 "	11	21	26.5	SNMPO131505I_____	13	24	31.5	SNMPT031506D_____
					11	22	41.5	SNMPT031507B_____
0.22 "	11	21	31.5	SNMPO132206B_____	15	26	31.5	SNMPT032206F_____
					13	24	41.5	SNMPT032207C_____
0.33 "	15	26	31.5	SNMPO133306F_____	17	34.5	31.5	SNMPT033306I_____
	13	24	41.5	SNMPO133307C_____	15	26	41.5	SNMPT033307D_____
0.47 "	17	29	31.5	SNMPO134706G_____	19	32	41.5	SNMPT034707F_____
	15	26	41.5	SNMPO134707D_____				
0.68 "	17	29	41.5	SNMPO136807E_____	20	39.5	41.5	SNMPT036807G_____
1.0 µF	20	39.5	41.5	SNMPO141007G_____	24	45.5	41.5	SNMPT041007H_____
	23	34	56	SNMPO141008E_____				
1.5 "	24	45.5	41.5	SNMPO141507H_____	31	46	41.5	SNMPT041507I_____
	23	34	56	SNMPO141508E_____				
2.0 "	31	46	41.5	SNMPO142007I_____	40	55	41.5	SNMPT042007K_____
	27	37.5	56	SNMPO142008H_____	33	48	56	SNMPT042008J_____
2.2 "	31	46	41.5	SNMPO142207I_____	40	55	41.5	SNMPT042207K_____
	27	37.5	56	SNMPO142208H_____	33	48	56	SNMPT042208J_____
2.5 "	35	50	41.5	SNMPO142507J_____	37	54	56	SNMPT042508L_____
	33	48	56	SNMPO142508J_____				
3.0 "	40	55	41.5	SNMPO143007K_____	37	54	56	SNMPT043008L_____
	33	48	56	SNMPO143008J_____				
3.3 "	40	55	41.5	SNMPO143307K_____				
	33	48	56	SNMPO143308J_____				
4.0 "	37	54	56	SNMPO144008L_____				
4.7 "	37	54	56	SNMPO144708L_____				
5.0 "	37	54	56	SNMPO145008L_____				

* AC voltage: $f \leq 1000 \text{ Hz}$; $1.4 \times U_{\text{rms}} + U_{\text{DC}} \leq U_r$

Dims. in mm.

Ionisation inception level in isolated cases may be lower than admissible rated AC voltage.

Versions and dimensional drawings see page 105.

Part number completion:

Version codes see page 108.

Tolerance: 20 % = M

10 % = K

5 % = J

Packing: bulk = S

Pin length: 6-2 = SD

none = 00 (for plate versions)

Rights reserved to amend design data without prior notification.

Continuation page 101

Continuation

General Data

Capacitance	2000 VDC/700 VAC*				3000 VDC/700 VAC*			
	W	H	L	Part number	W	H	L	Part number
0.047 μF	10.5	19	26.5	SNMPU024705G_____	11	21	31.5	SNMPW024706B_____
0.068 "	11	21	26.5	SNMPU026805I_____	13	24	31.5	SNMPW026806D_____
					11	22	41.5	SNMPW026807B_____
0.1 μF	13	24	31.5	SNMPU031006D_____	15	26	31.5	SNMPW031006F_____
	11	22	41.5	SNMPU031007B_____	13	24	41.5	SNMPW031007C_____
0.15 "	15	26	31.5	SNMPU031506F_____	15	26	41.5	SNMPW031507D_____
	13	24	41.5	SNMPU031507C_____				
0.22 "	17	34.5	31.5	SNMPU032206I_____	19	32	41.5	SNMPW032207F_____
	15	26	41.5	SNMPU032207D_____				
0.33 "	19	32	41.5	SNMPU033307F_____				
0.47 "	20	39.5	41.5	SNMPU034707G_____	24	45.5	41.5	SNMPW033307H_____
					19	31	56	SNMPW033308D_____
0.68 "	24	45.5	41.5	SNMPU036807H_____	31	46	41.5	SNMPW034707I_____
					27	37.5	56	SNMPW034708H_____
					35	50	41.5	SNMPW036807J_____
					33	48	56	SNMPW036808J_____
1.0 μF	35	50	41.5	SNMPU041007J_____	40	55	41.5	SNMPW041007K_____
	33	48	56	SNMPU041008J_____	33	48	56	SNMPW041008J_____
1.5 "	40	55	41.5	SNMPU041507K_____	37	54	56	SNMPW041508L_____
	33	48	56	SNMPU041508J_____				
2.0 "	37	54	56	SNMPU042008L_____				

* AC voltage: $f \leq 1000 \text{ Hz}$; $1.4 \times U_{\text{rms}} + U_{\text{DC}} \leq U_{\text{r}}$

Dims. in mm.

Ionisation inception level in isolated cases may be lower than admissible rated AC voltage.

Versions and dimensional drawings see page 105.

Part number completion:

Version codes see page 108.

Tolerance: 20 % = M

10 % = K

5 % = J







Packing: bulk = S


Pin length: 6-2 = SD

none = 00 (for plate versions)


Rights reserved to amend design data without prior notification.

Permissible AC voltage in relation to frequency at 10° C internal temperature rise (general guide).

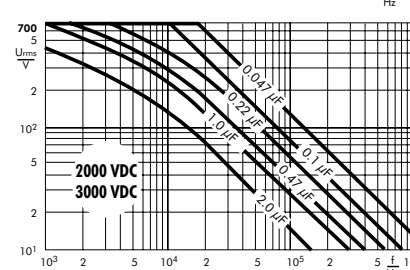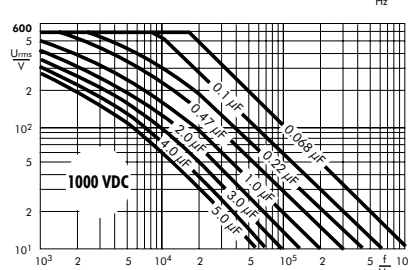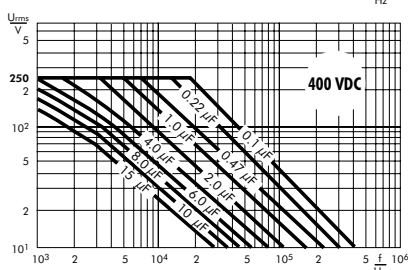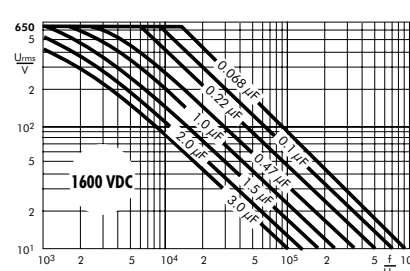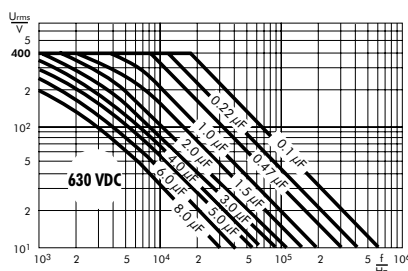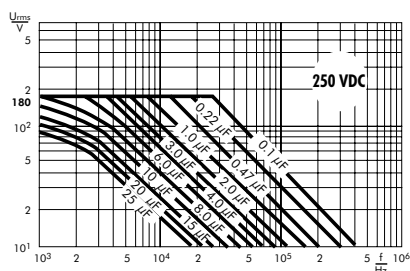


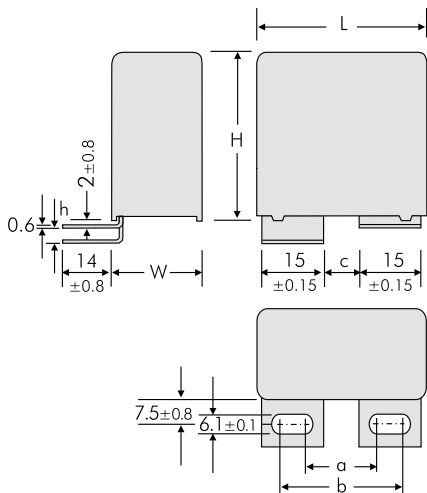


Version	L	a ±0.5	b ±0.5	c ±0.5	h ±0.8
A1	41.5	17.5	27.5	7.5	0
A1.5	41.5	17.5	27.5	7.5	3.5
A1	56	20	30	10	0
A1.1.1	56	28	38	18	0
A1.4	56	20	30	10	3.5
A1.4.1	56	28	38	18	3.5

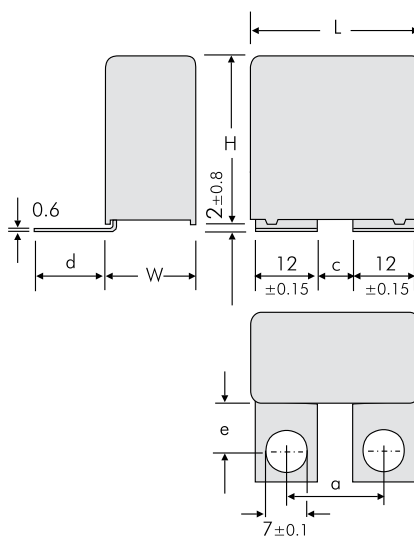


Version	L	a ±0.5	c ±0.5	d ±0.8	e ±0.8
A1.6	41.5	18	6	21.5	16
A1.6.1	41.5	22	10	18.5	13
A1.6	56	29	17	21.5	16

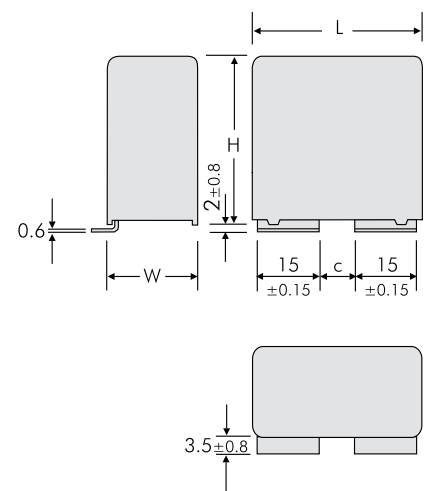


Version	L	c ±0.5
A1.7	41.5	7.5
A1.7	56	10
A1.7.1	56	18

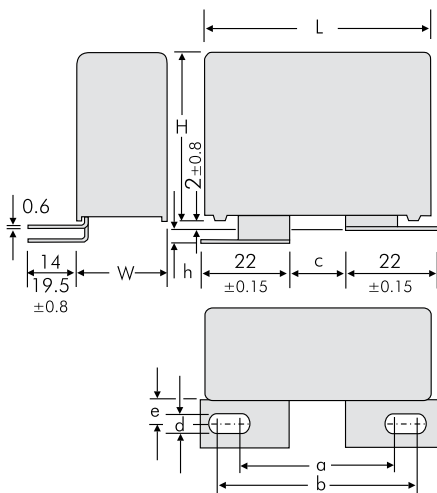

Version	L	a ±0.5	b ±0.5	c ±0.5	d ±0.1	e ±0.8	h ±0.8
A2	41.5	40.5	46.5	14.5	8.4	7.5	0
A2.2	41.5	31	37	5	8.4	7.5	3.5
A2.3	41.5	31	37	5	8.4	13	3.5
A2.4	41.5	33.5	39.5	7.5	8.4	13	3.5
A2.4.1	41.5	33.5	39.5	7.5	8.4	13	0
A2.5	41.5	29.5	39.5	5.5	6.1	7.5	3.5
A2.6	41.5	31.5	41.5	7.5	6.1	13	3.5
A2.6.1	41.5	31.5	41.5	14	6.1	13	3.5
A2.6.2	41.5	31.5	41.5	14	6.1	13	0
A2.8	41.5	40.5	46.5	14.5	8.4	7.5	3.5
A2.1	56	39.5	45.5	13.5	8.4	7.5	0
A2.1.1	56	36	45.5	13.5	8.4	7.5	0
A2.7	56	39.5	45.5	13.5	8.4	7.5	3.5

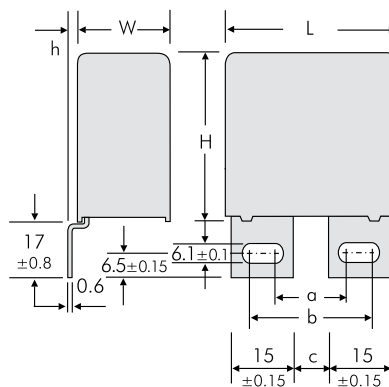


Version	L	a ±0.5	b ±0.5	c ±0.5	h ±0.8
A3	41.5	17.5	27.5	7.5	0
A3.5	41.5	17.5	27.5	7.5	3
A3	56	20	30	10	0
A3.1	56	28	38	18	0
A3.5	56	20	30	10	3
A3.10	56	28	38	18	3

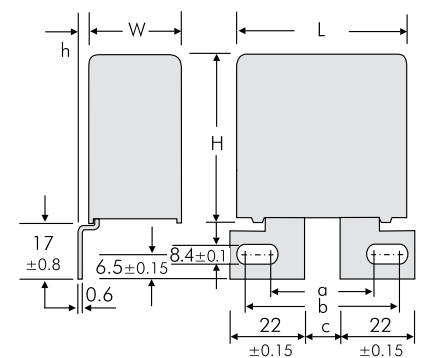


Version	L	a ±0.5	b ±0.5	c ±0.5	h ±0.8
A3.9	41.5	40.5	46.5	14.5	0
A3.11	41.5	40.5	46.5	14.5	3
A3.2	56	40.5	46.5	14.5	0
A3.3	56	40.5	46.5	14.5	3


Versions of WIMA Snubber Capacitors

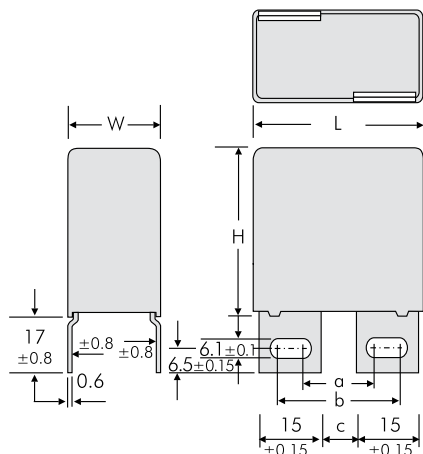


Version	L	a ±0.5	b ±0.5	c ±0.5
A3.6	41.5	17.5	27.5	7.5
A3.7	56	20	30	10

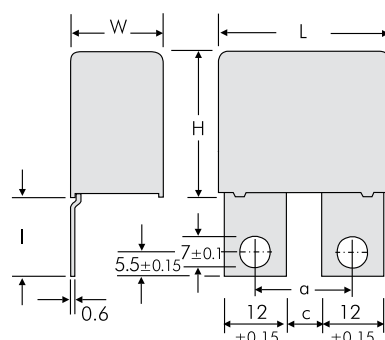


Version	L	a ±0.5	c ±0.5	l ±0.8
A3.8	41.5 W ≥ 17	18	6	23
A3.8.1	41.5 W ≥ 17	22	10	17.5

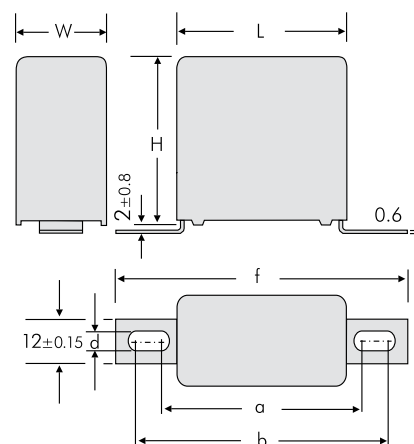

Version	L	a ±0.8	b ±0.8	f ±0.8	d ±0.1
A4.9	31.5 W ≥ 15	44	47	57	4.5
A4.10	31.5 W ≥ 15	43	59	69	6.1
A4.2	41.5 W ≥ 15	54	57	67	4.5
A4	41.5 W ≥ 15	53	69	79	6.1
A4.7	56	65	68	78	4.5
A4	56	64	80	90	6.1

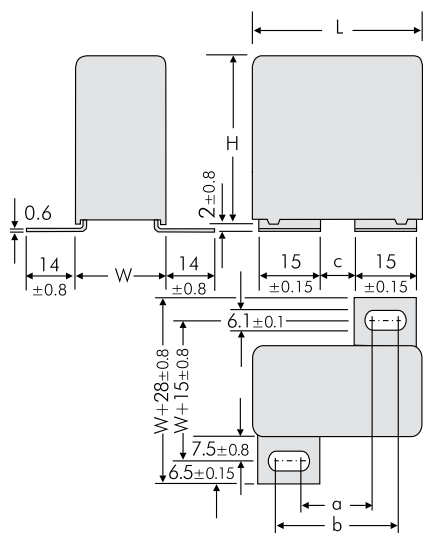


Version	L	a ±0.5	b ±0.5	c ±0.5
A5	41.5	17.5	27.5	7.5
A5	56	20	30	10

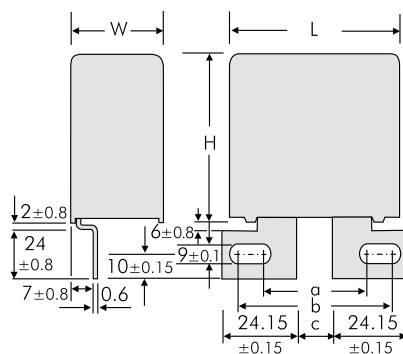


Version	L	a ±0.5	b ±0.5	c ±0.5
A6	56 W ≥ 23	41.5	45.5	15.5

Version FS 6.3
with slip-on
terminals
according to
DIN 46244

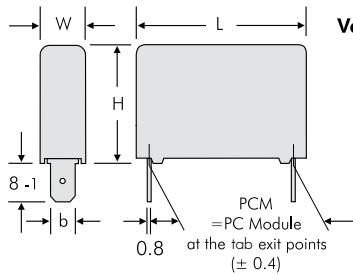

L	W	PCM	b ±0.15
26.5	≥ 11	23.5	6.3
31.5	≥ 11	28.5	6.3
41.5	≥ 11	38.5	6.3
56	≥ 11	49.5	6.3


Version B*



L	PCM	b ±0.15
18	16	5
26.5	23.5	5
31.5	28.5	8
41.5	38.5	8
56	49.5	8


* Processing notification:
Processing should be done within
3 month after manufacturing.

**2-pin
version**

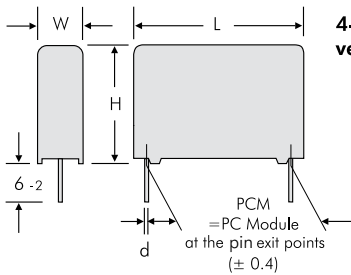

PCM	d
15	0.8
22.5	0.8
27.5	0.8
38.5	1.2
49.5	1.2

**4-pin
version**



W	H	L	PCM	b	d
10.5	19	26.5	22.5	5	0.8
10.5	20.5	26.5	22.5	5	0.8
11	21	26.5	22.5	5	0.8
11	21	31.5	27.5	5	0.8
13	24	31.5	27.5	7.5	0.8
15	26	31.5	27.5	7.5	0.8
17	29	31.5	27.5	10	0.8
17	34.5	31.5	27.5	10	0.8
20	39.5	31.5	27.5	12.5	0.8
22	43.5	31.5	27.5	12.5	0.8
11	22	41.5	37.5	5	1
13	24	41.5	37.5	7.5	1
15	26	41.5	37.5	7.5	1
17	29	41.5	37.5	10	1
19	32	41.5	37.5	10	1
20	39.5	41.5	37.5	12.5	1
24	45.5	41.5	37.5	12.5	1
31	46	41.5	37.5	20	1
19	31	56	48.5	12.5	1
23	34	56	48.5	15	1
27	37.5	56	48.5	15	1
33	48	56	48.5	20	1
37	54	56	48.5	20	1

Dims. in mm.

Additional special versions can be
realized. Please contact us with your
specific needs.

[illegible]

Version code		4A	4C	4J	4L		5A	6A	F5
W x H x L	Size code	A4	A4.2	A4.7	A4.9	A4.10	A5	A6	F5 63
11 x 21 x 26.5	5I								
11 x 21 x 31.5	6B								
13 x 24 x 31.5	6D								
15 x 26 x 31.5	6F								
17 x 29 x 31.5	6G								
17 x 34.5 x 31.5	6I								
11 x 22 x 41.5	7B								
13 x 24 x 41.5	7C								
15 x 26 x 41.5	7D								
17 x 29 x 41.5	7E								
19 x 32 x 41.5	7F								
20 x 39.5 x 41.5	7G								
24 x 45.5 x 41.5	7H								
31 x 46 x 41.5	7I								
19 x 31 x 56	8D								
23 x 34 x 56	8E								
27 x 37.5 x 56	8H								
33 x 48 x 56	8J								
37 x 54 x 56	8L								

Possible connecting respective plate versions - depending on box size.

- * Processing notification:
Processing should be done within
3 month after manufacturing.

Recommendation for Processing and Application of Through-Hole Capacitors

Soldering Process

Internal temperature of the capacitor must be kept as follows:

Polyester: preheating: $T_{\max.} \leq 125^{\circ}\text{C}$
soldering: $T_{\max.} \leq 135^{\circ}\text{C}$

Polypropylene: preheating: $T_{\max.} \leq 100^{\circ}\text{C}$
soldering: $T_{\max.} \leq 110^{\circ}\text{C}$

Single wave soldering

Soldering bath temperature: $T < 260^{\circ}\text{C}$


Dwell time: $t < 5\text{ sec}$

Double wave soldering

Soldering bath temperature: $T < 260^{\circ}\text{C}$

Dwell time: $\Sigma t < 5\text{ sec}$

Due to different soldering processes and heat requirements the graphs are to be regarded as a recommendation only.

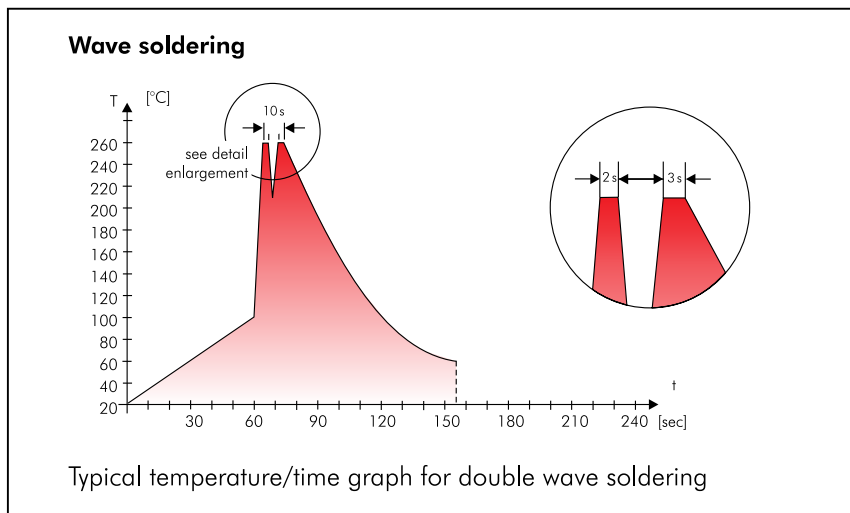

WIMA Quality and Environmental Philosophy

ISO 9001:2008 Certification

ISO 9001:2008 is an international basic standard of quality assurance systems for all branches of industry. The approval according to ISO 9001:2008 of our factories by the VDE inspectorate certifies that organisation, equipment and monitoring of quality assurance in our factories correspond to internationally recognized standards.

WIMA WPCS

The WIMA Process Control System (WPCS) is a quality surveillance and optimization system developed by WIMA. WPCS is a major part of the quality-oriented WIMA production. Points of application of WPCS during production process:

- incoming material inspection
- metallization
- film inspection
- schoopage
- pre-healing
- pin attachment
- cast resin preparation/encapsulation
- 100% final inspection
- Testing as per customer requirements

WIMA Environmental Policy

All WIMA capacitors, irrespective of whether through-hole devices or SMD, are made of environmentally friendly materials. Neither during manufacture nor in the product itself any toxic substances are used, e.g.

- | | |
|------------------------|------------|
| – Lead | – PBB/PBDE |
| – PCB | – Arsenic |
| – CFC | – Cadmium |
| – Hydrocarbon chloride | – Mercury |
| – Chromium 6+ | – etc. |

We merely use pure, recyclable materials for packing our components, such as:

- carton
- cardboard
- adhesive tape made of paper
- polystyrene

We almost completely refrain from using packing materials such as:

- foamed polystyrene (Styropor®)
- adhesive tapes made of plastic
- metal clips

RoHS Compliance

According to the RoHS Directive 2011/65/EU certain hazardous substances like e.g. lead, cadmium, mercury must not be used any longer in electronic equipment as of July 1st, 2006. For the sake of the environment WIMA has refrained from using such substances since years already.



WIMA Kondensatoren sind bleifrei
konform RoHS 2011/65/EU

WIMA capacitors are lead free
in accordance with RoHS 2011/65/EU

Tape for lead-free WIMA capacitors

DIN EN ISO 14001:2004

WIMA's environmental management has been established in accordance with the guidelines of DIN EN ISO 14001:2004 to optimize the production processes with regard to energy and resources.

Typical Dimensions for Taping Configuration

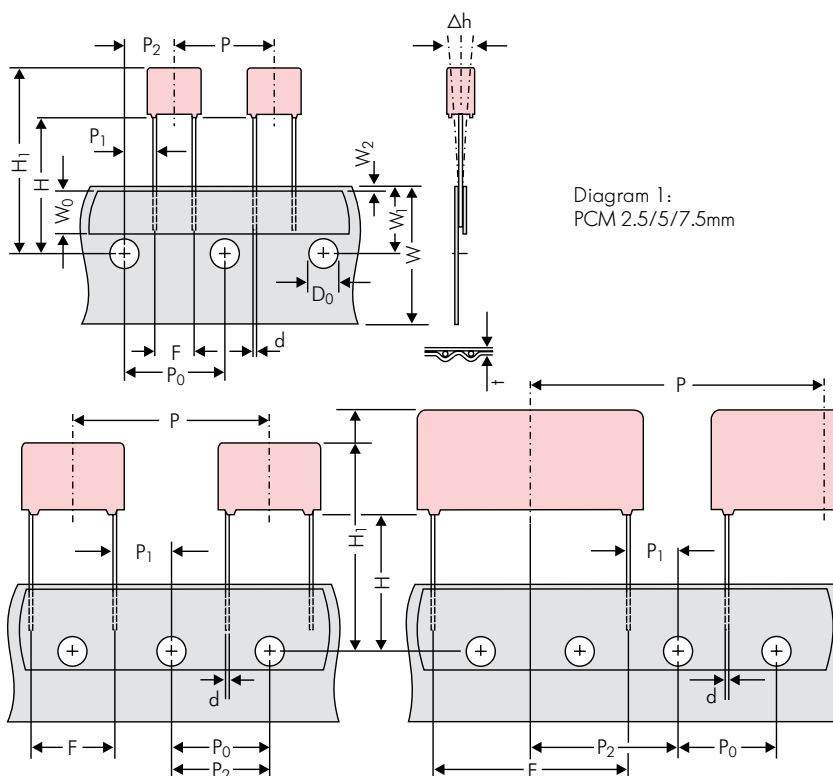


Diagram 2: PCM 10/15 mm

Diagram 3: PCM 22.5 and 27.5*mm

*PCM 27.5 tapping possible with two feed holes between components

Dimensions for Radial Taping								
Designation	Symbol	PCM 2.5 taping	PCM 5 taping	PCM 7.5 taping	PCM 10 taping*	PCM 15 taping*	PCM 22.5 taping	PCM 27.5 taping
Carrier tape width	W	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5
Hold-down tape width	W ₀	6.0 for hot-sealing adhesive tape	6.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape
Hole position	W ₁	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5
Hold-down tape position	W ₂	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.
Feed hole diameter	D ₀	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2
Pitch of component	P	12.7 ±1.0	12.7 ±1.0	12.7 ±1.0	25.4 ±1.0	25.4 ±1.0	38.1 ±1.5	38.1 ±1.5 or 50.8 ±1.5
Feed hole pitch	P ₀	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch
Feed hole centre to pin	P ₁	5.1 ±0.5	3.85 ±0.7	2.6 ±0.7	7.7 ±0.7	5.2 ±0.7	7.8 ±0.7	5.3 ±0.7
Hole centre to component centre	P ₂	6.35 ±1.3	6.35 ±1.3	6.35 ±1.3	12.7 ±1.3	12.7 ±1.3	19.05 ±1.3	19.05 ±1.3
Feed hole centre to bottom edge of the component	H	16.5 ±0.3	16.5 ±0.3	16.5 ±0.5	16.5 ±0.5	16.5 ±0.5	16.5 ±0.5	16.5 ±0.5
		18.5 ±0.5	18.5 ±0.5	18.5 ±0.5	18.5 ±0.5	18.5 ±0.5	18.5 ±0.5	18.5 ±0.5
Feed hole centre to top edge of the component	H ₁	H+H _{component} < H ₁ 32.25 max.	H+H _{component} < H ₁ 32.25 max.	H+H _{component} < H ₁ 24.5 to 31.5	H+H _{component} < H ₁ 25.0 to 31.5	H+H _{component} < H ₁ 26.0 to 37.0	H+H _{component} < H ₁ 30.0 to 43.0	H+H _{component} < H ₁ 35.0 to 45.0
Pin spacing at upper edge of carrier tape	F	2.5 ±0.5	5.0 ^{+0.8} _{-0.2}	7.5 ±0.8	10.0 ±0.8	15 ±0.8	22.5 ±0.8	27.5 ±0.8
Pin diameter	d	0.4 ±0.05	0.5 ±0.05	*0.5 ±0.05 or 0.6 ^{+0.06} _{-0.05}	*0.5 ±0.05 or 0.6 ^{+0.06} _{-0.05}	0.8 ^{+0.08} _{-0.05}	0.8 ^{+0.08} _{-0.05}	0.8 ^{+0.08} _{-0.05}
Component alignment	Δh	± 2.0 max.	± 2.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.
Total tape thickness	t	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2
Package (see also page 141)		ROLL/AMMO			AMMO			
		REEL ø 360 max. ø 30 ±1	B 52 ±2 B 58 ±2 } depending on comp. dimensions	REEL ø 360 max. ø 30 ±1 B 58 ±2 or 66 ±2 REEL ø 500 max. ø 25 ±1 B 60 ±2 or 68 ±2 } depending on PCM and component dimensions				
Unit		see details page 142.						

Dims in mm.

* Diameter of pins see General Data.


Please clarify customer-specific deviations with the manufacturer.

* PCM 10 and PCM 15 can be crimped to PCM 7.5.


Position of components according to PCM 7.5 (sketch 11). P₀ = 12.7 or 15.0 is possible

Types of Tape Packaging of Capacitors for Automatic Radial Insertion


■ ROLL Packaging

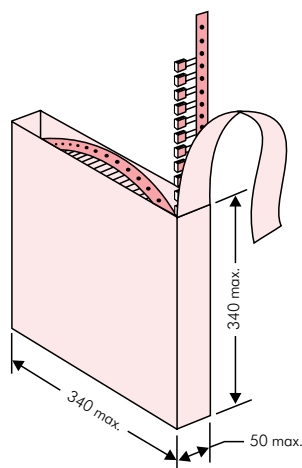

■ AMMO Packaging

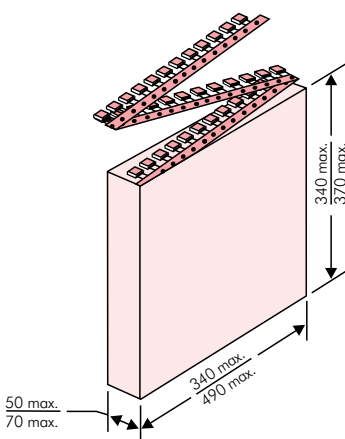

■ REEL Packaging

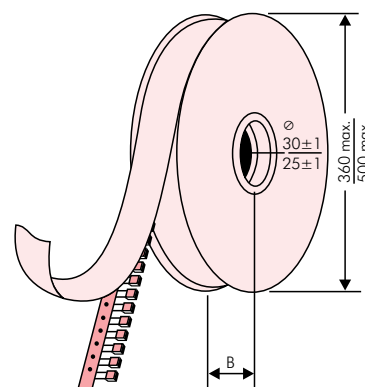

BAR CODE (Labelling)

Labelling of package units in plain text and with alphanumerical Bar Code

Scanner decoding of

- WIMA supplier number
- Customer's P/O number
- Customer's part number
- WIMA confirmation number
- WIMA part number
- Lot number
- Date code
- Quantity

In addition part description of

- article
- capacitance value
- rated voltage
- dimensions
- capacitance tolerance
- packing

as well as gross weight and customer's name are indicated in plain text.

WIMA Best Capacitors Made in Germany		Werk Unna	
Supplier-ID: 123456789	RoHS 2011/65/EU	Date Code: 08.10.10	
Purchase Order No. (P/O): Bestellung xyz		Quantity: 5.000	
Customer Part No.: KUNDETEILENUMMER		Customer No.: 0000100002	
WIMA Confirmation No.: 0001004063000100		Gross Weight [g]: 1870	
WIMA Part No.: MKS2C034701C00K88D			
Handling Unit:	MKS 2	QTY: 5.000	COO: DE
	MKS 2 0.47 μ F 63 VDC 3.5x8.5x7.2 RMS		
	Standard 10% Loss - Standard Drähte 6-2		
1000067326	Vorlage Debitur Inland	Week 03/2011	

BARCODE „Code 39“



Packing Quantities for Capacitors with Radial Pins in PCM 2.5 mm to 22.5 mm

PCM	Size				bulk	pcs. per packing unit									
						ROLL		REEL				AMMO			
	W	H	L	Codes		S	H16.5	H18.5	ø 360	ø 500	340 × 340		490 × 370		
						N	O	F	I	H	J	A	C	B	D
2.5 mm	2.5	7	4.6	0B	5000		2200		2500		–		2800		–
	3	7.5	4.6	0C	5000		2000		2300		–		2300		–
	3.8	8.5	4.6	0D	5000		1500		1800		–		1800		–
	4.6	9	4.6	0E	5000		1200		1500		–		1500		–
	5.5	10	4.6	0F	5000		900		1200		–		1200		–
5 mm	2.5	6.5	7.2	1A	5000		2200		2500		–		2800		–
	3	7.5	7.2	1B	5000		2000		2300		–		2300		–
	3.5	8.5	7.2	1C	5000		1600		2000		–		2000		–
	4.5	6	7.2	1D	6000		1300		1500		–		1500		–
	4.5	9.5	7.2	1E	4000		1300		1500		–		1500		–
	5	10	7.2	1F	3500		1100		1400		–		1400		–
	5.5	7	7.2	1G	4000		1000		1200		–		1200		–
	5.5	11.5	7.2	1H	2500		1000		1200		–		1200		–
	6.5	8	7.2	1I	2500		800		1000		–		1000		–
	7.2	8.5	7.2	1J	2500		700		1000		–		1000		–
	7.2	13	7.2	1K	2000		700		950		–		1000		–
	8.5	10	7.2	1L	2000		600		800		–		800		–
	8.5	14	7.2	1M	1500		600		800		–		800		–
11	16	7.2	1N	1000		500		600		–		400		–	
7.5 mm	2.5	7	10	2A	5000		–		2500		4400		2500		–
	3	8.5	10	2B	5000		–		2200		4300		2300		4150
	4	9	10	2C	4000		–		1700		3200		1700		3100
	4.5	9.5	10.3	2D	3500		–		1500		2900		1400		2800
	5	10.5	10.3	2E	3000		–		1300		2500		1300		–
	5.7	12.5	10.3	2F	2000		–		1000		2200		1100		–
	7.2	12.5	10.3	2G	1500		–		900		1800		1000		–
10 mm	3	9	13	3A	3000		–		1100		2200		–		1900
	4	8.5	13.5	FA	3000		–		900		1600		–		1450
	4	9	13	3C	3000		–		900		1600		–		1450
	4	9.5	13	3D	3000		–		900		1600		–		1400
	5	10	13.5	FB	2000		–		700		1300		–		1200
	5	11	13	3F	3000		–		700		1300		–		1200
	6	12	13	3G	2400		–		550		1100		–		1000
	6	12.5	13	3H	2400		–		550		1100		–		1000
8	12	13	3I	2000		–		400		800		–		740	
15 mm	5	11	18	4B	2400		–		600		1200		–		1150
	5	13	19	FC	1000		–		600		1200		–		1200
	6	12.5	18	4C	2000		–		500		1000		–		1000
	6	14	19	FD	1000		–		500		1000		–		1000
	7	14	18	4D	1600		–		450		900		–		850
	7	15	19	FE	1000		–		450		900		–		850
	8	15	18	4F	1200		–		400		800		–		740
	8	17	19	FF	500		–		400		800		–		740
	9	14	18	4H	1200		–		350		700		–		650
	9	16	18	4J	900		–		350		700		–		650
	10	18	19	FG	500		–		300		650		–		590
11	14	18	4M	1000		–		300		600		–		540	
22.5 mm	5	14	26.5	5A	1200		–		–		800		–		770
	6	15	26.5	5B	1000		–		–		700		–		640
	7	16.5	26.5	5D	760		–		–		600		–		550
	8	20	28	FH	500		–		–		500		–		480
	8.5	18.5	26.5	5F	500		–		–		480		–		450
	10	22	28	FI	540*		–		–		420		–		380
	10.5	19	26.5	5G	680*		–		–		400		–		360
	10.5	20.5	26.5	5H	680*		–		–		400		–		360
	11	21	26.5	5I	680*		–		–		380		–		350
	12	24	28	FJ	450*		–		–		350		–		310

* TPS (Tray-Packing-System). Plate versions may have different packing units.
Samples and pre-production needs on request.

■ Moulded versions.

Rights reserved to amend design data without prior notification.

Packing Quantities for Capacitors with Radial Pins in PCM 27.5 mm to 52.5 mm

PCM	Size				bulk	ROLL		pcs. per packing unit				AMMO			
								REEL							
	W	H	L	Codes		H16.5	H18.5	ø 360	ø 500	340 × 340	490 × 370	H16.5	H18.5	H16.5	H18.5
					S	N	O	F	I	H	J	A	C	B	D
27.5 mm	9	19	31.5	6A	640*	–	–	–	–	460/340*	–	–	–	420	–
	11	21	31.5	6B	544*	–	–	–	–	380/280*	–	–	–	350	–
	13	24	31.5	6D	448*	–	–	–	–	300	–	–	–	290	–
	13	25	33	FK	336*	–	–	–	–	–	–	–	–	–	–
	15	26	31.5	6F	288*	–	–	–	–	270	–	–	–	250	–
	15	26	33	FL	288*	–	–	–	–	–	–	–	–	–	–
	17	29	31.5	6G	176*	–	–	–	–	–	–	–	–	–	–
	17	34.5	31.5	6I	176*	–	–	–	–	–	–	–	–	–	–
	20	32	33	FM	216*	–	–	–	–	–	–	–	–	–	–
	20	39.5	31.5	6J	144*	–	–	–	–	–	–	–	–	–	–
37.5 mm	9	19	41.5	7A	480*	–	–	–	–	–	–	–	–	–	–
	11	22	41.5	7B	408*	–	–	–	–	–	–	–	–	–	–
	13	24	41.5	7C	252*	–	–	–	–	–	–	–	–	–	–
	15	26	41.5	7D	144*	–	–	–	–	–	–	–	–	–	–
	17	29	41.5	7E	132*	–	–	–	–	–	–	–	–	–	–
	19	32	41.5	7F	108*	–	–	–	–	–	–	–	–	–	–
	20	39.5	41.5	7G	108*	–	–	–	–	–	–	–	–	–	–
	24	45.5	41.5	7H	84*	–	–	–	–	–	–	–	–	–	–
	27	15	41.5	7M	100*	–	–	–	–	–	–	–	–	–	–
	31	46	41.5	7I	72*	–	–	–	–	–	–	–	–	–	–
	35	50	41.5	7J	35*	–	–	–	–	–	–	–	–	–	–
	40	55	41.5	7K	28*	–	–	–	–	–	–	–	–	–	–
48.5 mm	19	31	56	8D	50*	–	–	–	–	–	–	–	–	–	–
	23	34	56	8E	72*	–	–	–	–	–	–	–	–	–	–
	27	37.5	56	8H	60*	–	–	–	–	–	–	–	–	–	–
	33	48	56	8J	48*	–	–	–	–	–	–	–	–	–	–
	37	54	56	8L	25*	–	–	–	–	–	–	–	–	–	–
52.5 mm	35	50	57	9F	25*	–	–	–	–	–	–	–	–	–	–
	45	55	57	9H	20*	–	–	–	–	–	–	–	–	–	–
	45	65	57	9J	20*	–	–	–	–	–	–	–	–	–	–

* for 2-inch transport pitches.

* TPS (Tray-Packing-System). Plate versions may have different packing units.
Samples and pre-production needs on request.

■ Moulded versions.

Rights reserved to amend design data without prior notification.

Updated data on www.wima.com

WIMA Part Number System

A WIMA part number consists of 18 digits and is composed as follows:

Field 1 - 4: Type description
 Field 5 - 6: Rated voltage
 Field 7 - 10: Capacitance
 Field 11 - 12: Size and PCM
 Field 13 - 14: Version code (e.g. Snubber versions)
 Field 15: Capacitance tolerance
 Field 16: Packing
 Field 17 - 18: Pin length (untaped)

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
M	K	S	2	C	0	2	1	0	0	1	A	0	0	M	S	S	D
MKS 2				63 VDC		0.01 μF			2.5x6.5x7.2			-		20%	bulk	6 -2	
Type description:				Rated voltage:		Capacitance:			Size:			Tolerance:		Packing:			
SMD-PET = SMDT				50 VDC = B0		22 pF = 0022			4.8x3.3x3 Size 1812 = KA			±20% = M		AMMO H16.5 340x340 = A			
SMD-PEN = SMDN				63 VDC = C0		47 pF = 0047			4.8x3.3x4 Size 1812 = KB			±10% = K		AMMO H16.5 490x370 = B			
SMD-PPS = SMDI				100 VDC = D0		100 pF = 0100			5.7x5.1x3.5 Size 2220 = QA			±5% = J		AMMO H18.5 340x340 = C			
FKP 02 = FKPO				250 VDC = F0		150 pF = 0150			5.7x5.1x4.5 Size 2220 = QB			±2.5% = H		AMMO H18.5 490x370 = D			
MKS 02 = MKS0				400 VDC = G0		220 pF = 0220			7.2x6.1x3 Size 2824 = TA			±1 % = E		REEL H16.5 360 = F			
FKS 2 = FKS2				450 VDC = H0		330 pF = 0330			7.2x6.1x5 Size 2824 = TB			...		REEL H16.5 500 = H			
FKP 2 = FKP2				600 VDC = I0		470 pF = 0470			10.2x7.6x5 Size 4030 = VA					REEL H18.5 360 = I			
MKS 2 = MKS2				630 VDC = J0		680 pF = 0680			12.7x10.2x6 Size 5040 = XA					REEL H18.5 500 = J			
MKP 2 = MKP2				700 VDC = K0		1000 pF = 1100			15.3x13.7x7 Size 6054 = YA					ROLL H16.5 = N			
FKS 3 = FKS3				800 VDC = L0		1500 pF = 1150			2.5x7x4.6 PCM 2.5 = 0B					ROLL H18.5 = O			
FKP 3 = FKP3				850 VDC = M0		2200 pF = 1220			3x7.5x4.6 PCM 2.5 = 0C					BLISTER W12 180 = P			
MKS 4 = MKS4				900 VDC = N0		3300 pF = 1330			2.5x6.5x7.2 PCM 5 = 1A					BLISTER W12 330 = Q			
MKP 4 = MKP4				1000 VDC = O1		4700 pF = 1470			3x7.5x7.2 PCM 5 = 1B					BLISTER W16 330 = R			
MKP 10 = MKP1				1100 VDC = P0		6800 pF = 1680			2.5x7x10 PCM 7.5 = 2A					BLISTER W24 330 = T			
FKP 4 = FKP4				1200 VDC = Q0		0.01 μF = 2100			3x8.5x10 PCM 7.5 = 2B					Bulk/TPS Standard = S			
FKP 1 = FKP1				1250 VDC = R0		0.022 μF = 2220			3x9x13 PCM 10 = 3A					...			
MKP-X2 = MKX2				1500 VDC = S0		0.047 μF = 2470			4x9x13 PCM 10 = 3C								
MKP-X2 R = MKXR				1600 VDC = T0		0.1 μF = 3100			5x11x18 PCM 15 = 4B								
MKP-X1 R = MKX1				2000 VDC = U0		0.22 μF = 3220			6x12.5x18 PCM 15 = 4C								
MKP-Y2 = MKY2				2500 VDC = V0		0.47 μF = 3470			5x14x26.5 PCM 22.5 = 5A								
MP 3-X2 = MPX2				3000 VDC = W0		1 μF = 4100			6x15x26.5 PCM 22.5 = 5B								
MP 3-X1 = MPX1				4000 VDC = X0		2.2 μF = 4220			9x19x31.5 PCM 27.5 = 6A								
MP 3-Y2 = MPY2				6000 VDC = Y0		4.7 μF = 4470			11x21x31.5 PCM 27.5 = 6B								
MP 3R-Y2 = MPRY				250 VAC = 0W		10 μF = 5100			9x19x41.5 PCM 37.5 = 7A								
Snubber MKP = SNMP				275 VAC = 1W		22 μF = 5220			11x22x41.5 PCM 37.5 = 7B								
Snubber FKP = SNFP				300 VAC = 2W		47 μF = 5470			19x31x56 PCM 48.5 = 8D								
GTO MKP = GTOM				305 VAC = AW		100 μF = 6100			35x50x57 PCM 52.5 = 9F								
DC-LINK MKP 3 = DCP3				400 VAC = 3W		220 μF = 6220			...								
DC-LINK MKP 4 = DCP4				440 VAC = 4W		1000 μF = 7100											
DC-LINK MKP 4S = DCP5				500 VAC = 5W		1500 μF = 7150											
DC-LINK MKP 5 = DCP5				...		...											
DC-LINK MKP 6 = DCP6																	
DC-LINK HC = DCHC																	
DC-LINK HY = DCHY																	